Challenges in Collapse Prediction for Steel Moment Frame Structures

Helmut Krawinkler
Farzin Zareian
Dimitrios Lignos

PEER Annual Meeting, 10/16/09

Loading History Effects Identical Steel Beams

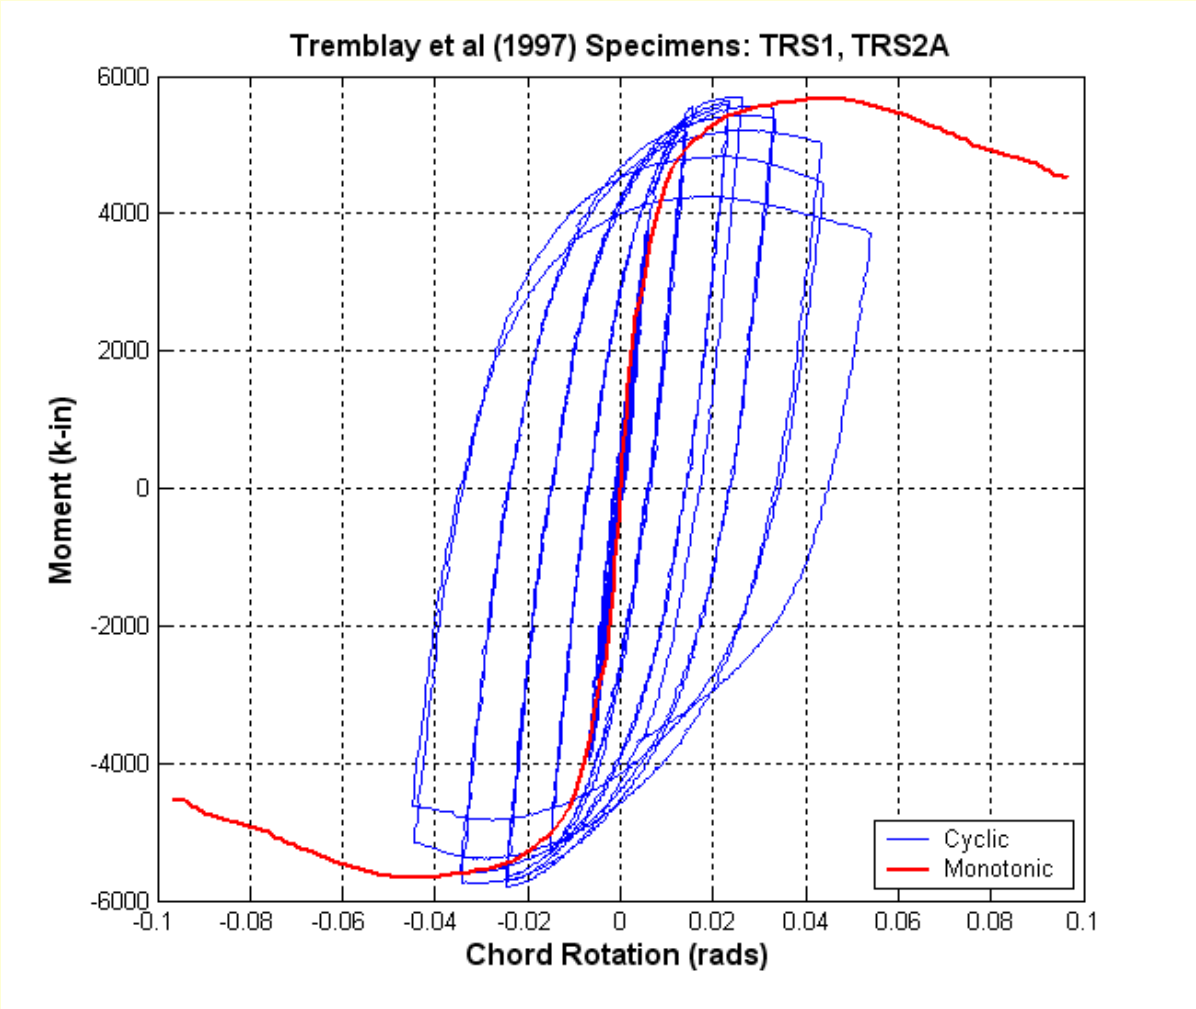

Component Models with Deterioration

1. Backbone Curve:

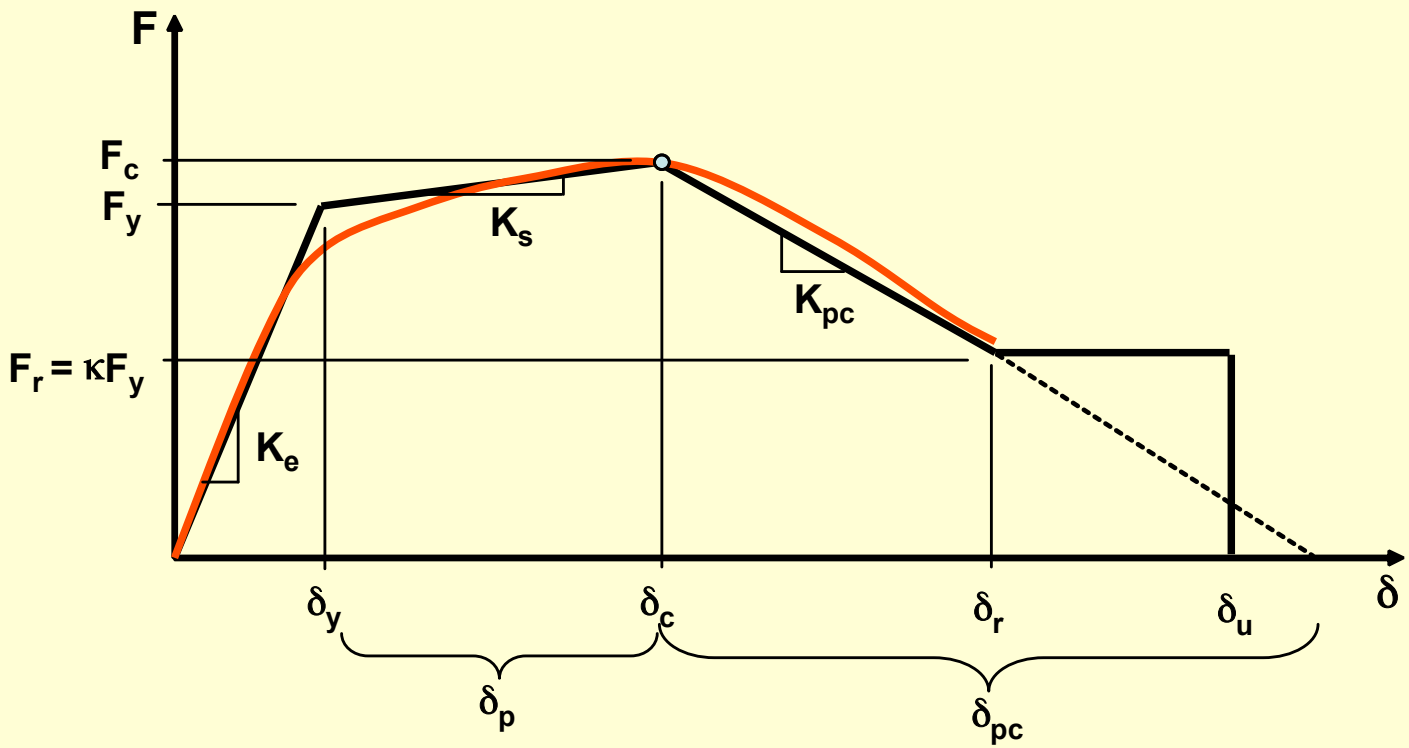

2. Cyclic Deterioration Parameter

Cyclic Deterioration Parameter

A single deterioration parameter:

$$\beta_i = \left(\frac{E_i}{E_t - \sum_{j=1}^{i} E_j} \right)^c$$

in which

β_i	=	parameter defining the deterioration in excursion i
E_i	=	hysteretic energy dissipated in excursion i
E_t	=	hysteretic energy dissipation capacity = $\lambda\theta_p M_y = \Lambda M_y$
$\sum E_j$	=	hysteretic energy dissipated in all previous excursions
c	=	exponent defining the rate of deterioration

Steel Component Modeling

- Deterioration parameters (θ_p, θ_{pc}, Λ) based on database of 300 beam specimens
  - Tests fully documented
  - Separate calibrations for RBS and "other-than RBS" connections
  - Deterioration due to local and lateral torsional buckling
  - Sensitivity to geometric parameters
    - d, L/d, L_b/r_y, d/t_w, b/t
  - Inadequate data for columns (heavy sections, axial load effect)

Calibration Process

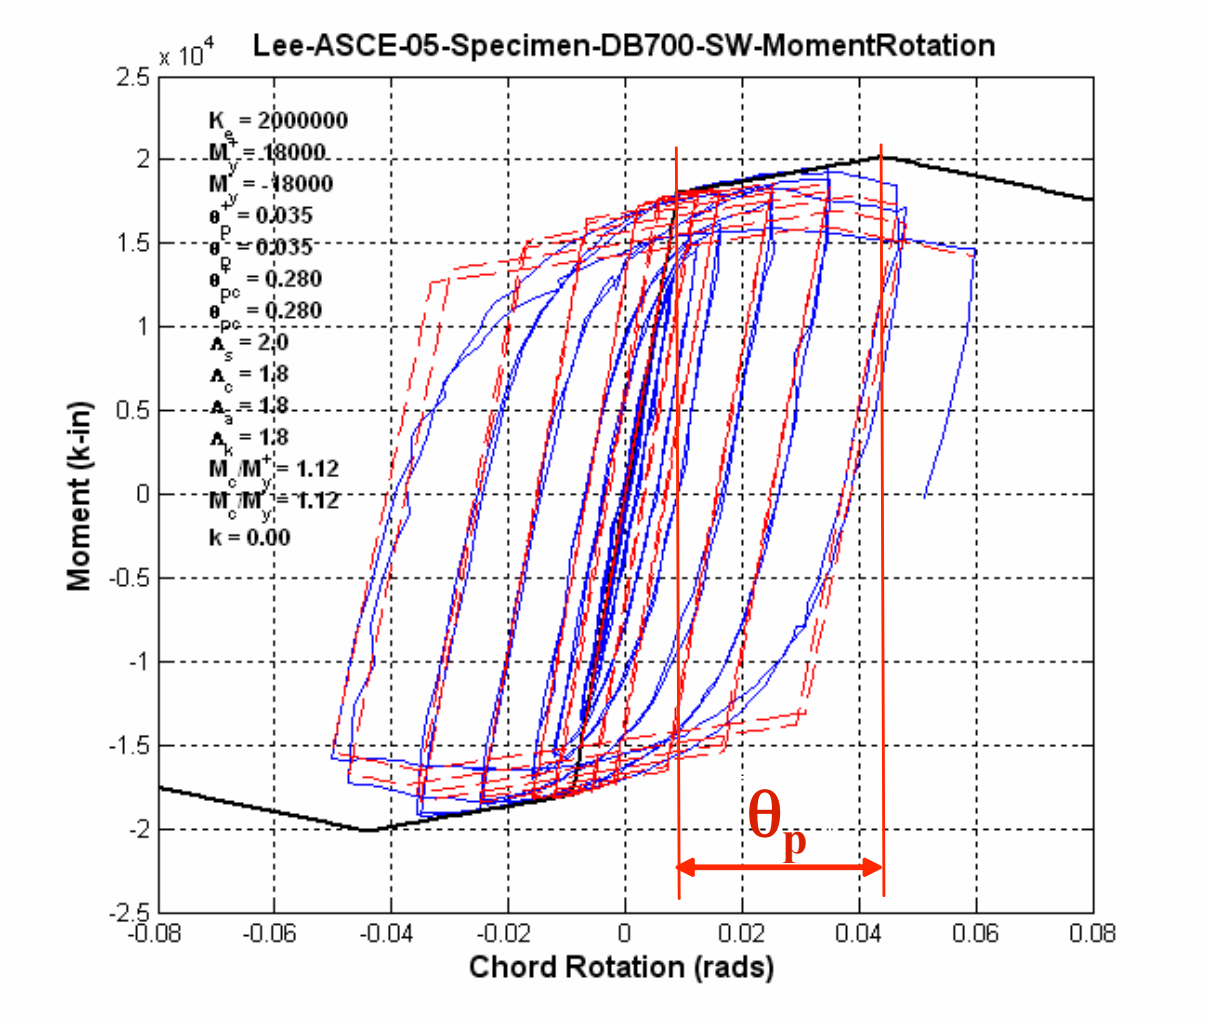

Statistics for θ_p

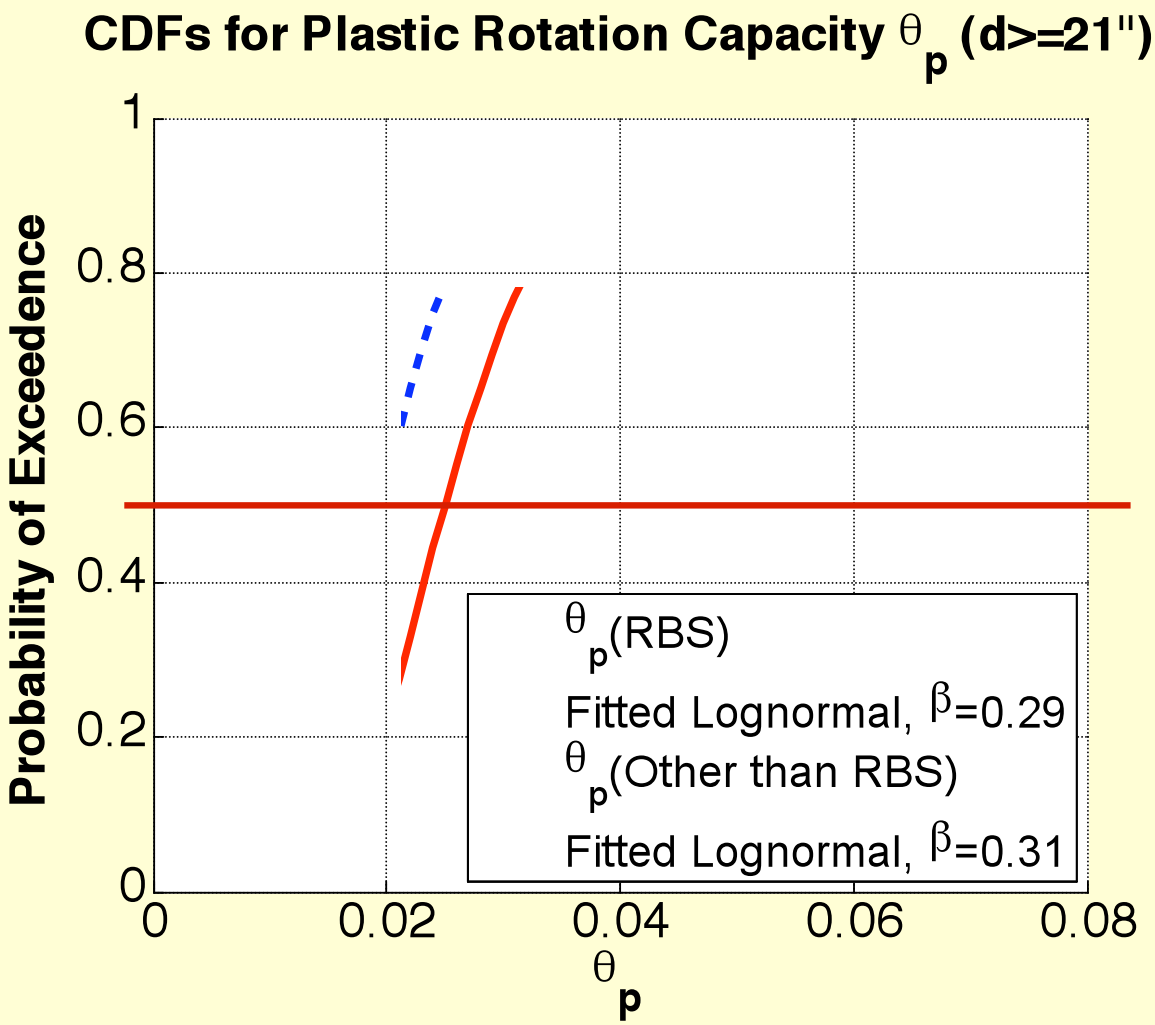

Statistics for θ_{pc}

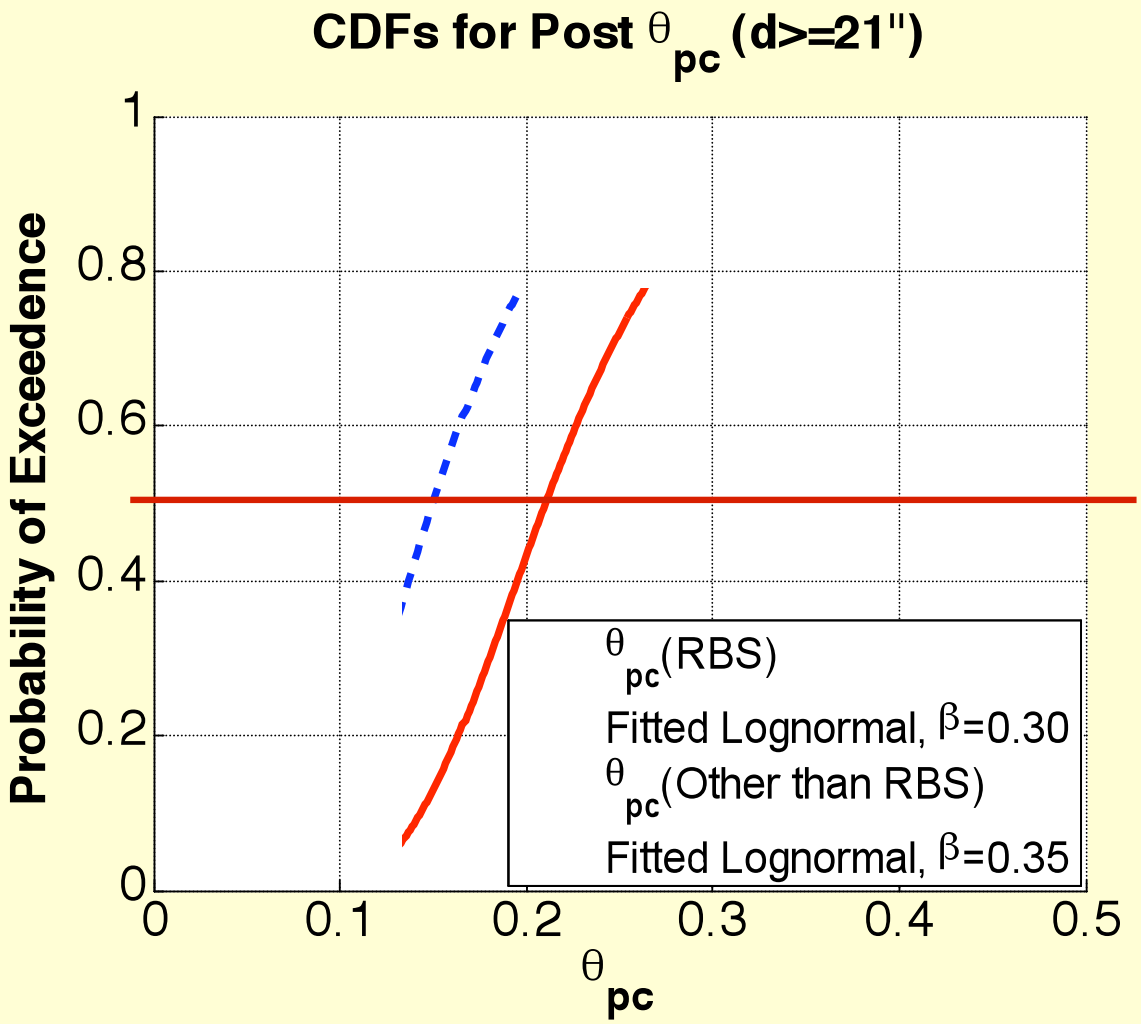

Statistics for Λ

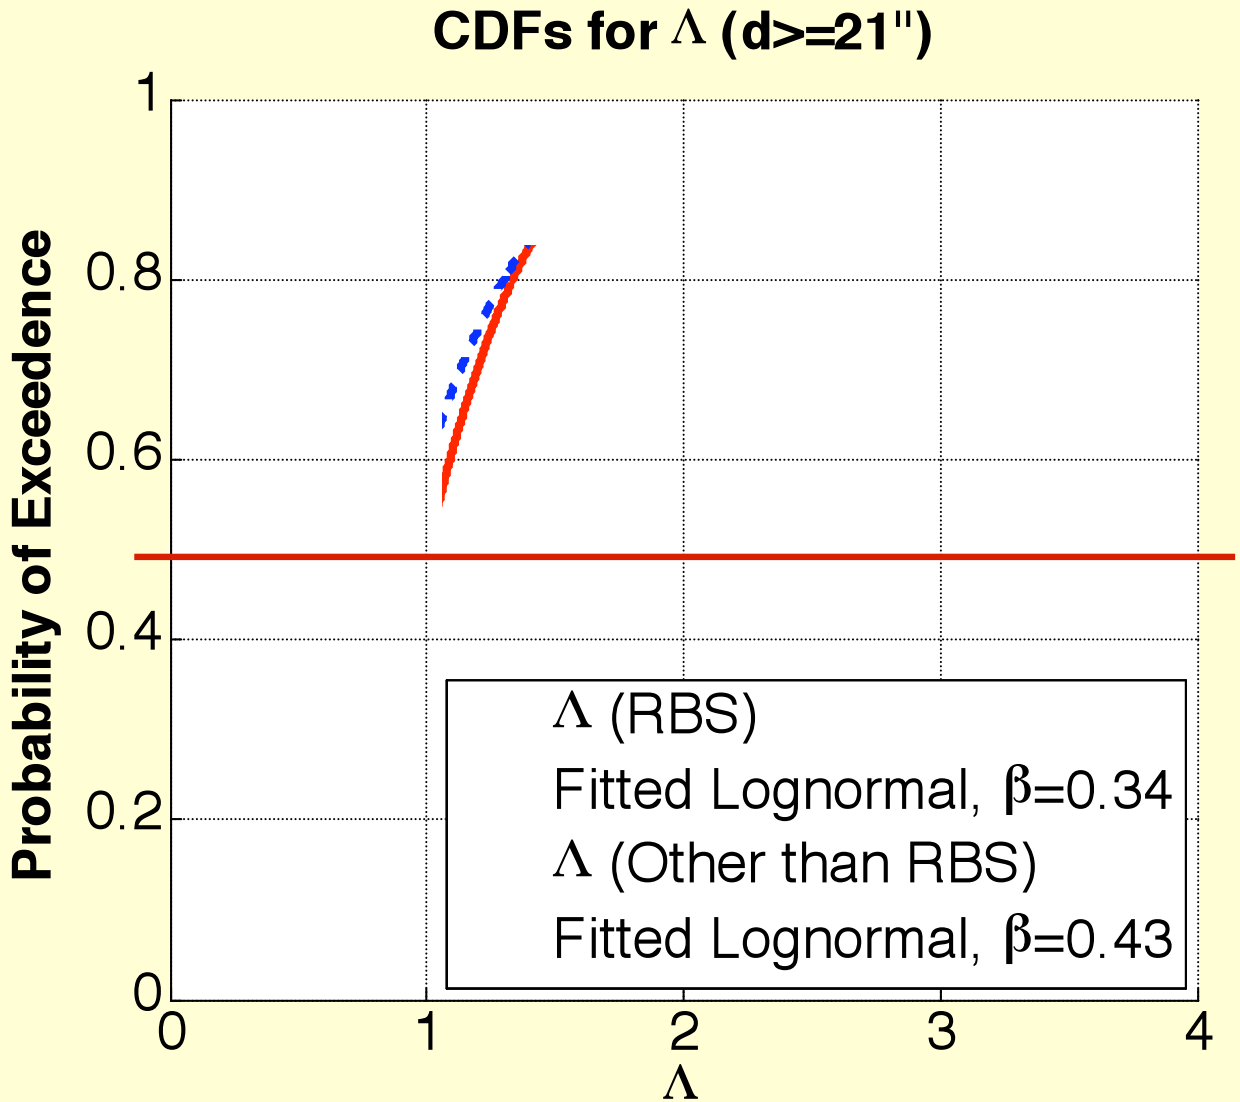

Component Modeling

Results from database:

Regression eqs. for deterioration parameters, e.g.,

$$\theta_p = 0.087 \cdot \left(\frac{h}{t_w}\right)^{-0.365} \cdot \left(\frac{b_f}{2 \cdot t_f}\right)^{-0.14} \cdot \left(\frac{L}{d}\right)^{0.34} \cdot \left(\frac{d}{c_{unit}^{1} \cdot 21''}\right)^{-0.721} \cdot \left(\frac{c_{unit}^{2} \cdot F_y}{50}\right)^{-0.23}$$

Section	θ_p (rad)	θ_{pc} (rad)	Λ
W14x257	0.078	0.53	10.2
W24x207	0.034	0.28	2.8
W36x150	0.017	0.12	0.8

Implementation: Collapse Prediction for Archetype Steel Moment Frame Structures

- Part of ATC 76-1 project
- Testing of FEMA P695 (ATC-63) methodology for collapse prediction

Steel SMRF Archetypes

- Occupancy - Office
- Number of stories:
  - 1, 2, 4, 8, 12, 20
- Story heights:
  - First story = 15’
  - Other stories, h = 13’
  - 3 bays @20’ MRF only
- Perimeter frames only
- RBS connections

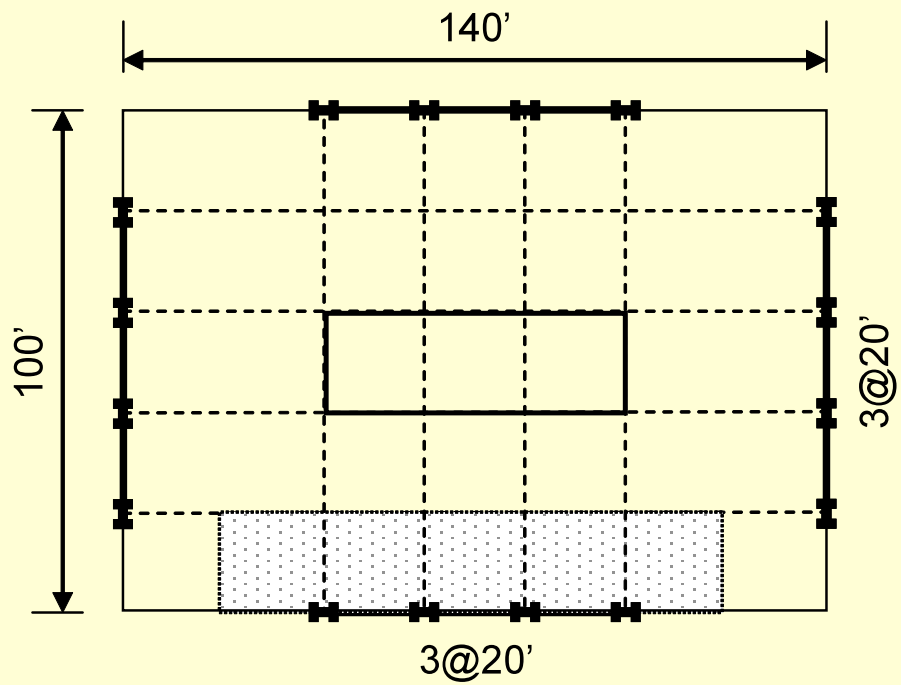

Performance Groups

- Seismic Design Categories:
  - D – maximum:
    - Ss = 1.5g, S1 = 0.6g
    - S_{DS} = (2/3)(1.0*1.5) = 1.0g
    - S_{D1} = (2/3)(1.5*0.6) = 0.6g
  - D – minimum:
    - Ss = 0.55g, S1 = 0132g
    - S_{DS} = (2/3)(1.36*0.55) = 0.50g
    - S_{D1} = (2/3)(2.28*0.13) = 0.20g
- Design Procedures
  - ELF design
  - RSA design

What Controls Design of Steel SMF?

- Code strength design is mostly irrelevant
- Most member sizes are controlled by drift limitations or P-Delta design requirements
- For taller frame structures largest beam sizes are required around midheight in order to control drift
- Because of strong-column / weak girder design requirements largest columns are also around midheight for taller frame structures
- This leads to “excessive” column sizes close to bottom of structure
- For taller frames, ELF designs become “irrational”

20-story, D_{max} -- ELF & RSA

20-story ELF

20		W40x211	
19	w36x330	W40x211	w36x395
18	w36x330	W40x397	w36x395
17	w36x441	W40x397	w36x441
16	w36x441	W40x503	w36x441
15	w36x441	W40x503	w36x529
14	w36x441	W40x593	w36x529
13	w36x441	W40x593	w36x652
12	w36x441	W40x593	w36x652
11	w36x441	W40x593	w36x652
10	w36x441	W40x503	w36x652

20-story RSA

20		W24x62	
19	w24x62	W24x62	w24x103
18	w24x62	W30x108	w24x103
17	w24x94	W30x108	w24x103
16	w24x94	W30x108	w24x103
15	w24x131	W30x108	w24x162
14	w24x131	W30x116	w24x162
13	w24x162	W30x116	w24x192
12	w24x162	W30x116	w24x192
11	w24x162	W30x116	w24x229
10	w24x162	W30x116	w24x229

Overstrength

Large overstrength for most buildings is direct result of drift or P-Delta controlling member sizes

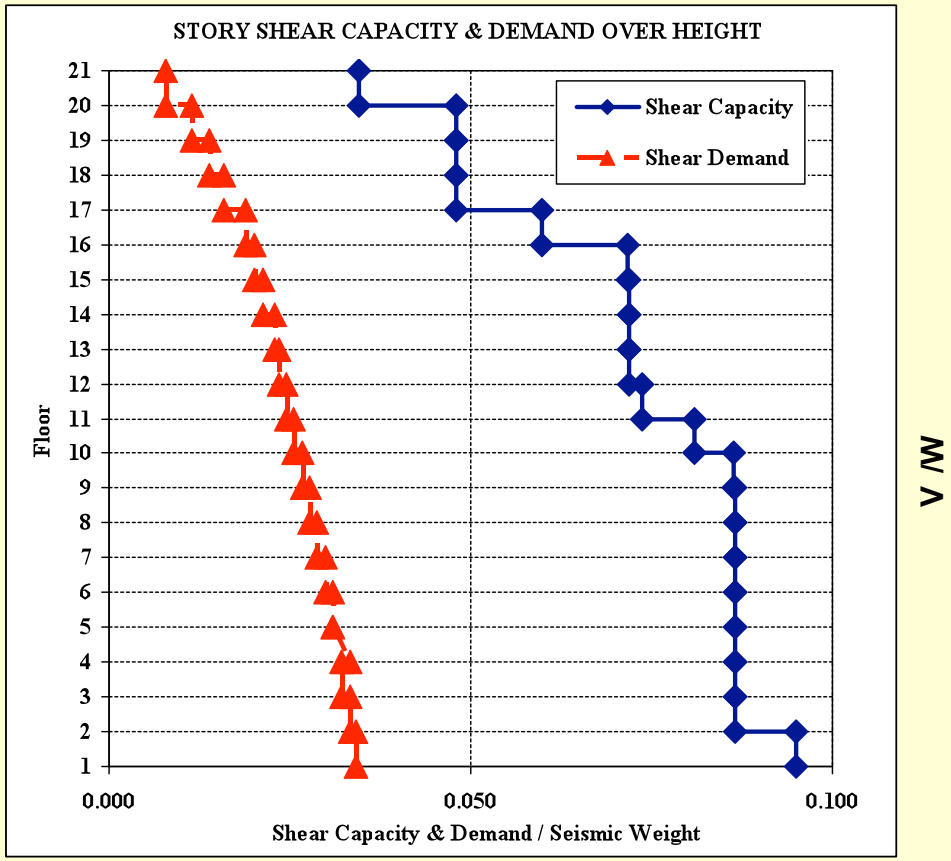

V /W

Analytical Modeling of Structure

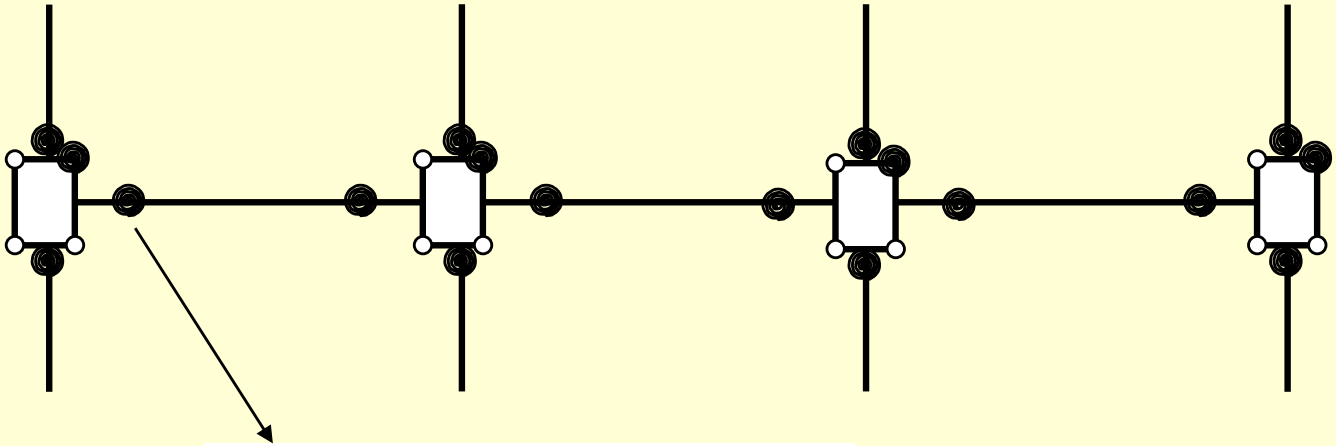

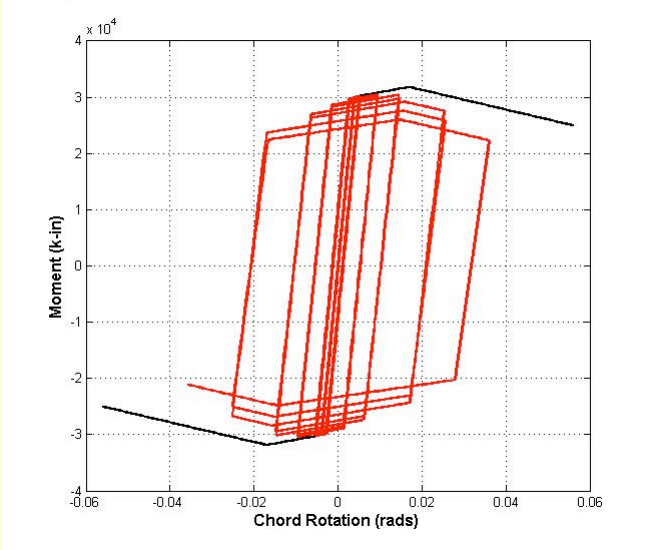

Panel Zone Modeling

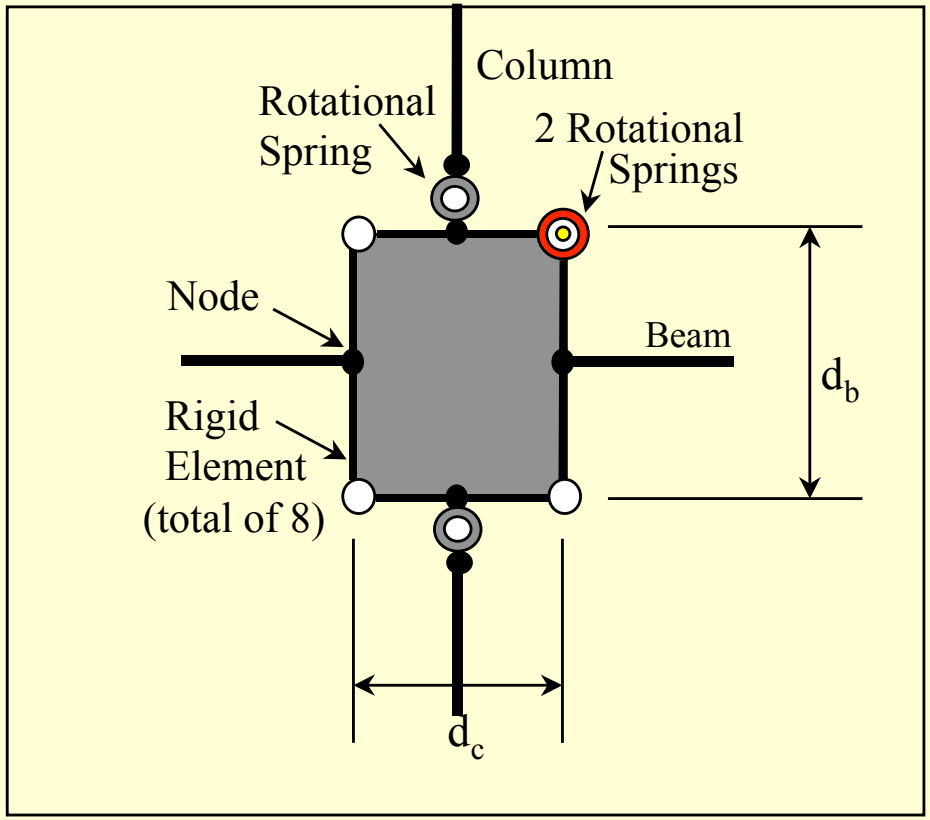

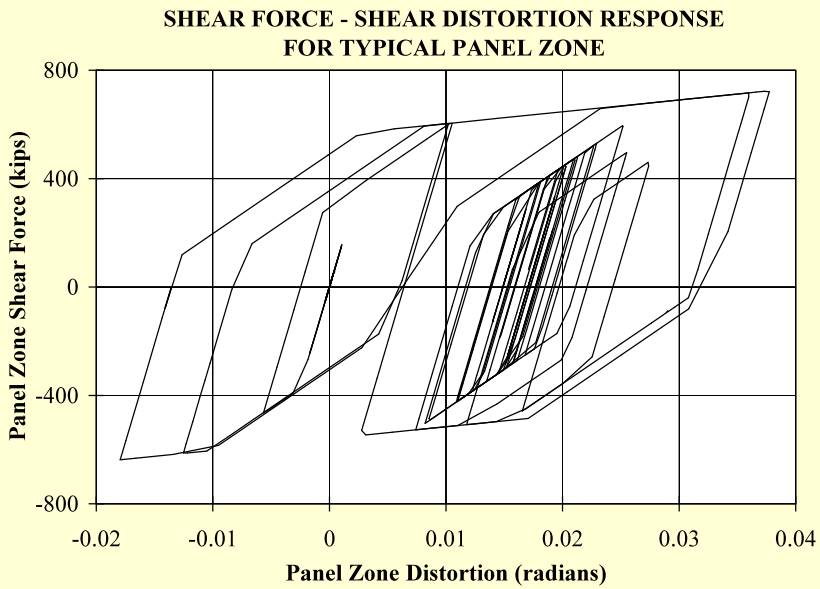

Modeling of Plastic Hinging in Columns (Axial Load Effects)

- Heavy W14 Columns are very ductile, even if large axial loads are present

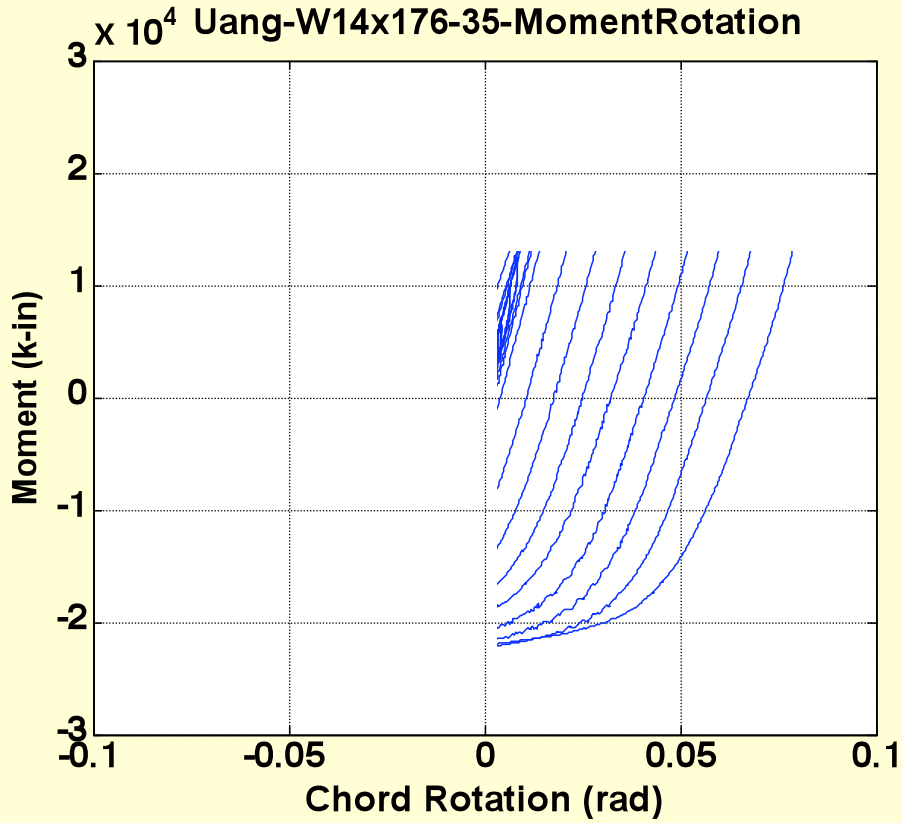

C.M. Uang

Modeling of Plastic Hinging in Columns (Axial Load Effects)

- Deep Column are not very ductile

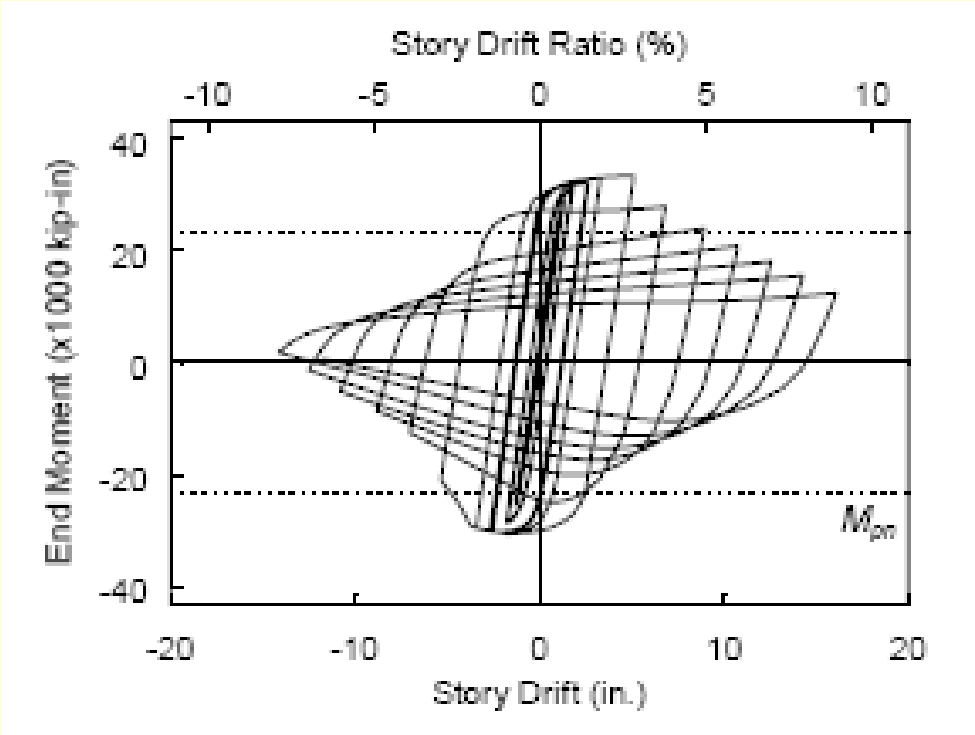

W27x146, P/Py = 0.35

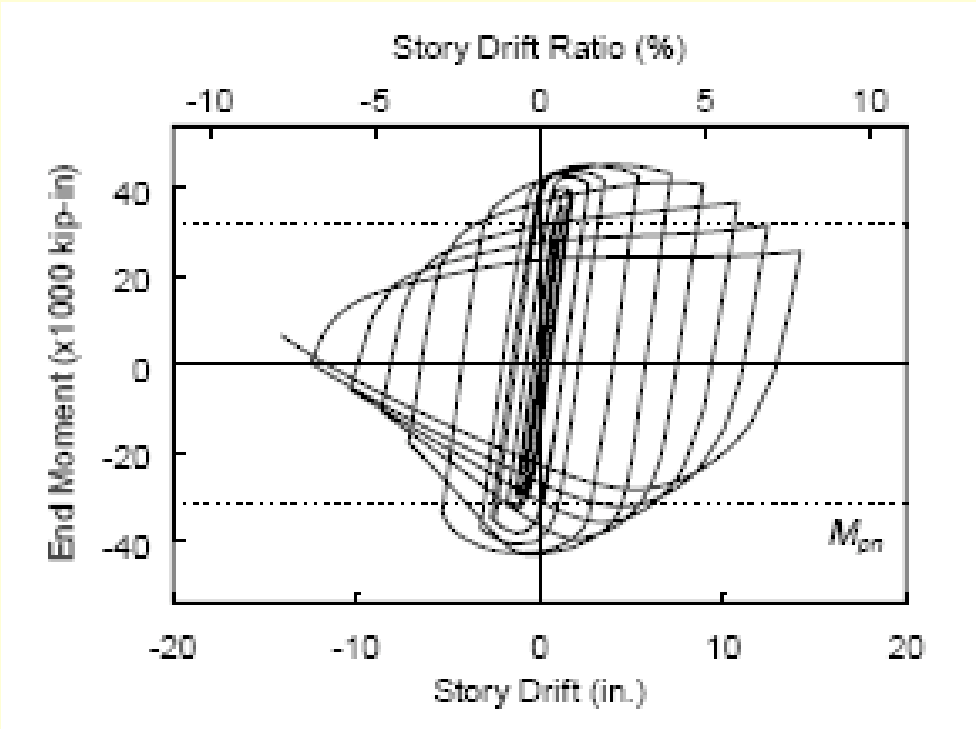

W27x194, P/Py = 0.55

From C.M. Uang

Pushovers

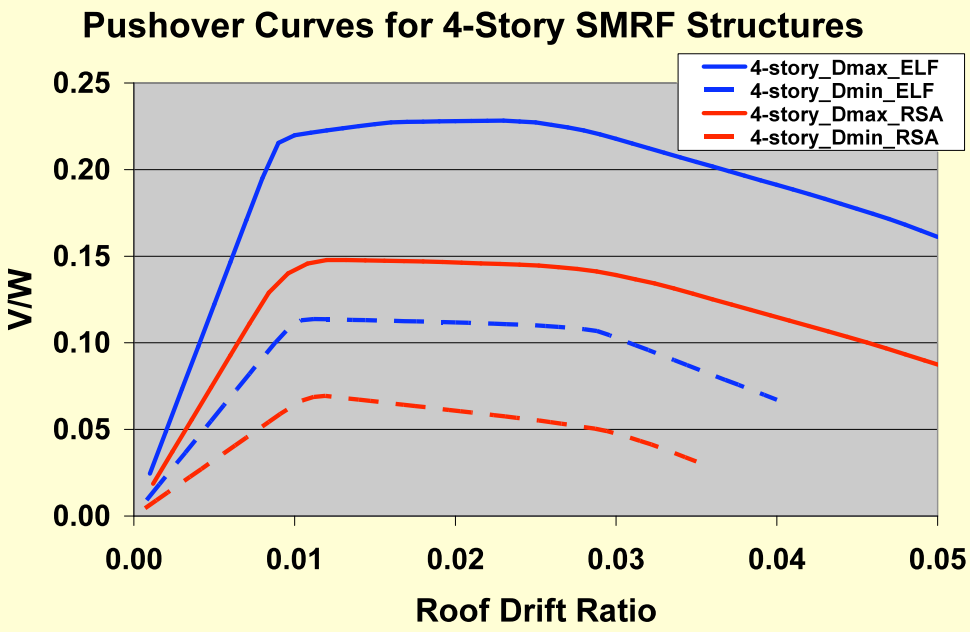
Pushover Curves for 4-Story SMRF Structures
4-story_Dmax_ELF
4-story_Dmin_ELF
4-story_Dmax_RSA
4-story_Dmin_RSA
V/W
0.25
0.20
0.15
0.10
0.05
0.00
0.00
0.01
0.02
0.03
0.04
0.05
Roof Drift Ratio

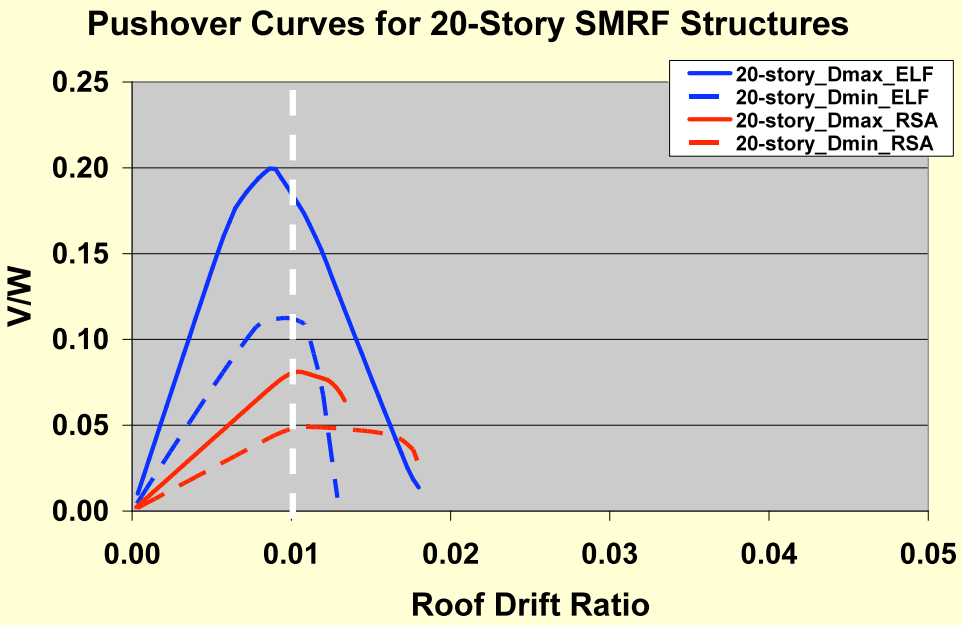
Pushover Curves for 20-Story SMRF Structures
20-story_Dmax_ELF
20-story_Dmin_ELF
20-story_Dmax_RSA
20-story_Dmin_RSA
V/W
0.25
0.20
0.15
0.10
0.05
0.00
0.00
0.01
0.02
0.03
0.04
0.05
Roof Drift Ratio

P-Delta Effect

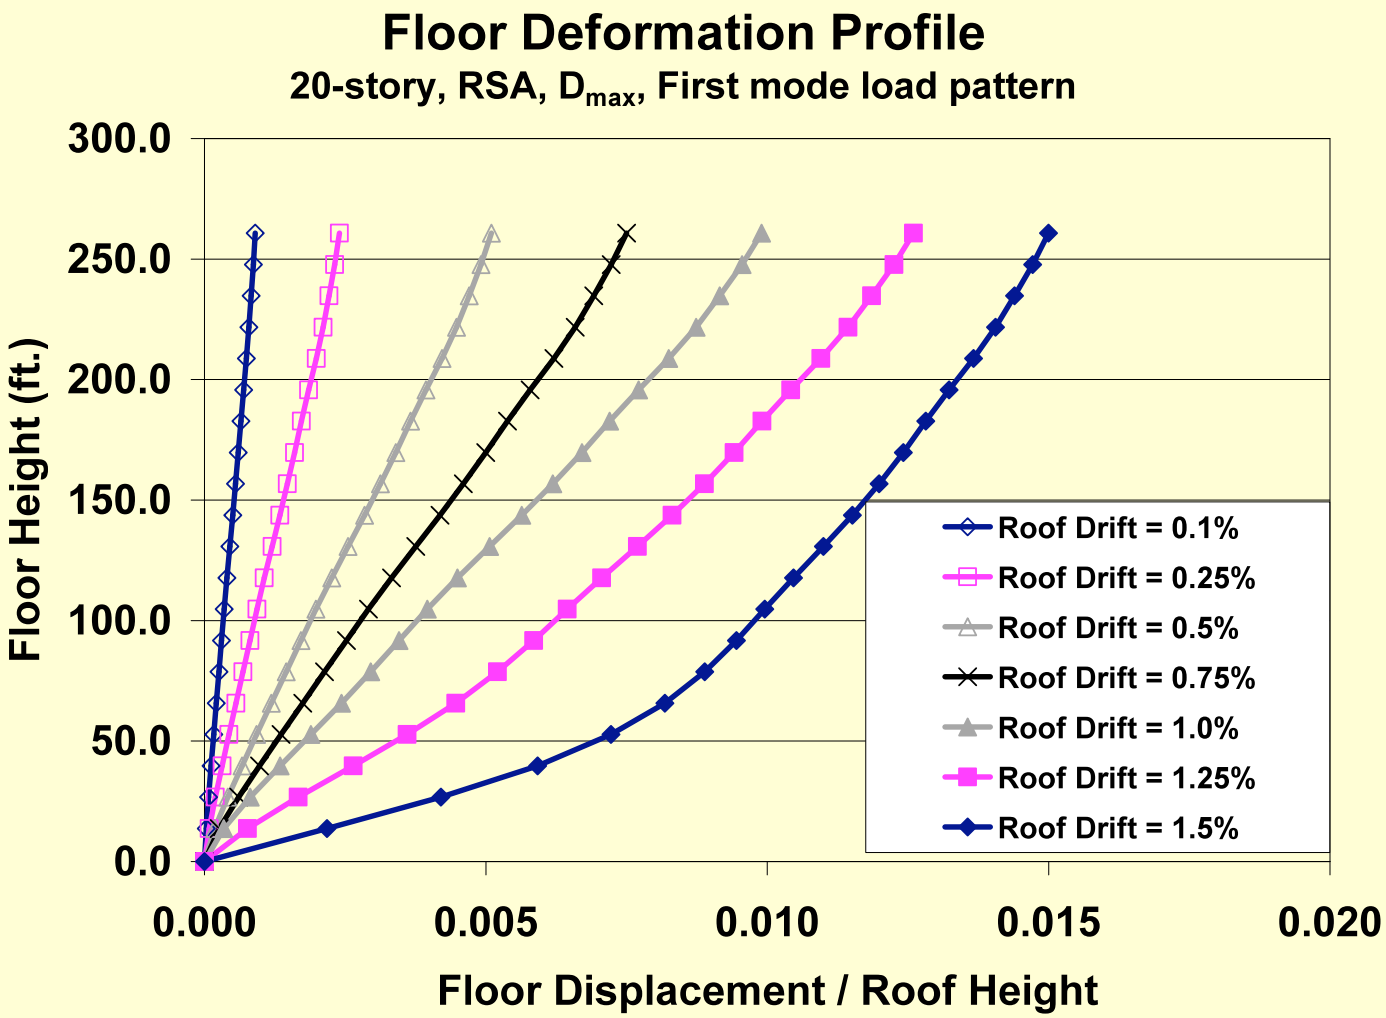

Nonlinear Response History Analysis

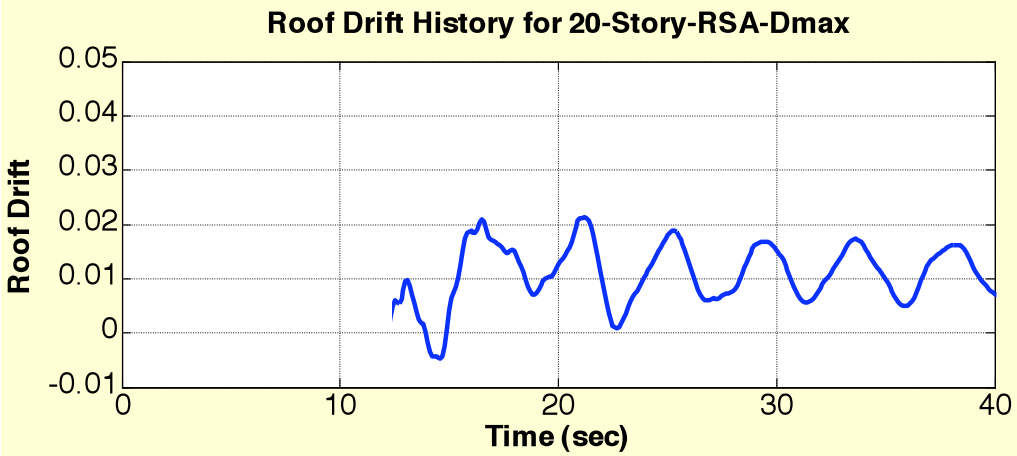

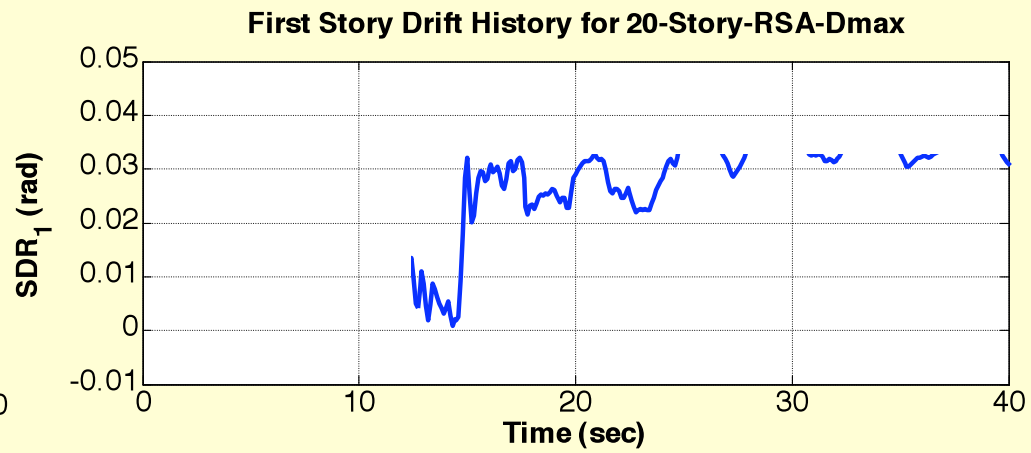

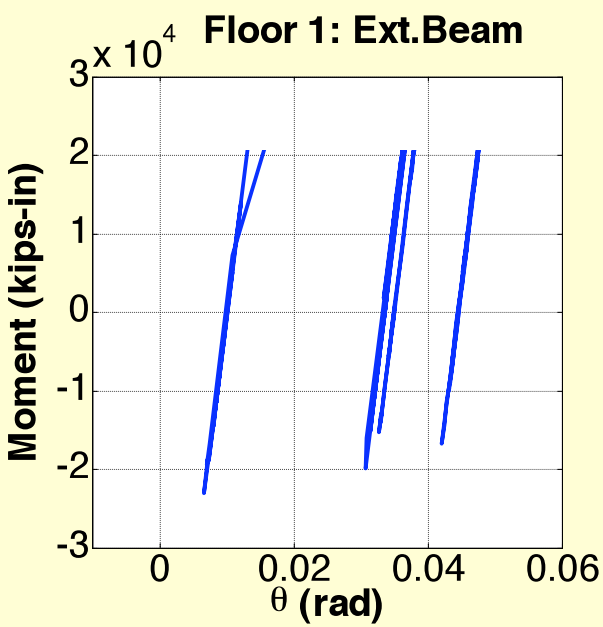

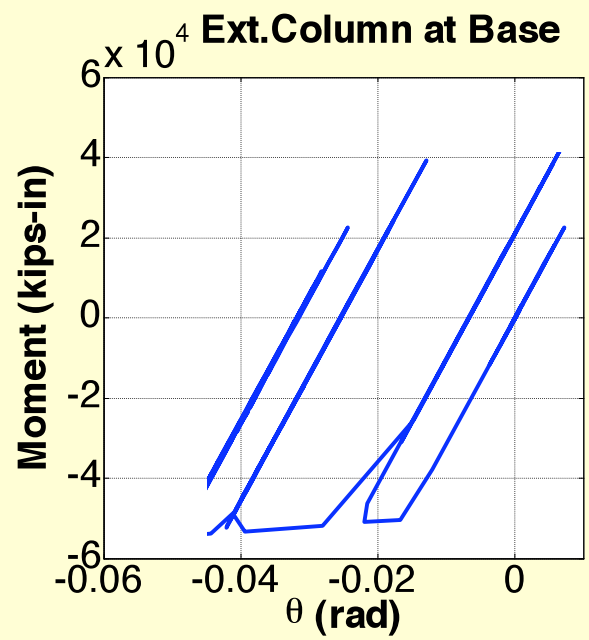

PEER Annual Meeting, 10/16/09

Nonlinear Response History Analysis

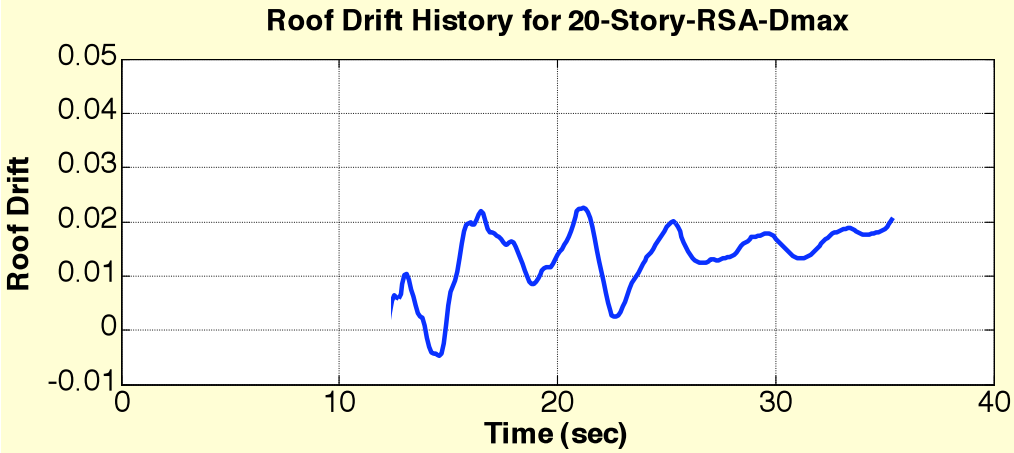

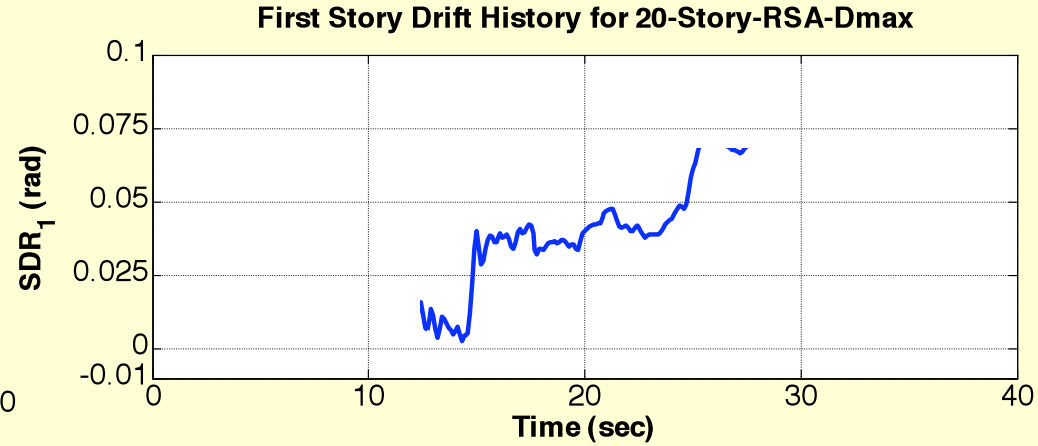

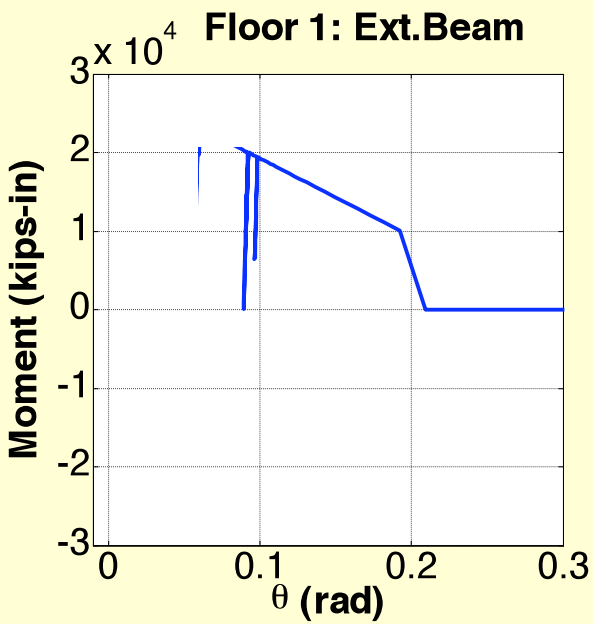

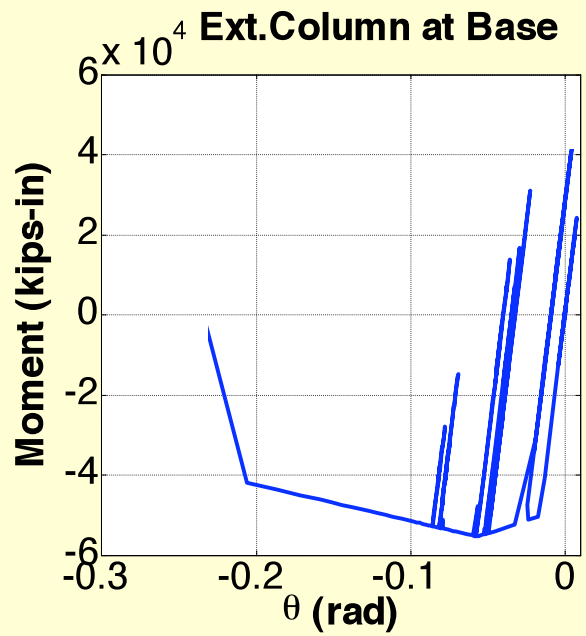

PEER Annual Meeting, 10/16/09

ACMR – From Nonlinear Response History Analysis – 44 Records

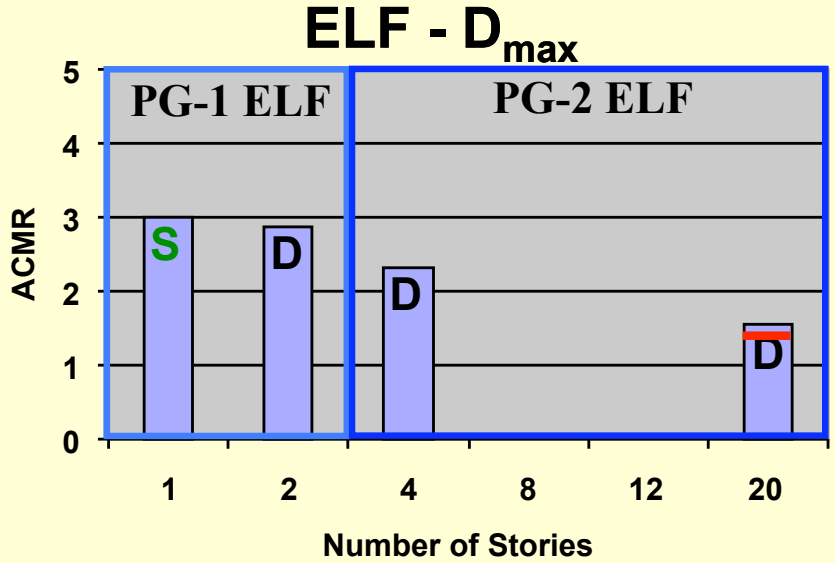

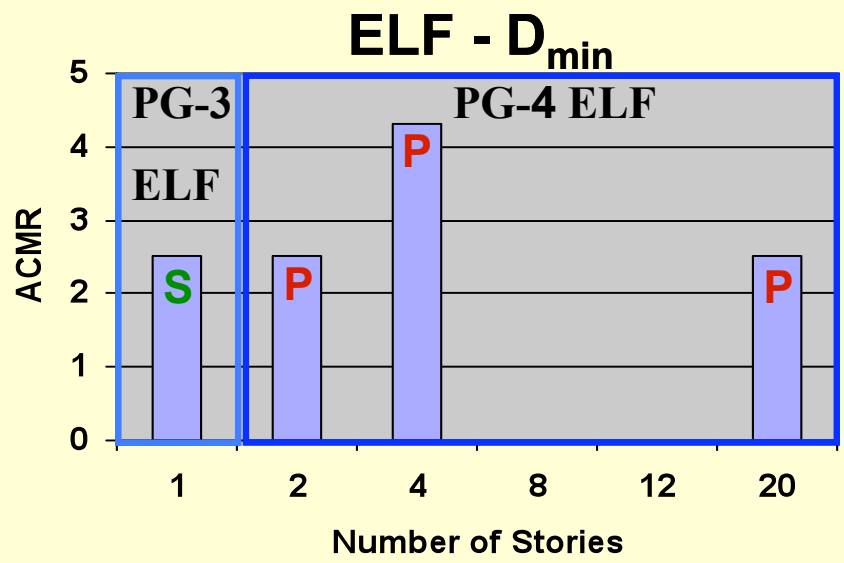

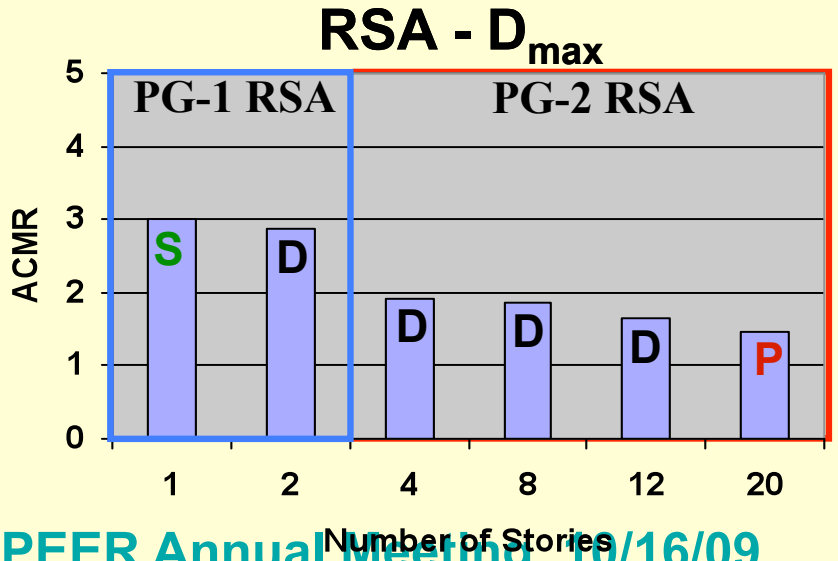

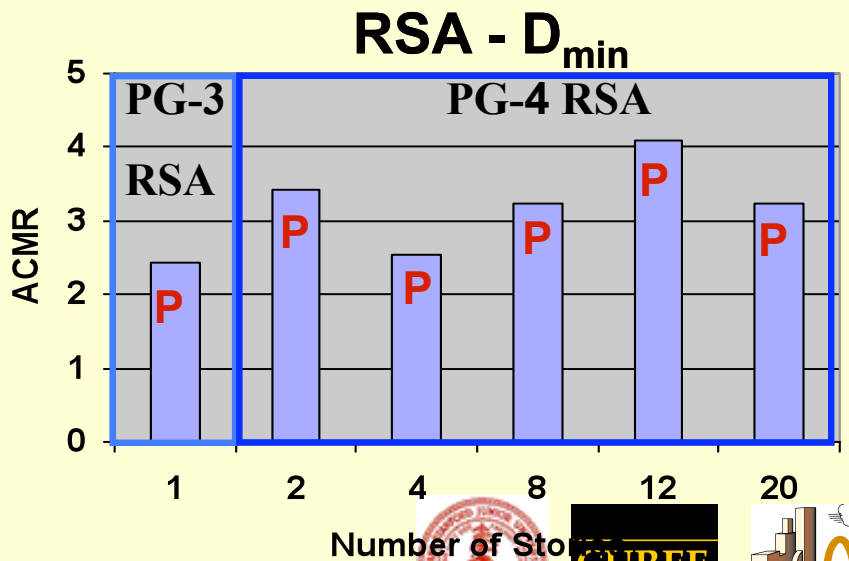

Are Response Predictions for Tall Frame Structures Realistic?

- Probably not because contribution of gravity system to lateral strength and stiffness has been ignored

Remembering SAC 20-story Response Prediction

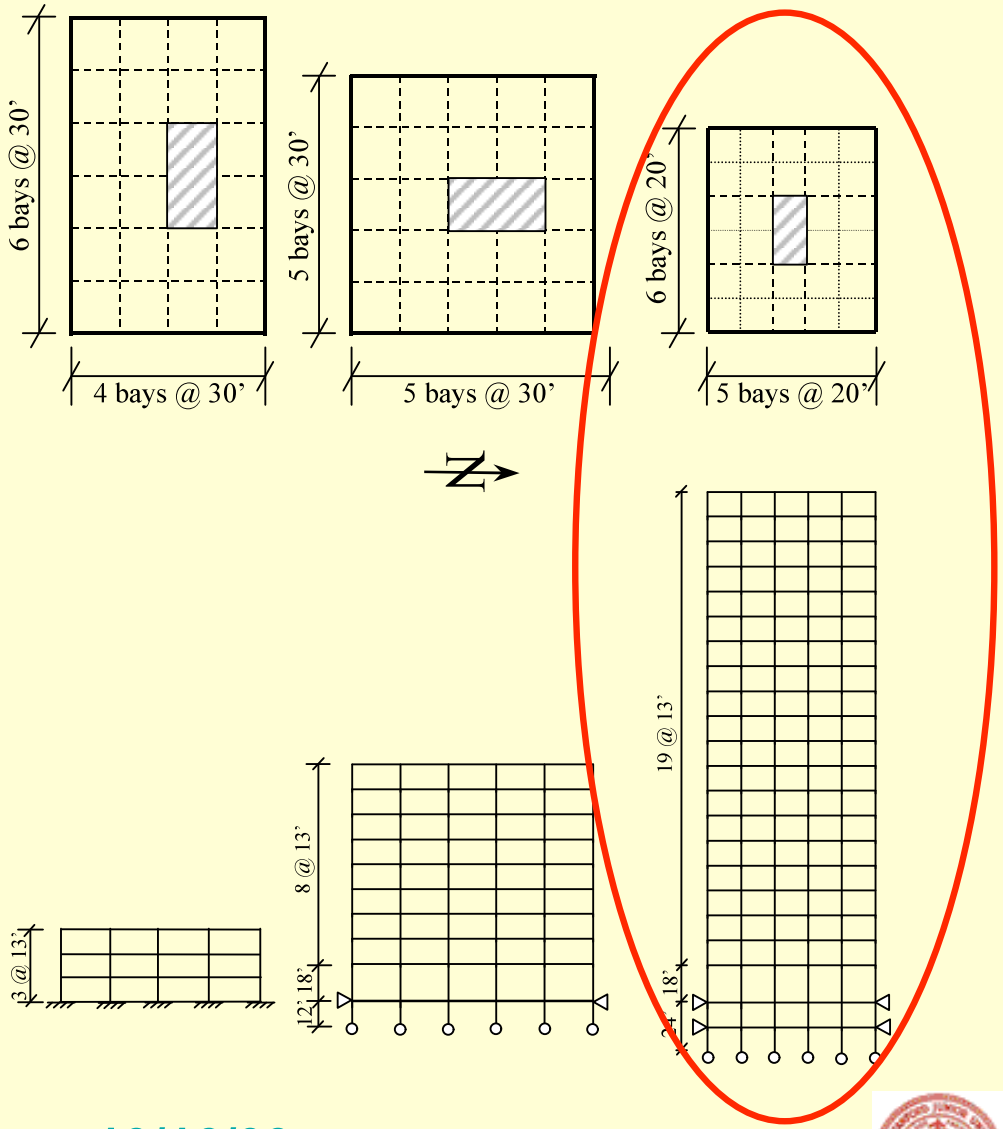

Tabas Record (Record LA30)

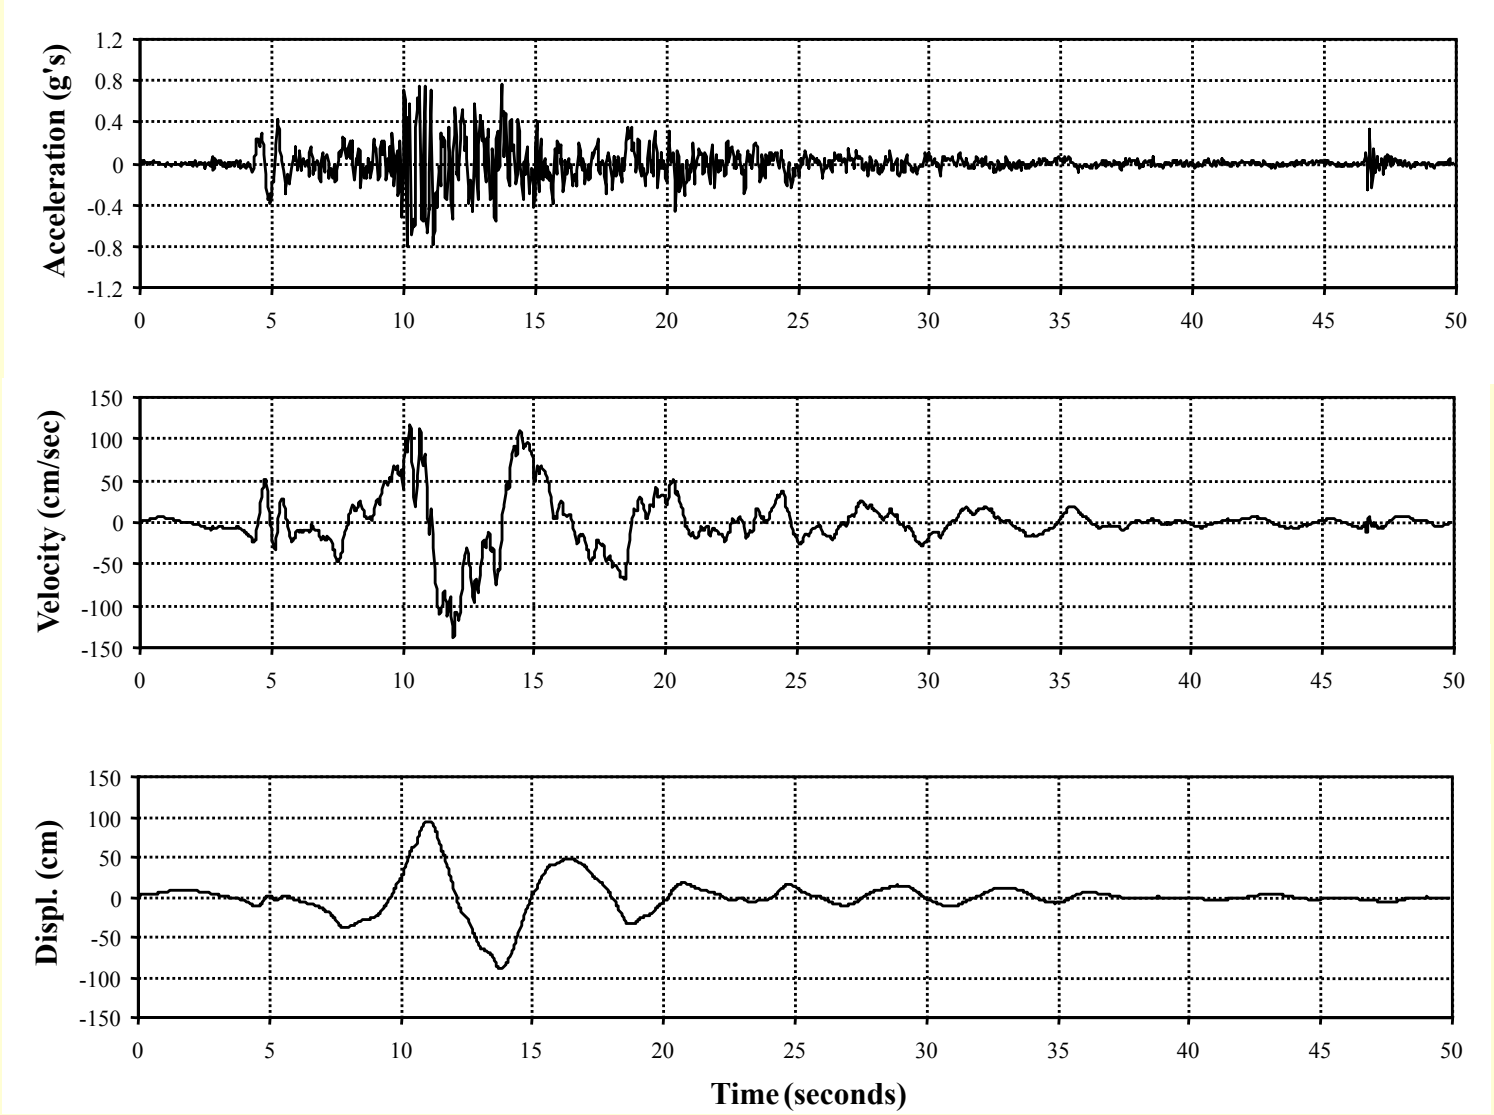

Story 2 Drift Response, LA-20, Various Models

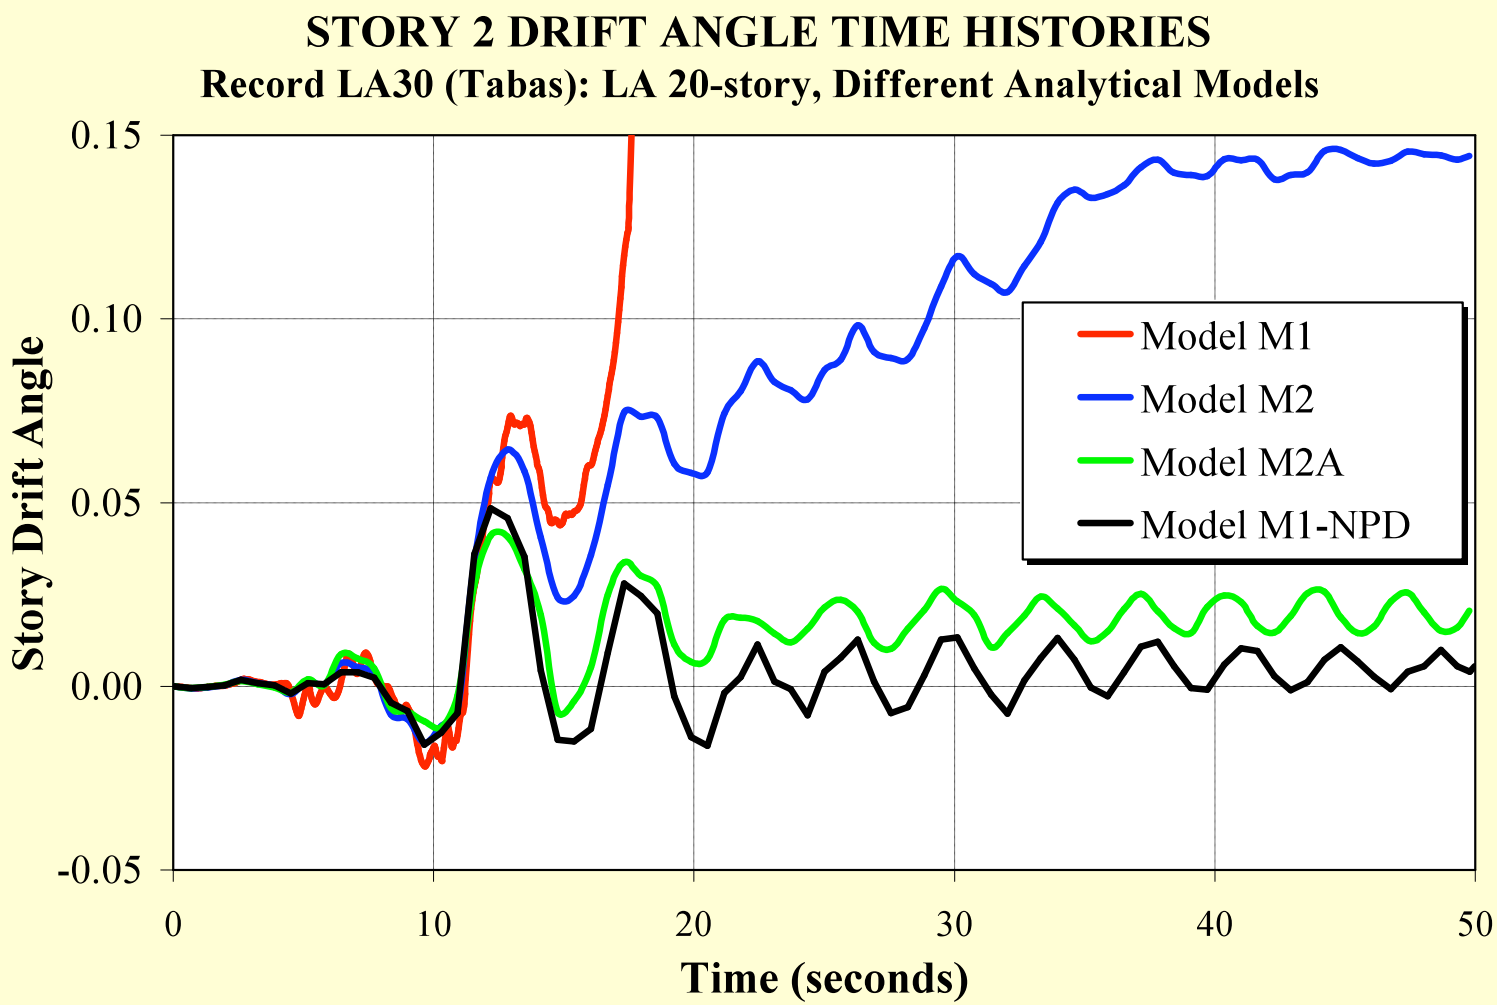

M1 = centerline model

M2 = model with panel zones

M2A = including gravity system

Challenges in Collapse Prediction for Steel Moment Frame Structures

- More data is needed to model plastic hinging in columns in the presence of a large axial load
- There are several missing contributions to lateral strength and stiffness that might improve collapse performance
  - Gravity system (columns and “simple” connections”)
  - Composite slab action
  - Non-tangible contributions (stair cases, exterior cladding)