

Appendix D

Channel Locations and Lists for Specimen TCBF-B-1

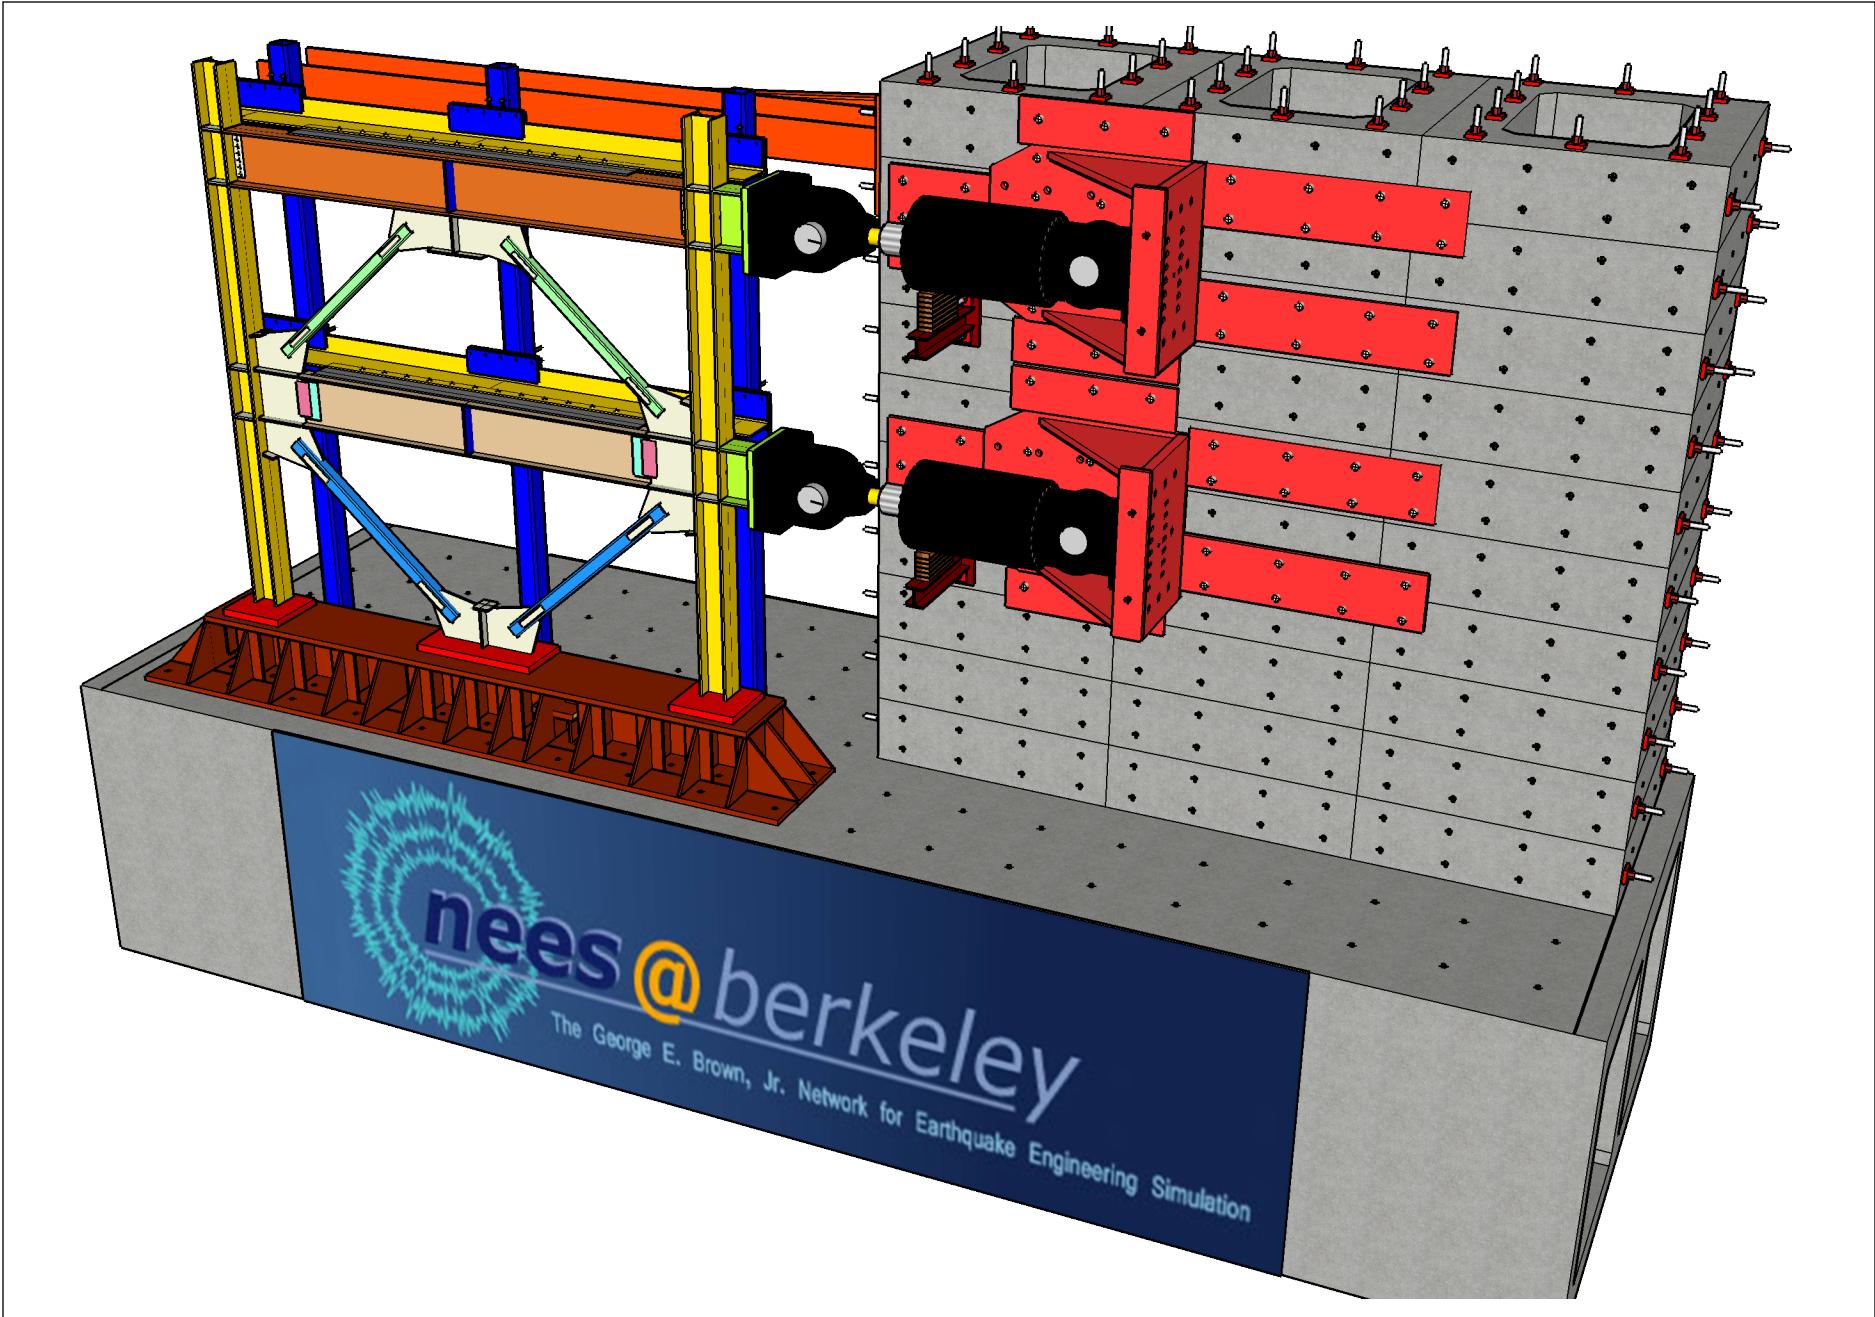

International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame Structures

PEER Report 2013/20

PROJECT
TCBF

PROJECT NO.
TCBF-B-1

DRAWN BY
Jiun-Wei Lai

ISSUE
Aug 01, 2009

TCBF-B-1, Sensor Locations
S.00



International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures


University of California,
Berkeley
TCBF-B-1

PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009
DRAWN BY
J.W. Lai

Sensor
Locations

S.01

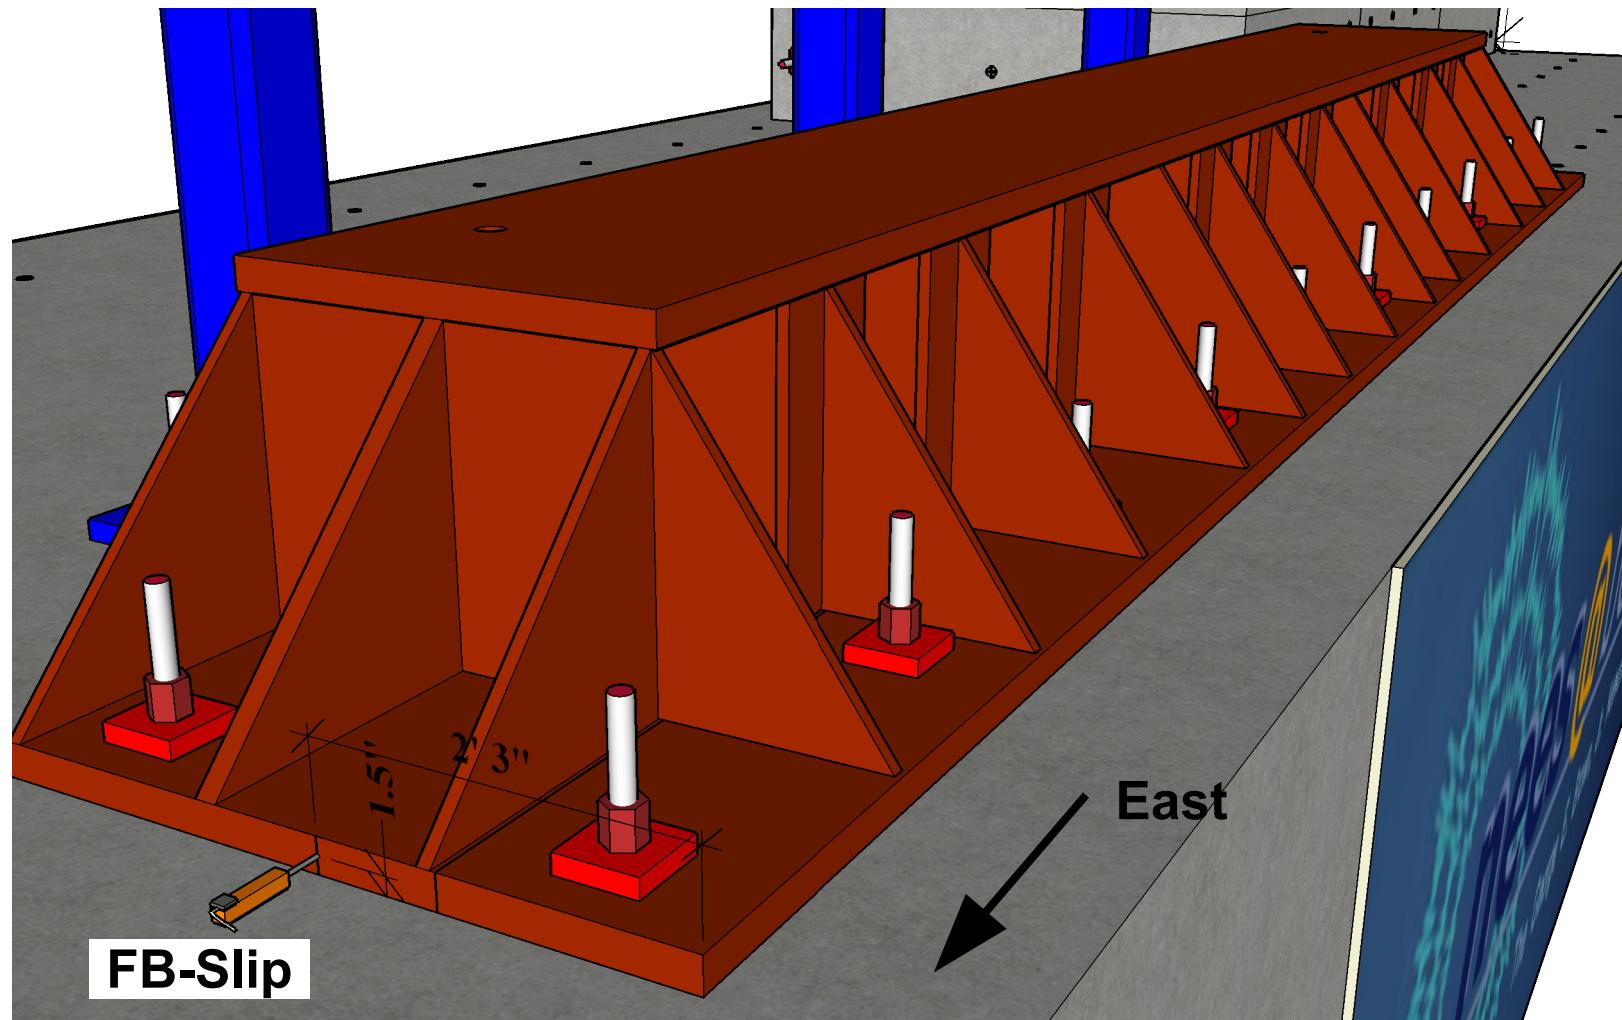

FB-Slip: floor beam slip monitoring (east side, location is shown in the figure)



International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures


University of California,
Berkeley
TCBF-B-1

PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

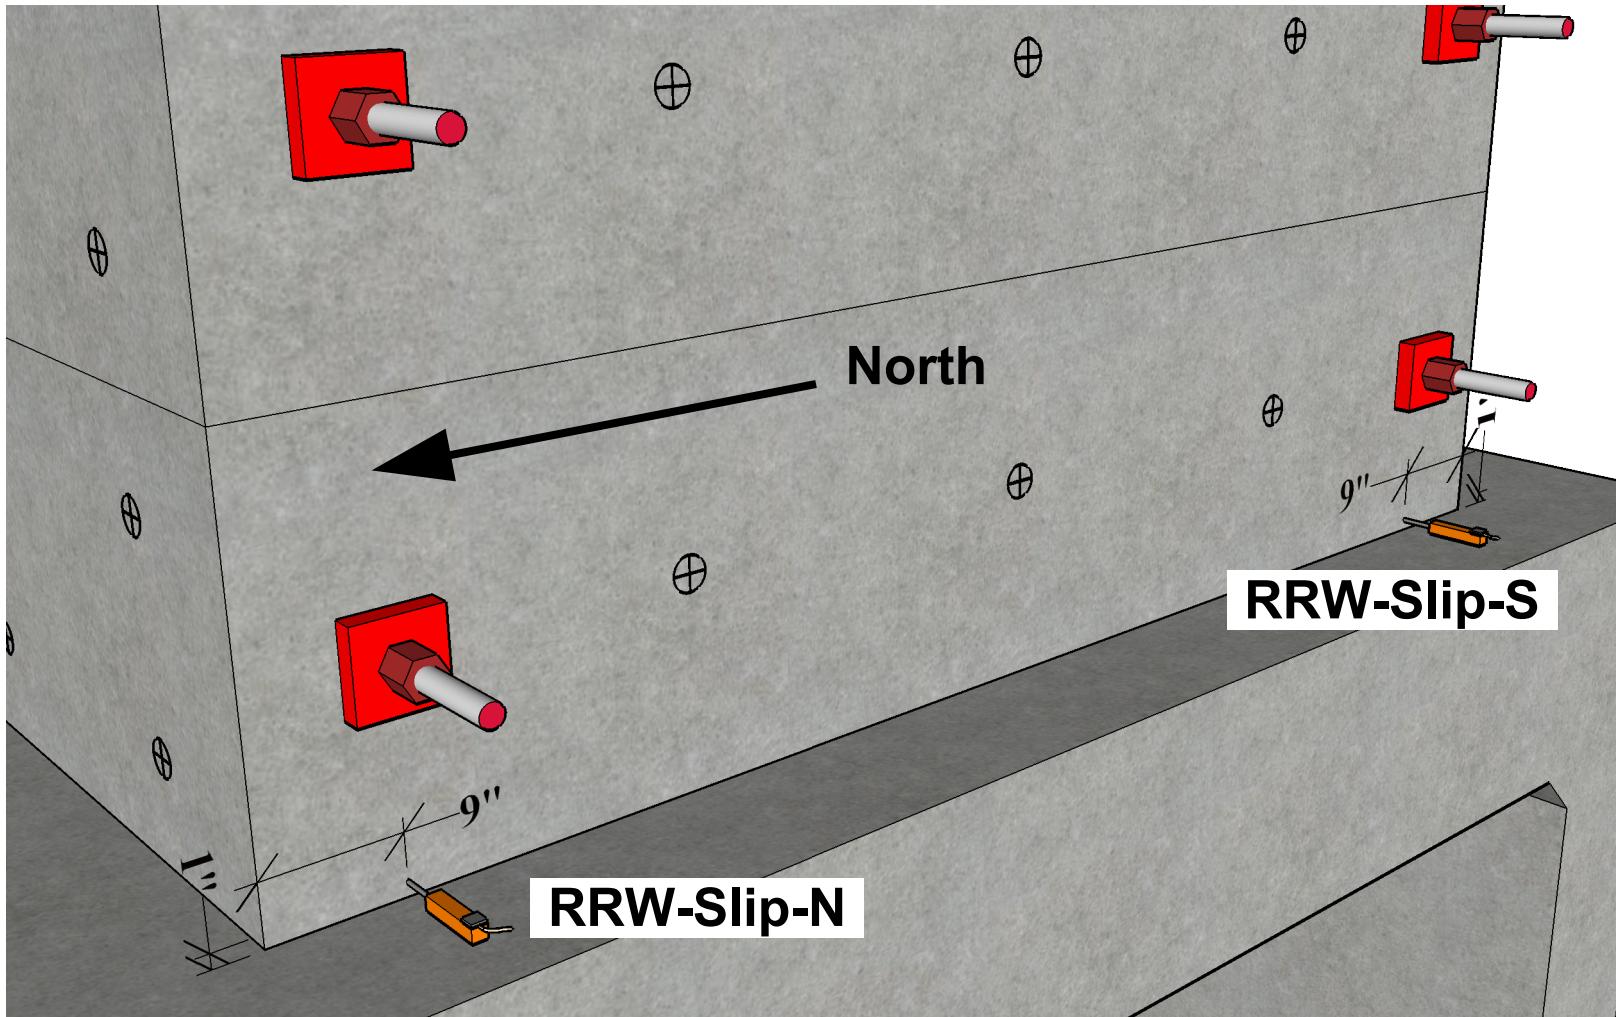

RRW-Slip-N: north side of reconfigurable reaction wall (RRW)
near base, slip monitoring (location is shown in the figure)

RRW-Slip-S: south side of reconfigurable reaction wall (RRW)
near base, slip monitoring (location is shown in the figure)

S.02



International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures


University of California,
Berkeley
TCBF-B-1

PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

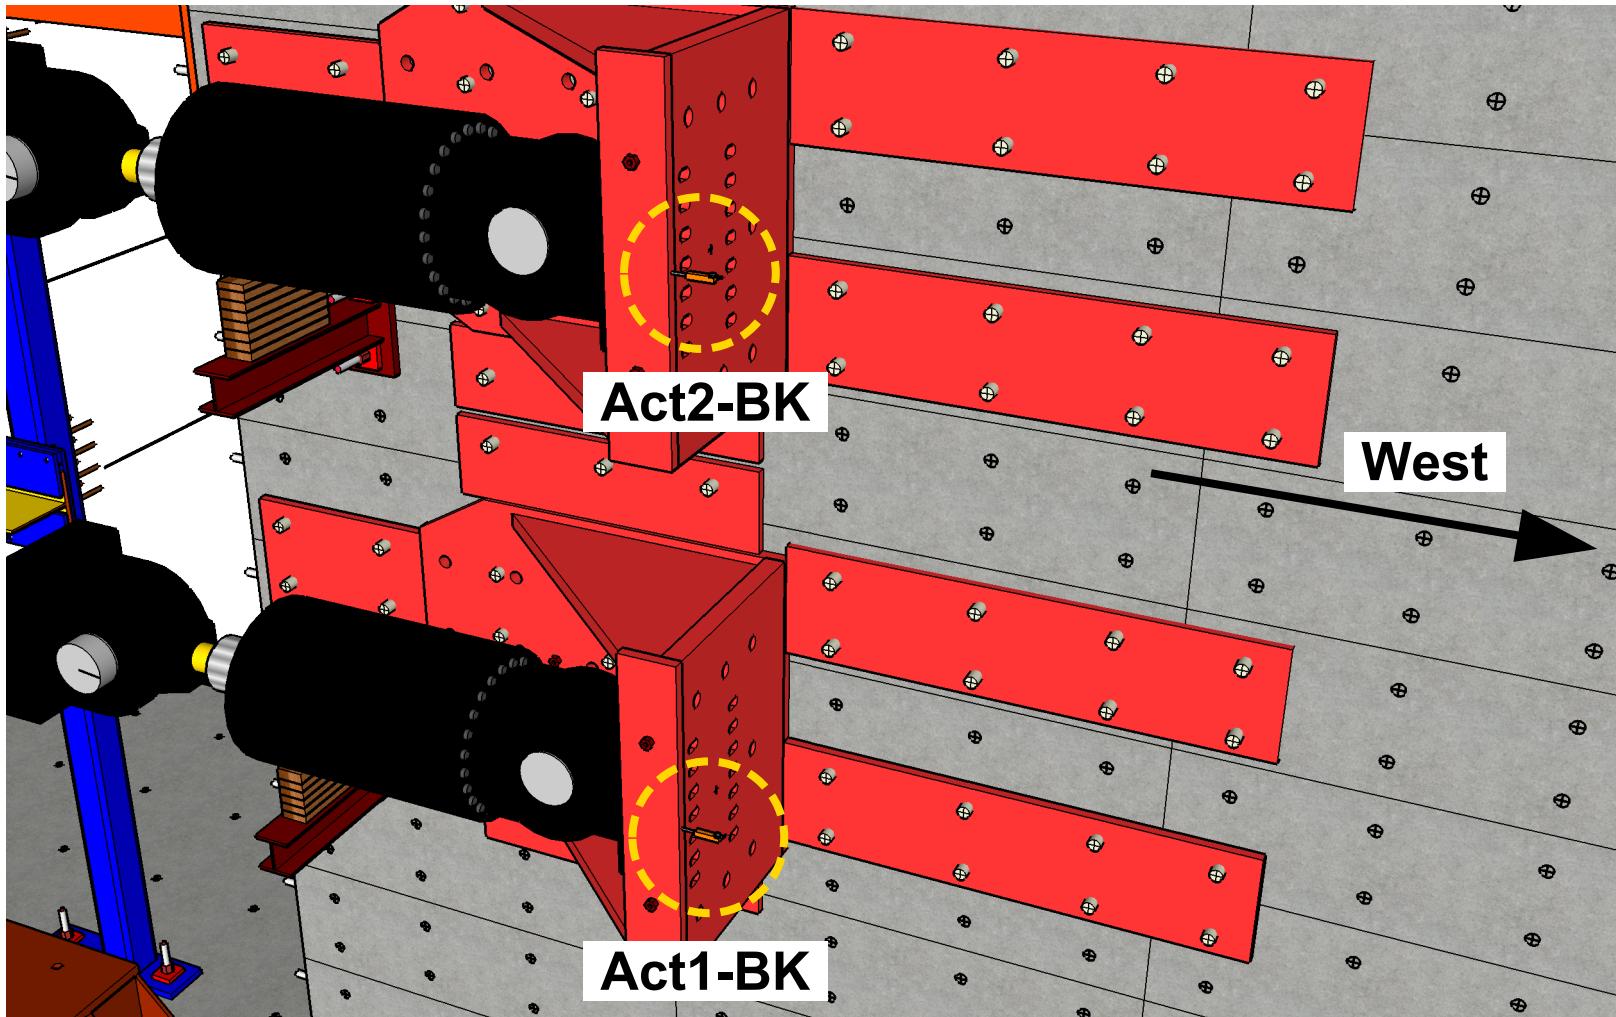

Act1-BK: lower actuator bracket deformation monitoring
(location is shown in the figure)

Act2-BK: upper actuator bracket deformation monitoring
(location is shown in the figure)

S.03



International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1


PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

S.04

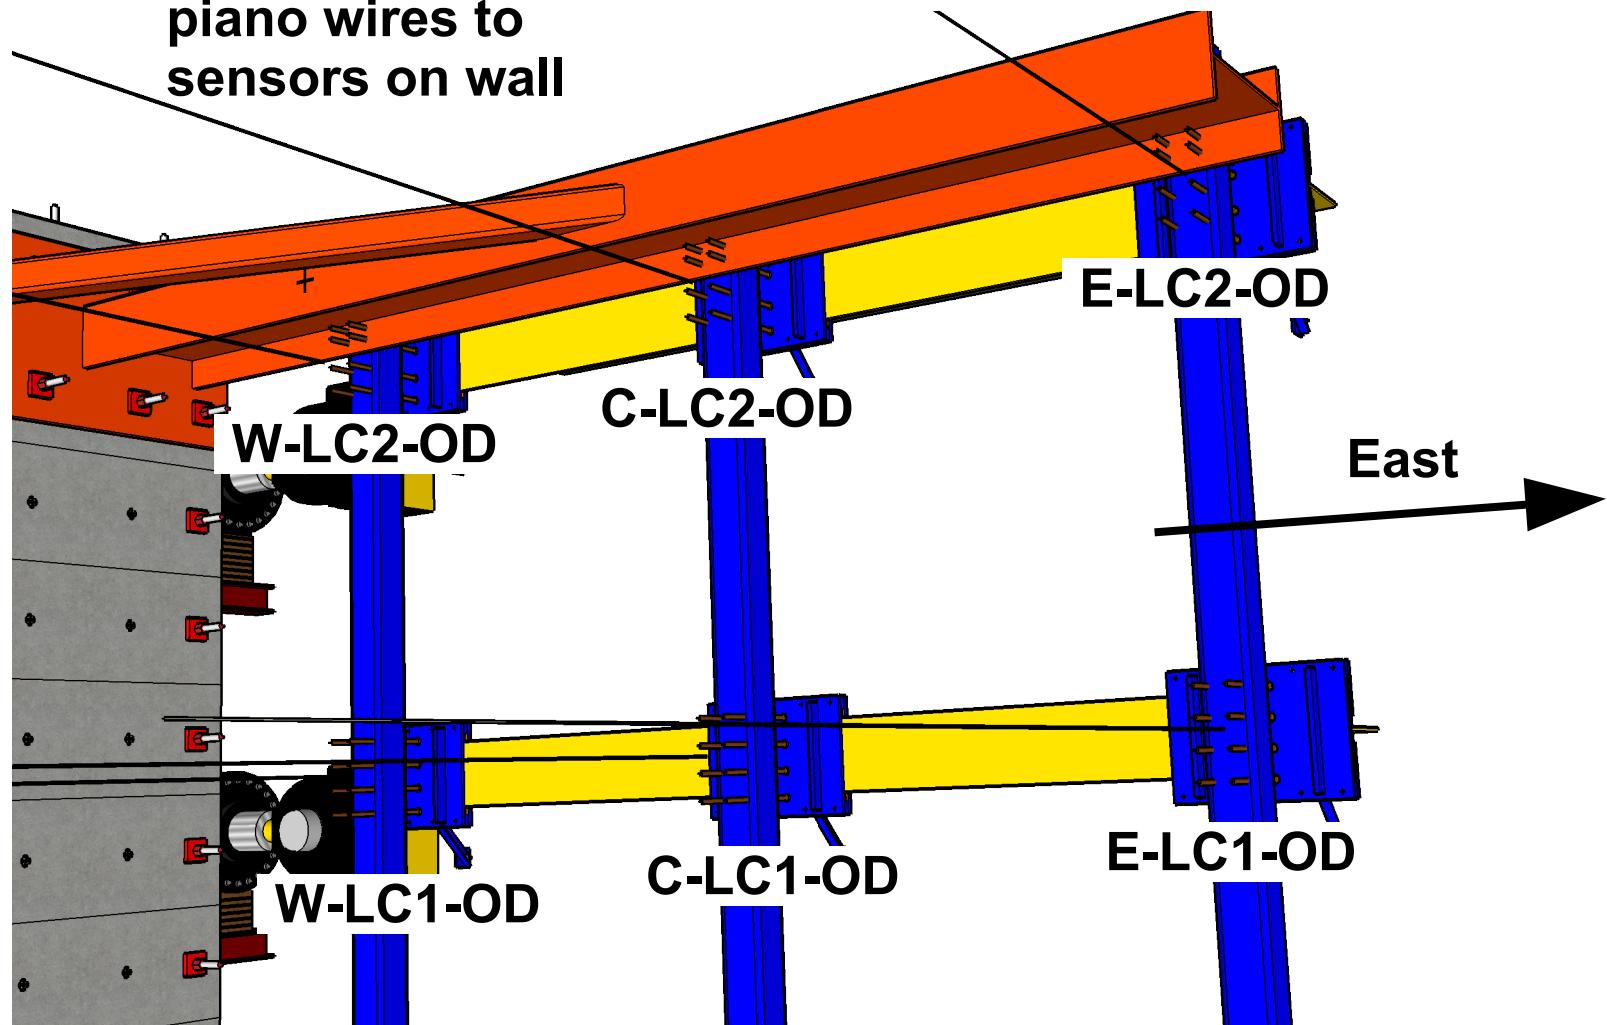

E-LC1-OD (location is shown in the figure)

- Out-of-plane Deformation monitoring
- LC1 or LC2 (1F or 2F HSS columns, lateral)
- E, W or C (east, west or center)



International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures


University of California,
Berkeley
TCBF-B-1

PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

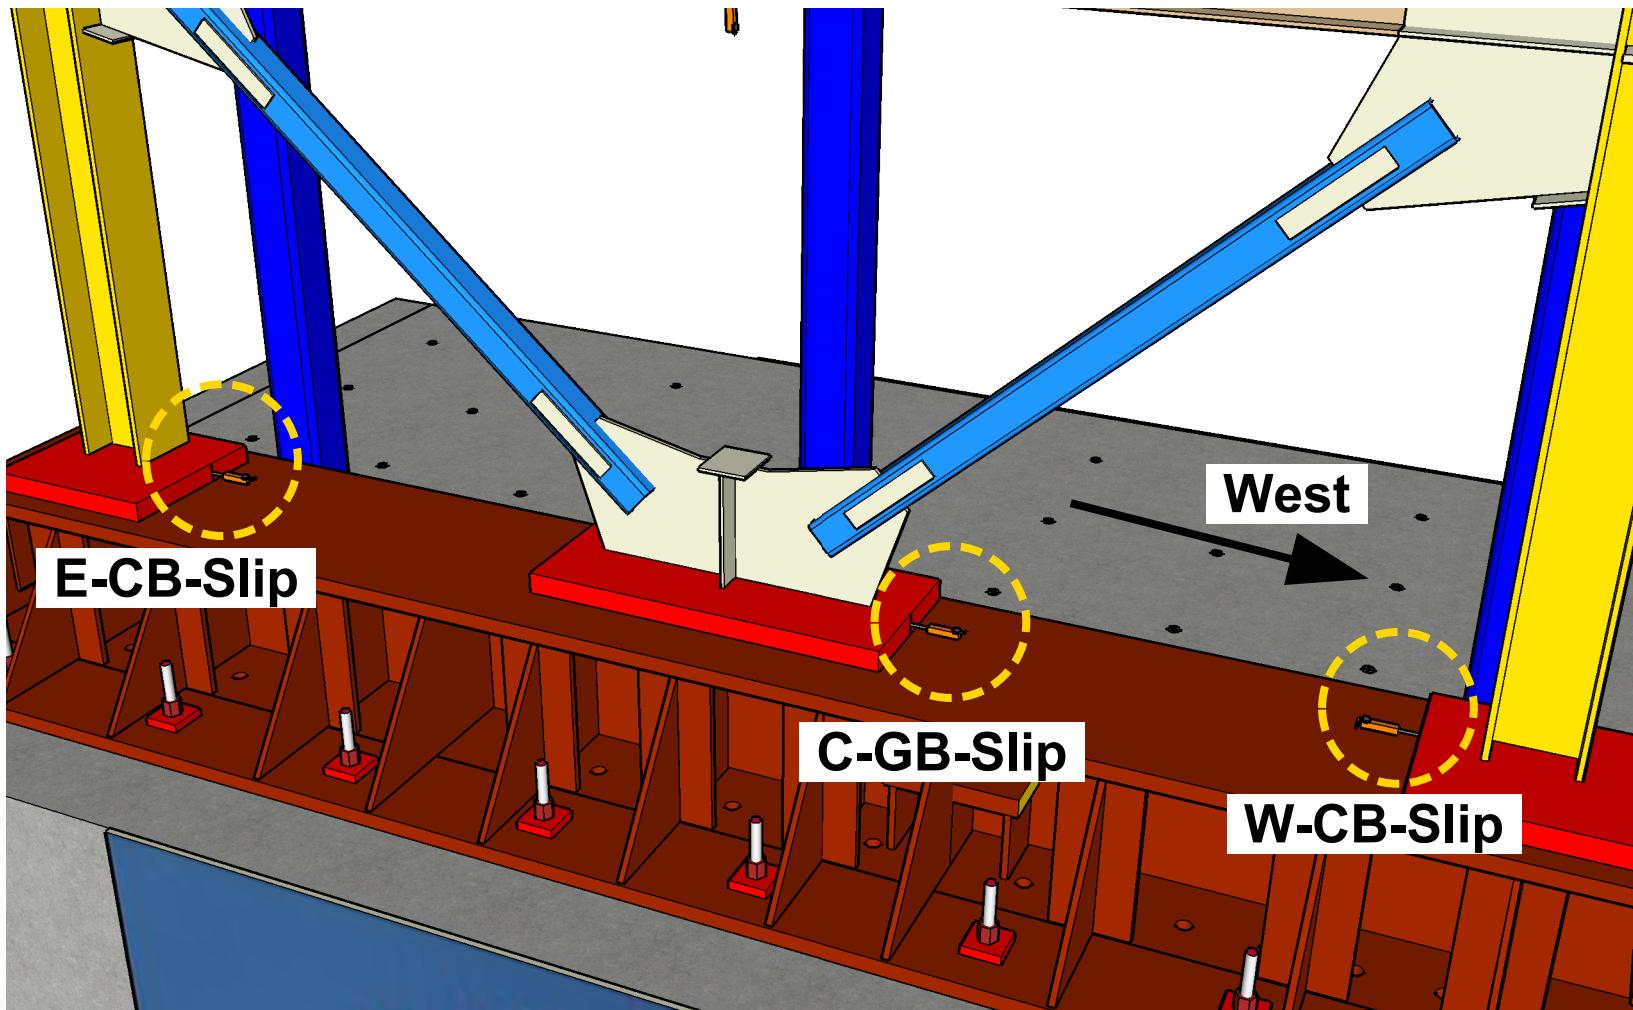

E-CB-Slip: east column base slip monitoring

C-GB-Slip: center gusset plate base slip monitoring

W-CB-Slip: west column base slip monitoring

(locations are shown in the figure, align with the brace frame center plane)

S.05



International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1


PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

S.06

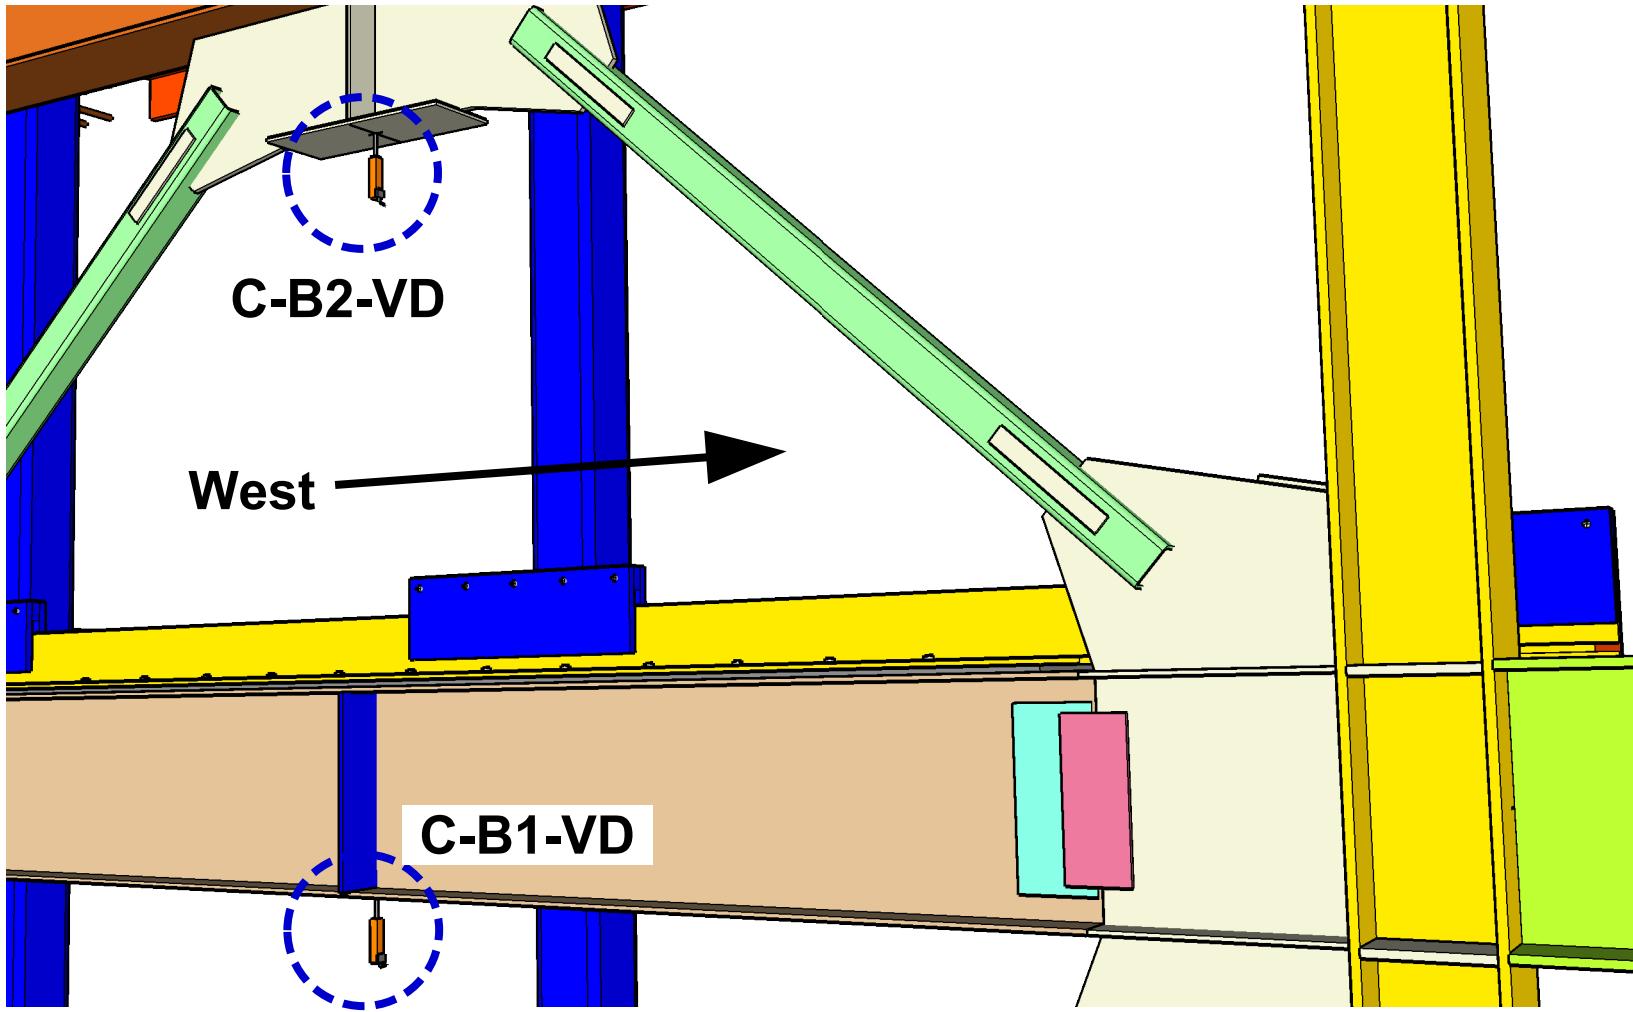

C-B2-VD: roof beam (2F) center deflection monitoring

C-B1-VD: lower beam (1F) center deflection monitoring

(locations are shown in the figure, align with the beam bottom flange center line)




International Hybrid
Simulation of
Tommorow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT
TCFB
PROJECT NO.
TCBF-B-1
ISSUE
Aug 01,
2009
DRAWN BY
J.W. Lai

Sensor
Locations

S.07

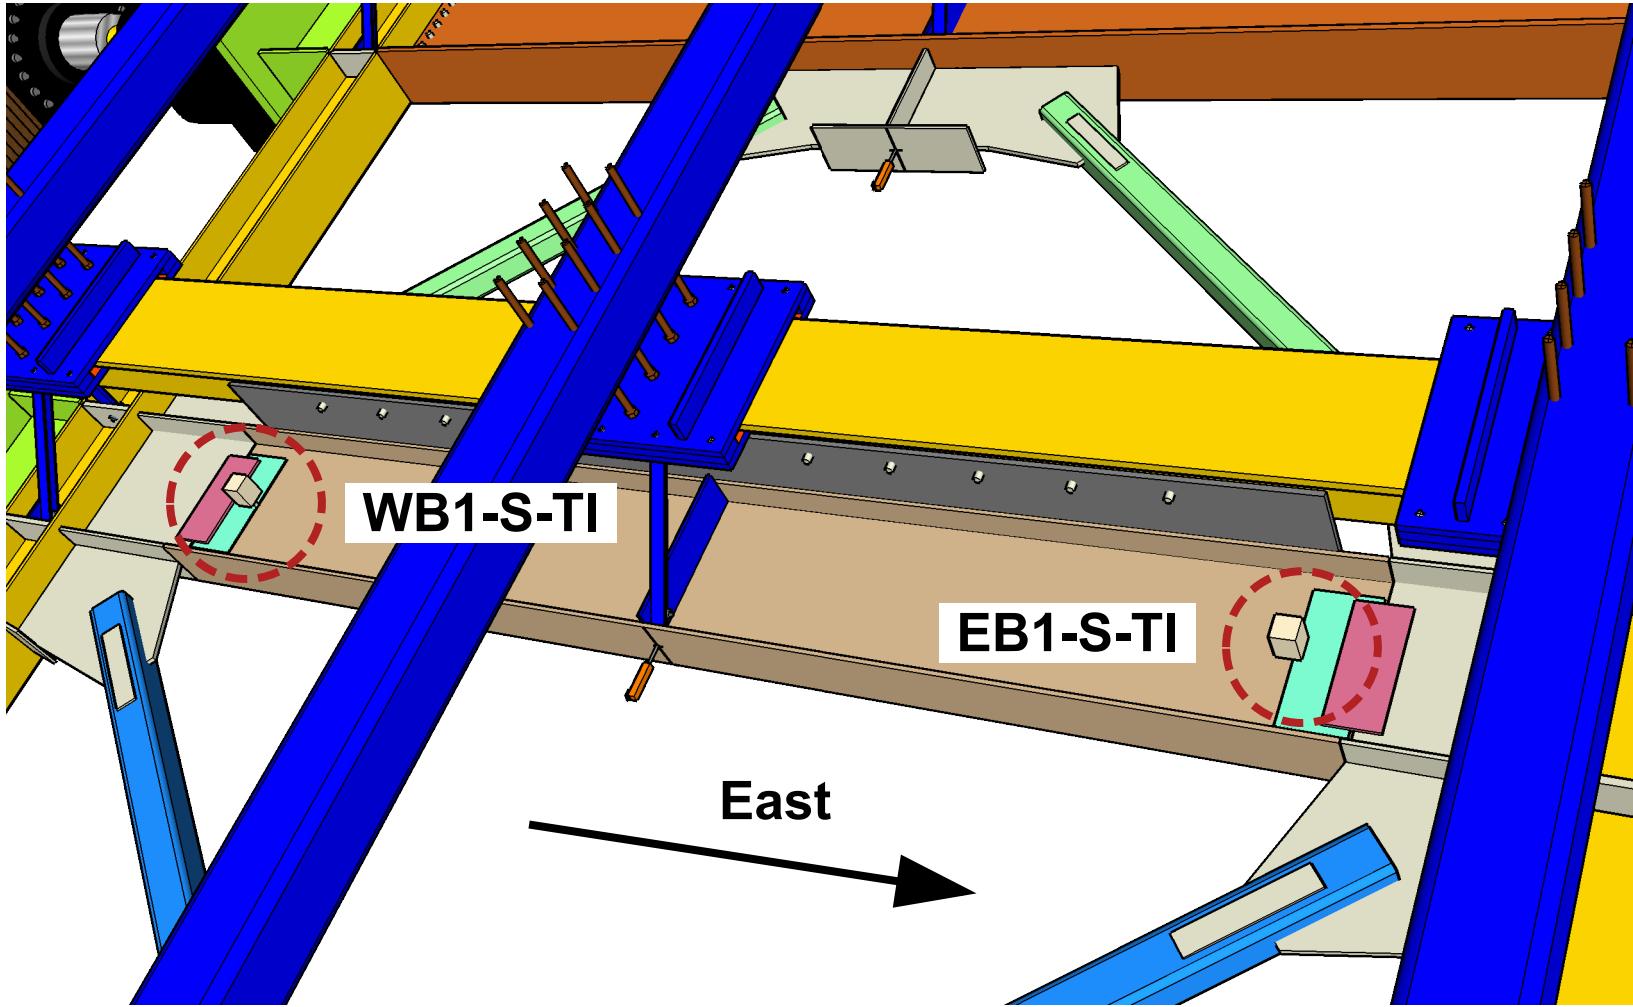

WB1-S-TI: west lower beam (1F) rotation monitoring

EB1-S-TI: east lower beam (1F) rotation monitoring

(locations are shown in the figure, align with the beam web center line)




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCBF
TCBF-B-1
DRAWN BY
J.W. Lai
ISSUE
Aug 01,
2009

Sensor
Locations

S.08

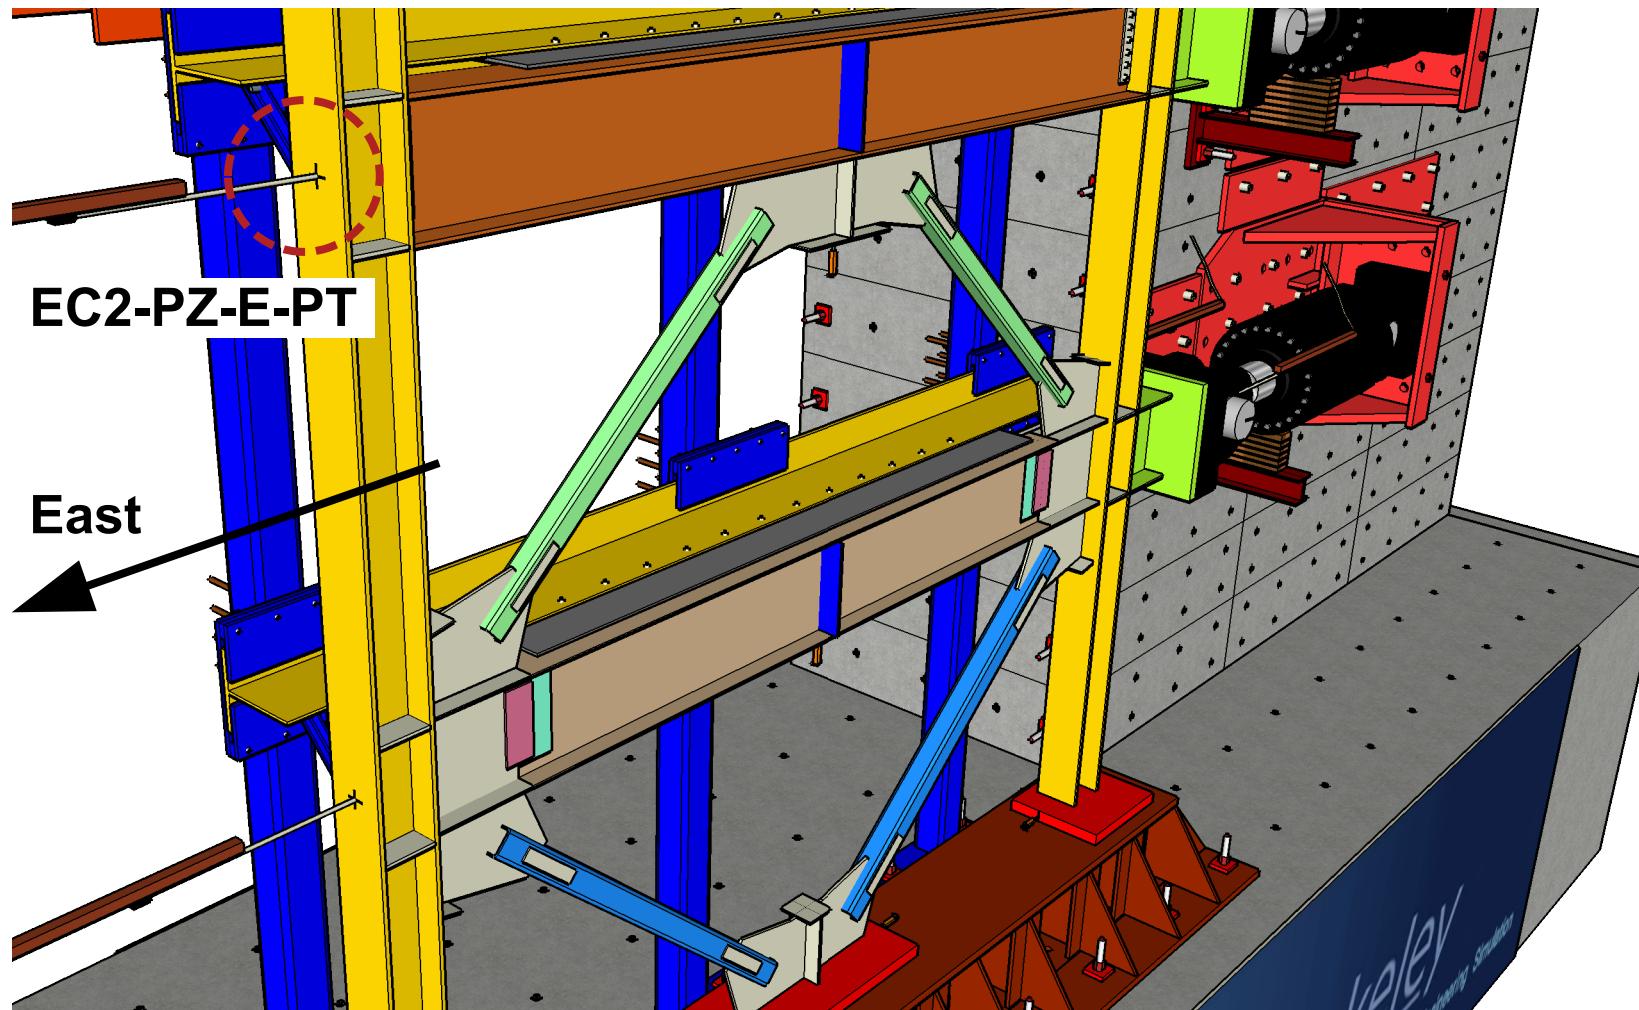

EC2-PZ-E-PT: roof level (2F) displacement monitoring

(locations are shown in the figure, align with the beam center line at each level)



International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1


PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

S.09

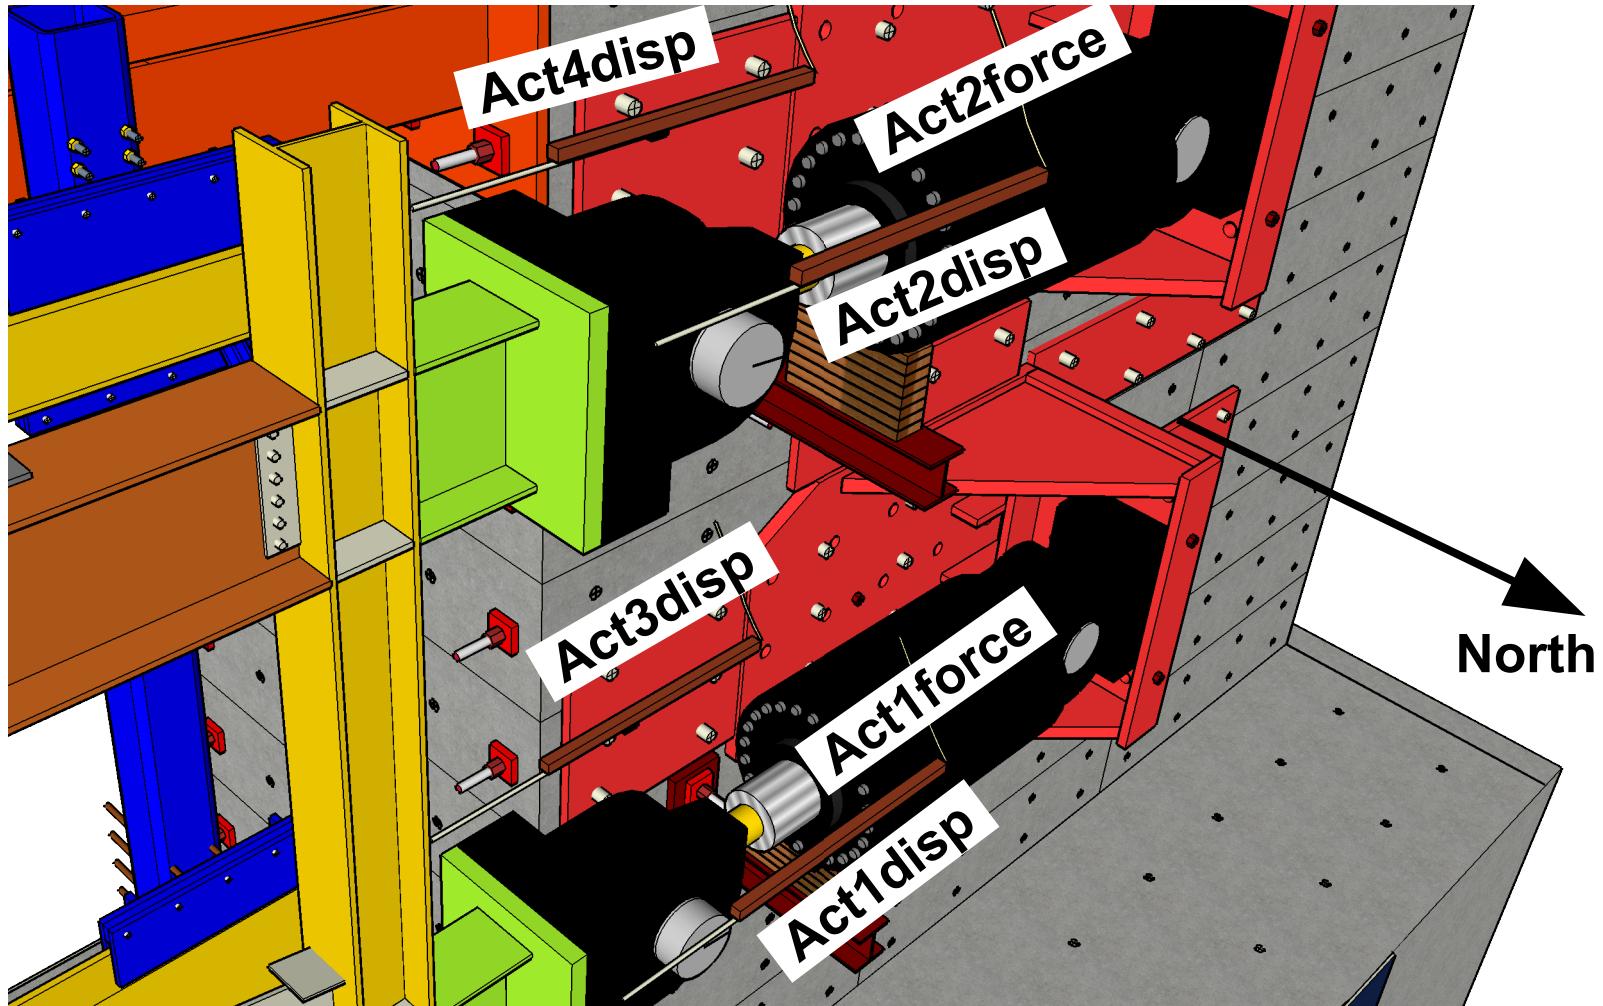

Act2disp, Act4sidp : roof level displacement monitoring (north & south side)

Act1disp, Act3disp: lower level displacement monitoring (north & south side)

Act1force, Act2force: lower & roof level load cell (locations are shown in the figure)




International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCFB
DRAWN BY
J.W. Lai
ISSUE
Aug 01,
2009

Sensor
Locations

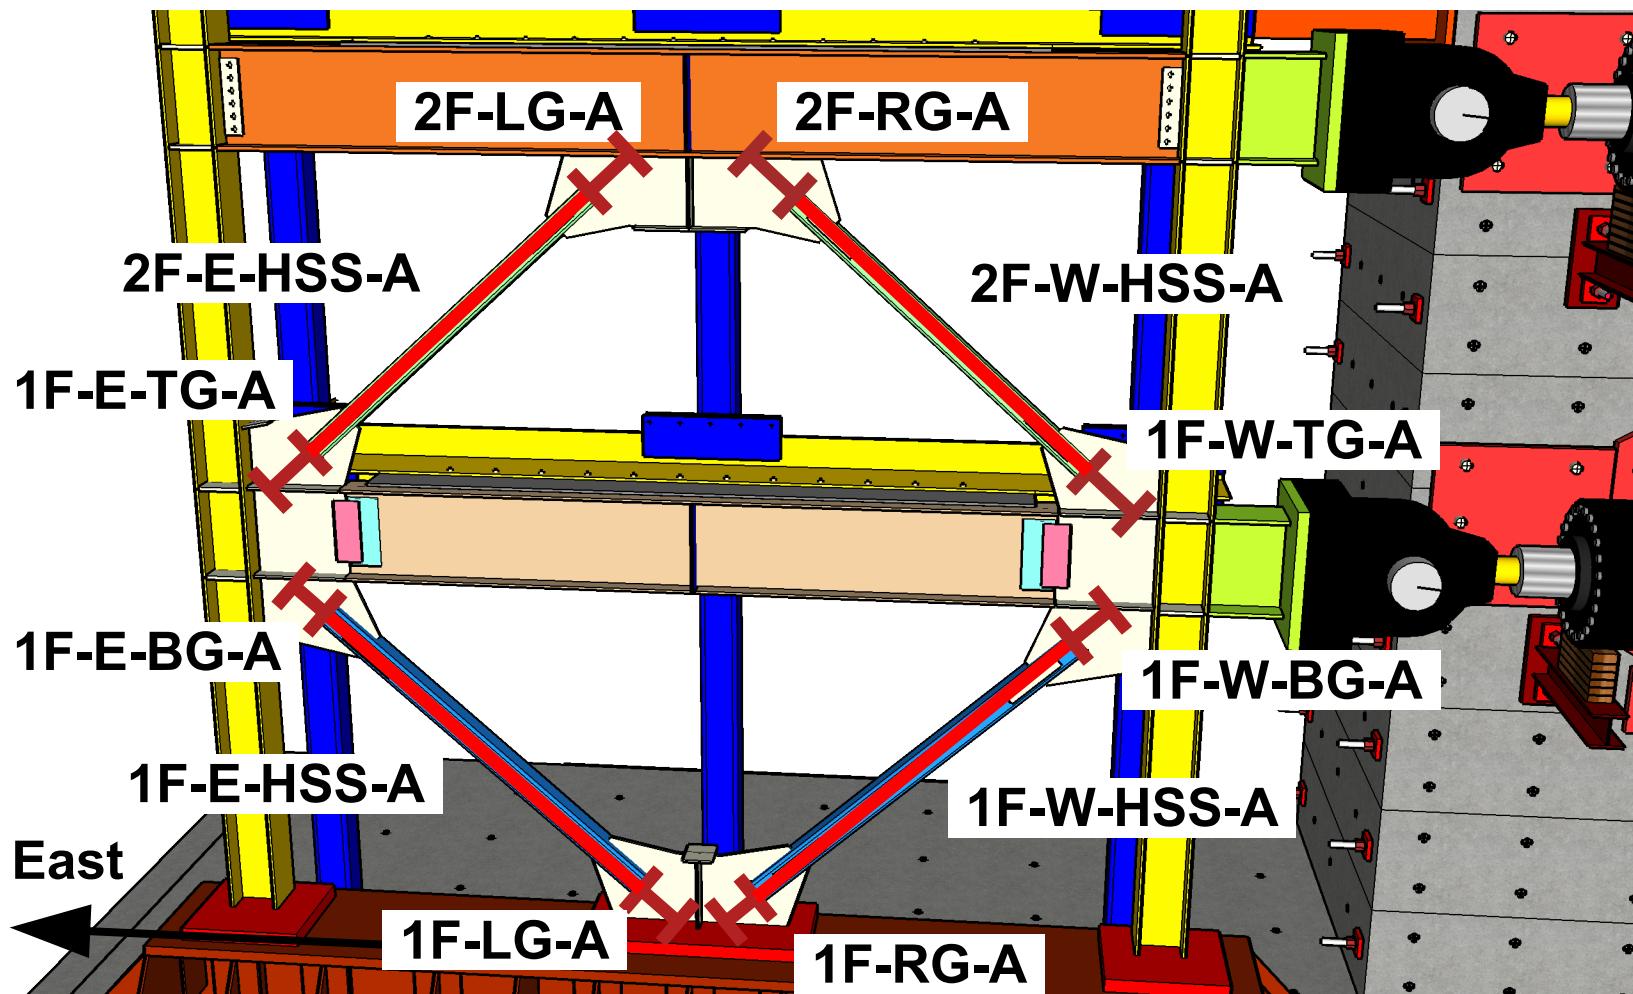

LG: left gusset plate region; RG: right gusset plate region

TG: top gusset plate region; BG: bottom gusset plate region

E: east side; W: west side; A: axial

brace axial deformation monitoring along the axis of brace
(wire pot locations are shown in the figure)

S.10




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCBF
DRAWN BY
J.W. Lai

Sensor
Locations

S.11

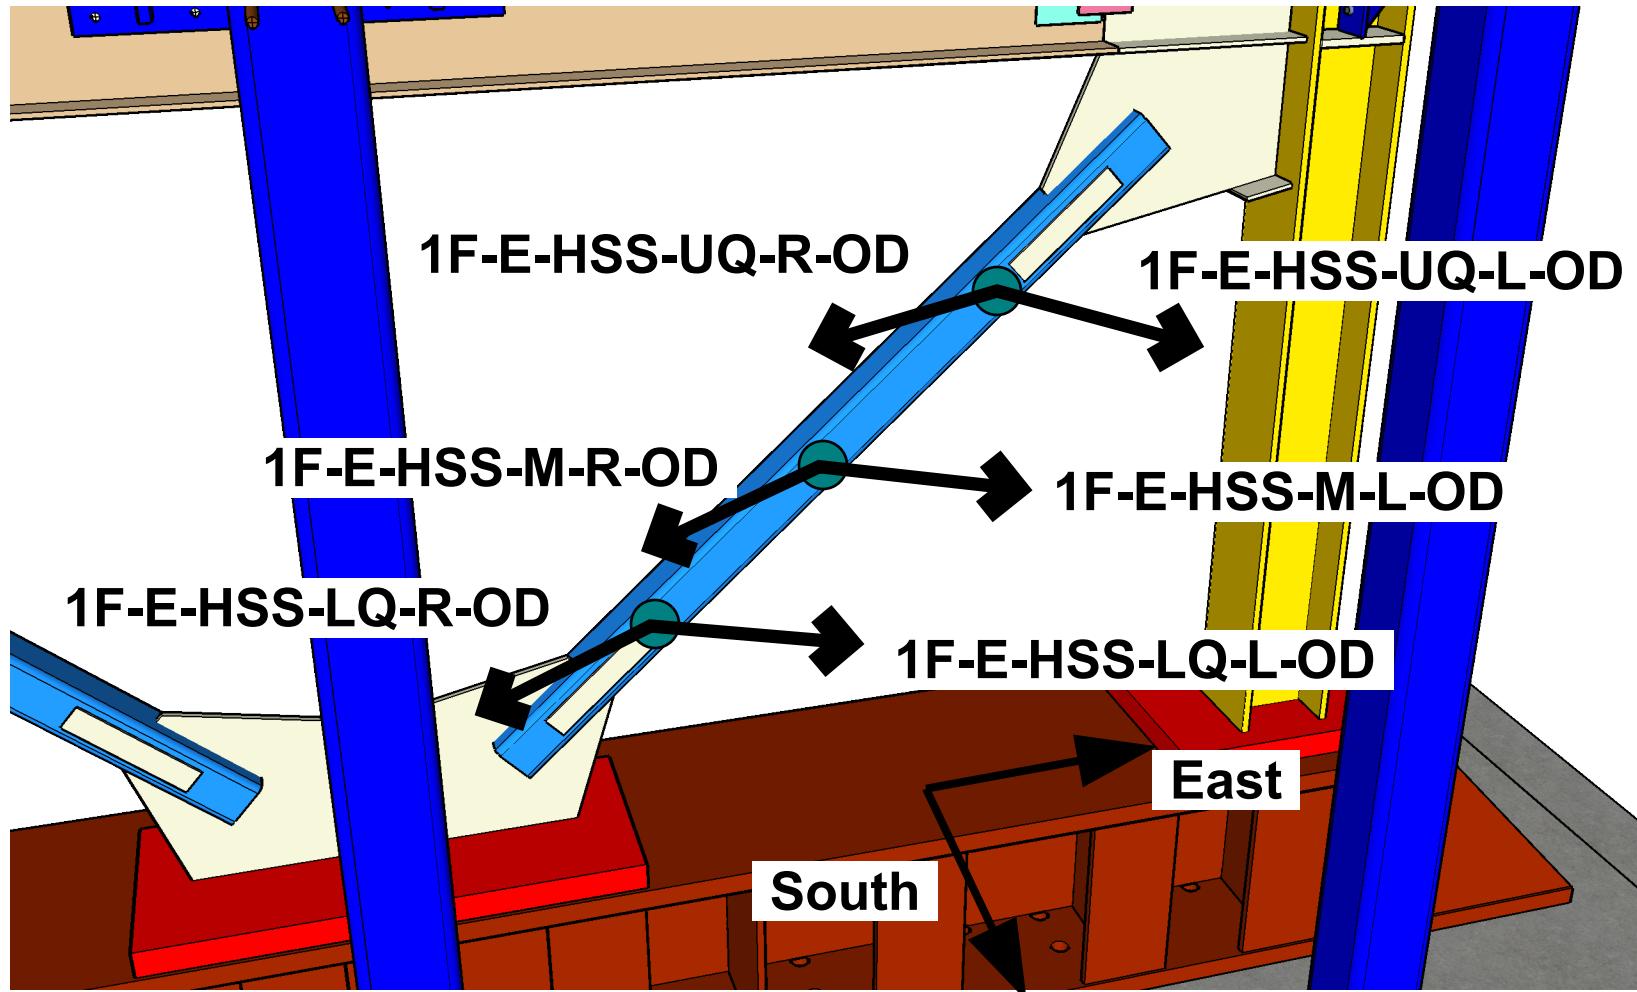

Typical brace out-of-plane deformation monitoring (wire pot directions are shown in the figure for one brace, other braces are similar, six wire pots per brace)

1F-E-HSS-UQ-R-OD

- lefthand (L) or righthand (R) side when facing to south
- upper quarter (UQ), middle (M) or lower quarter point (LQ)
- east side brace (E-HSS) or west side brace (W-HSS)
- first story (1F) or second story brace (2F)




International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCFB
TCBF-B-1
ISSUE
Aug 01,
2009
DRAWN BY
J.W. Lai

Sensor
Locations

S.12

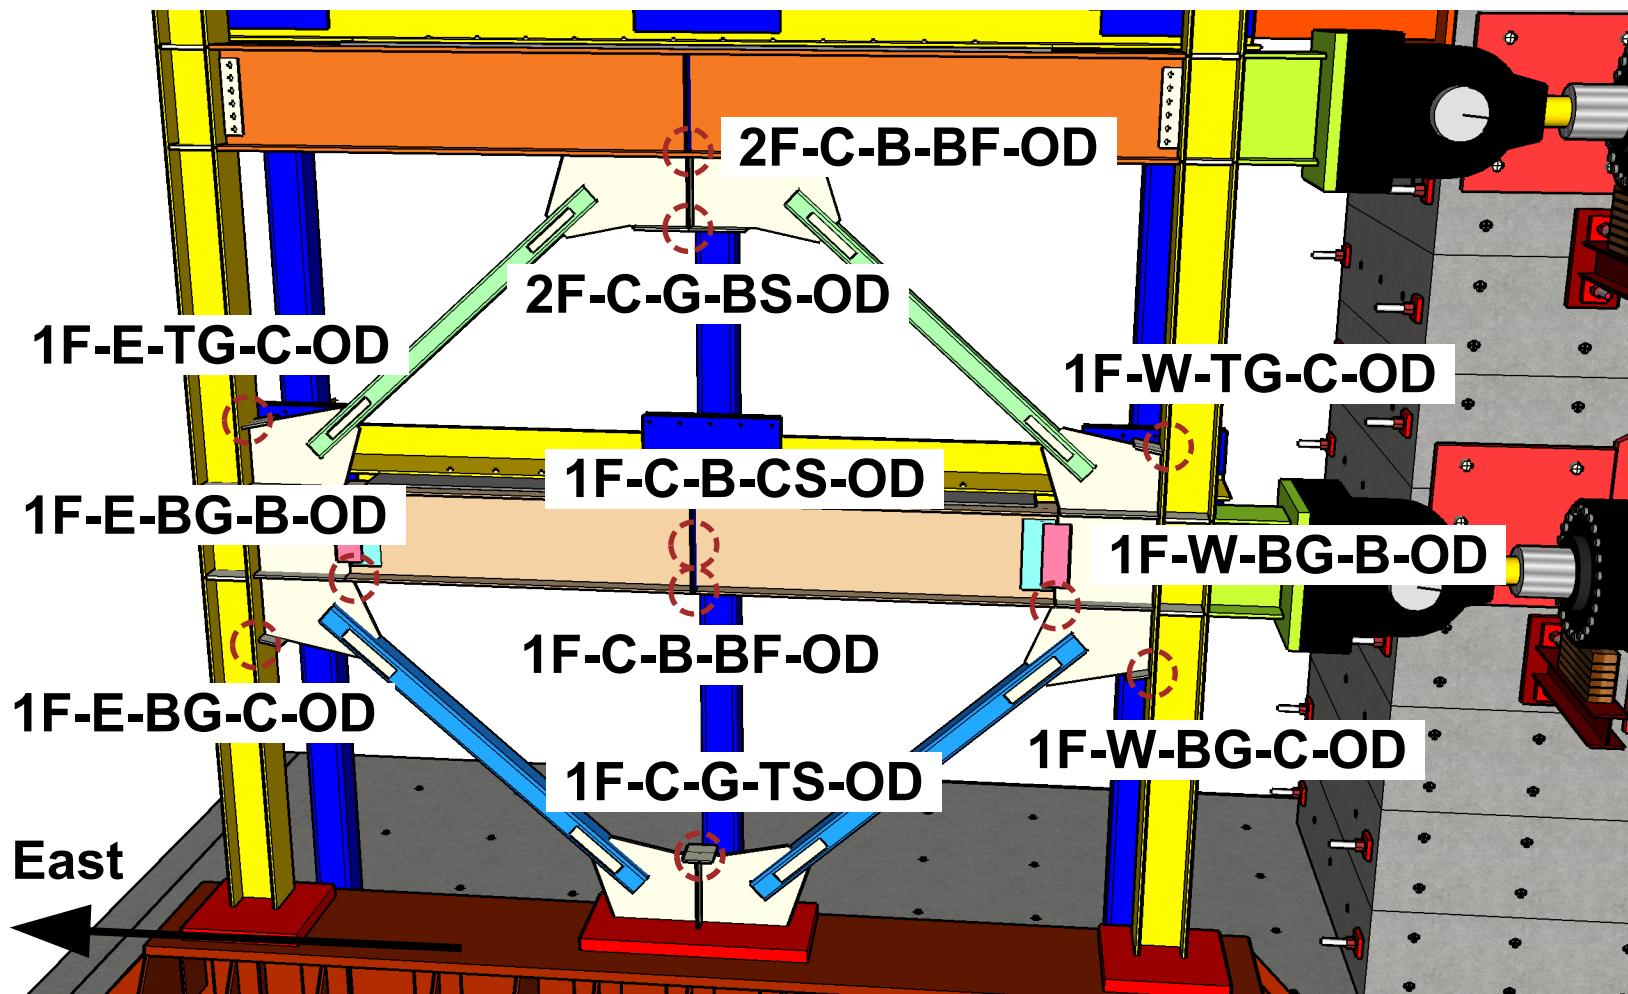

C: column side corner; B: beam side corner
C-B: beam center point; BF: bottom flange corner
BS, CS: bottom stiffener corner, center stiffener corner
TG: top gusset plate region; BG: bottom gusset plate region
E: east side; W: west side; A: axial; 1F, 2F: 1st & 2nd story
(wire pot target locations are shown in the figure)



International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures


University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCBF
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor Locations

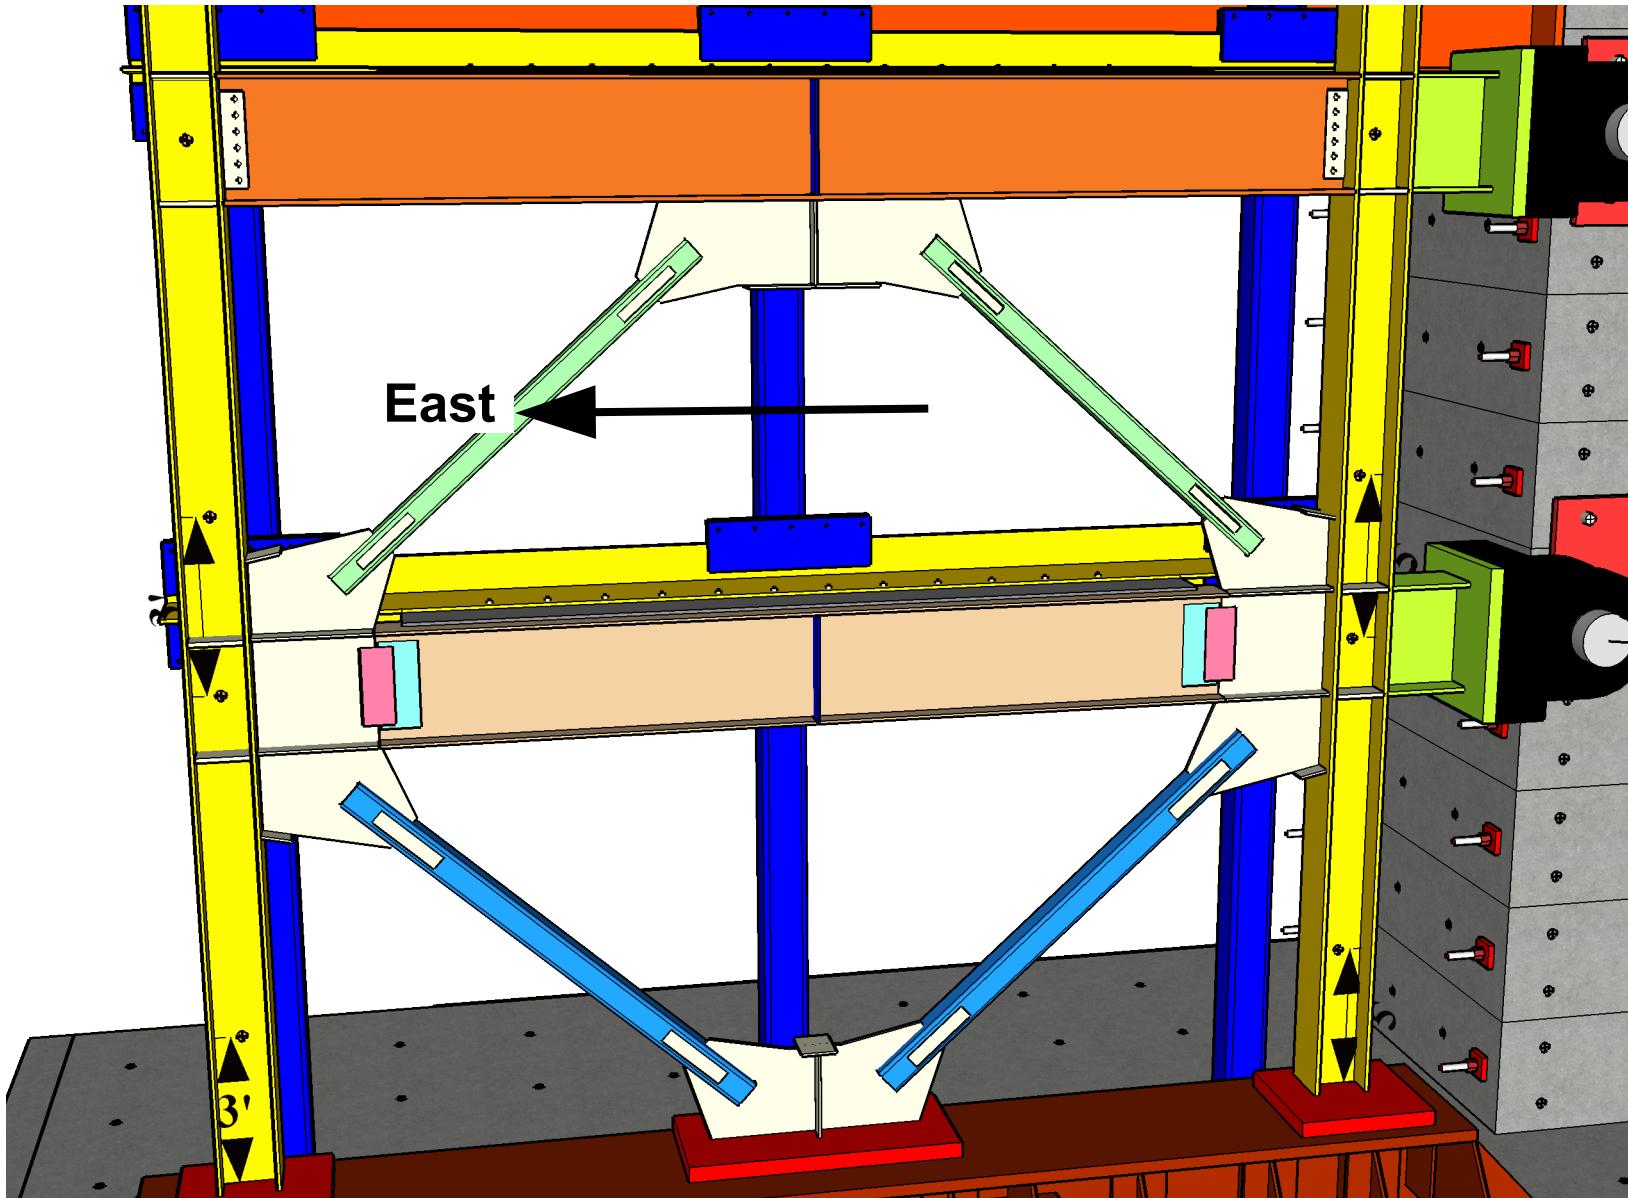

Overview of eight rosette locations on the specimen (only the column and panel zone regions). Details and key labels are shown in the next page.




International Hybrid
Simulation of
Tomomoto's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCBF
DRAWN BY
J.W. Lai

Sensor
Locations

S.14

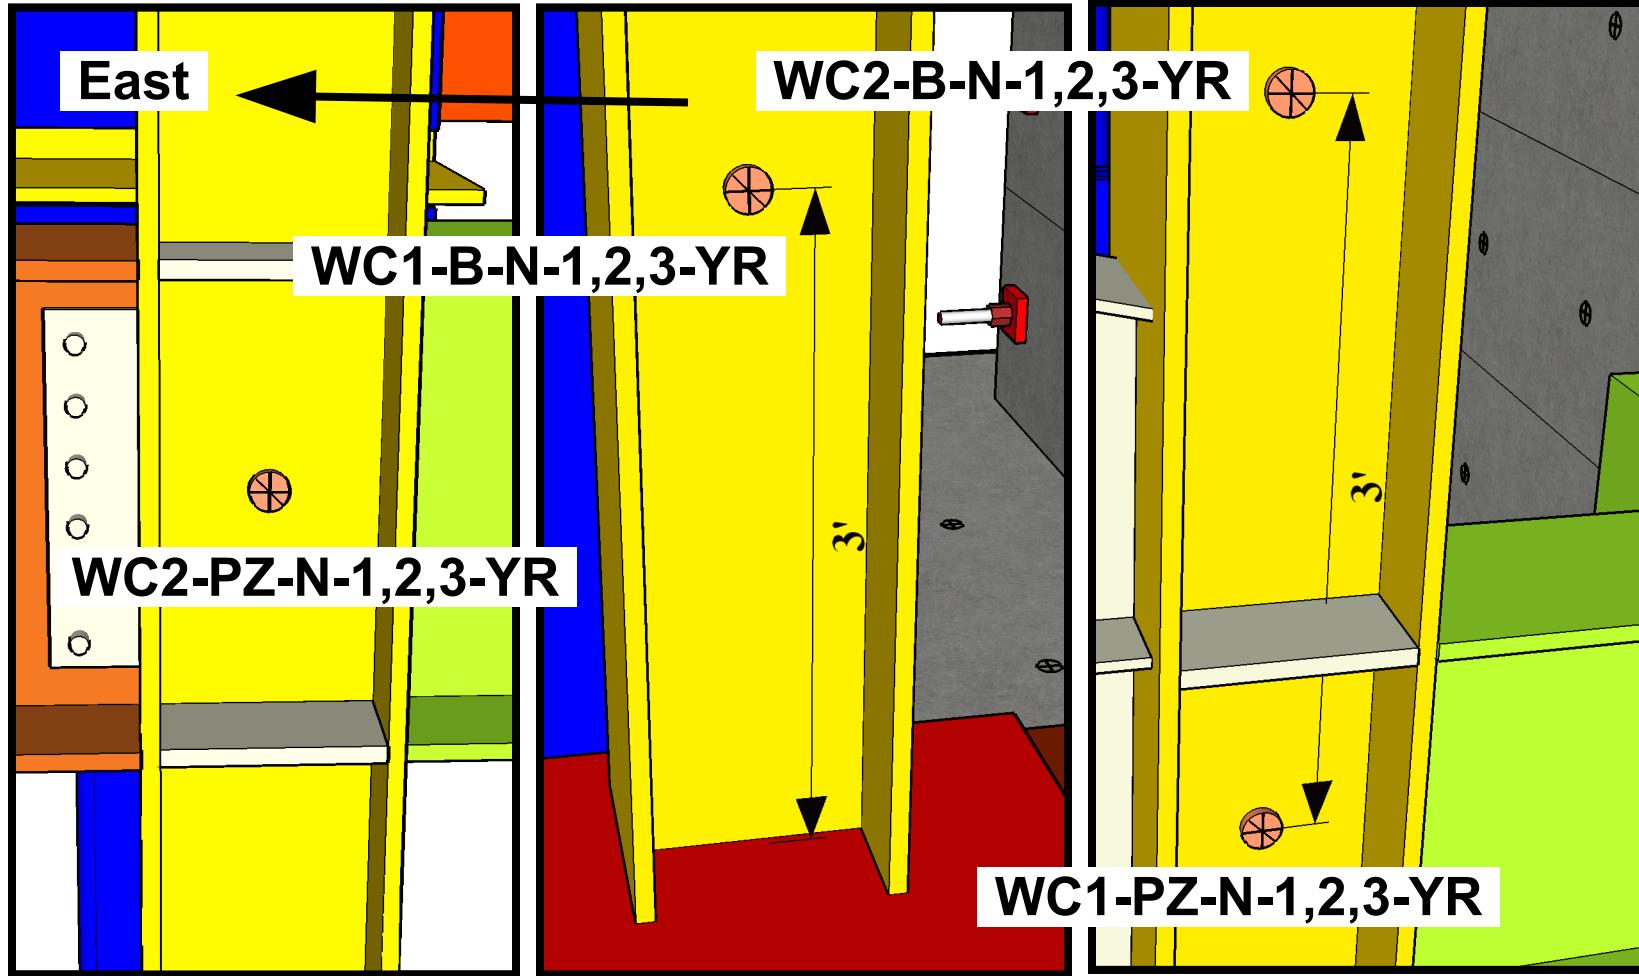

WC1-B-N-1,2,3-YR


YR = rosette with larger measurement range

1 = 0 degree; 2 = 90 degree; 3 = 135 degree

N = glued at north side

B = bottom side of column; PZ = panel zone center

WC = west column; EC = east column; 1 = 1F; 2 = 2F



(rosette locations on the west column are shown in the figure,
align with the column center, east column similar)




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

ISSUE Aug 01, 2009
PROJECT TCFB
PROJECT NO. TCBF-B-1
DRAWN BY J.W. Lai

Sensor
Locations

S.15

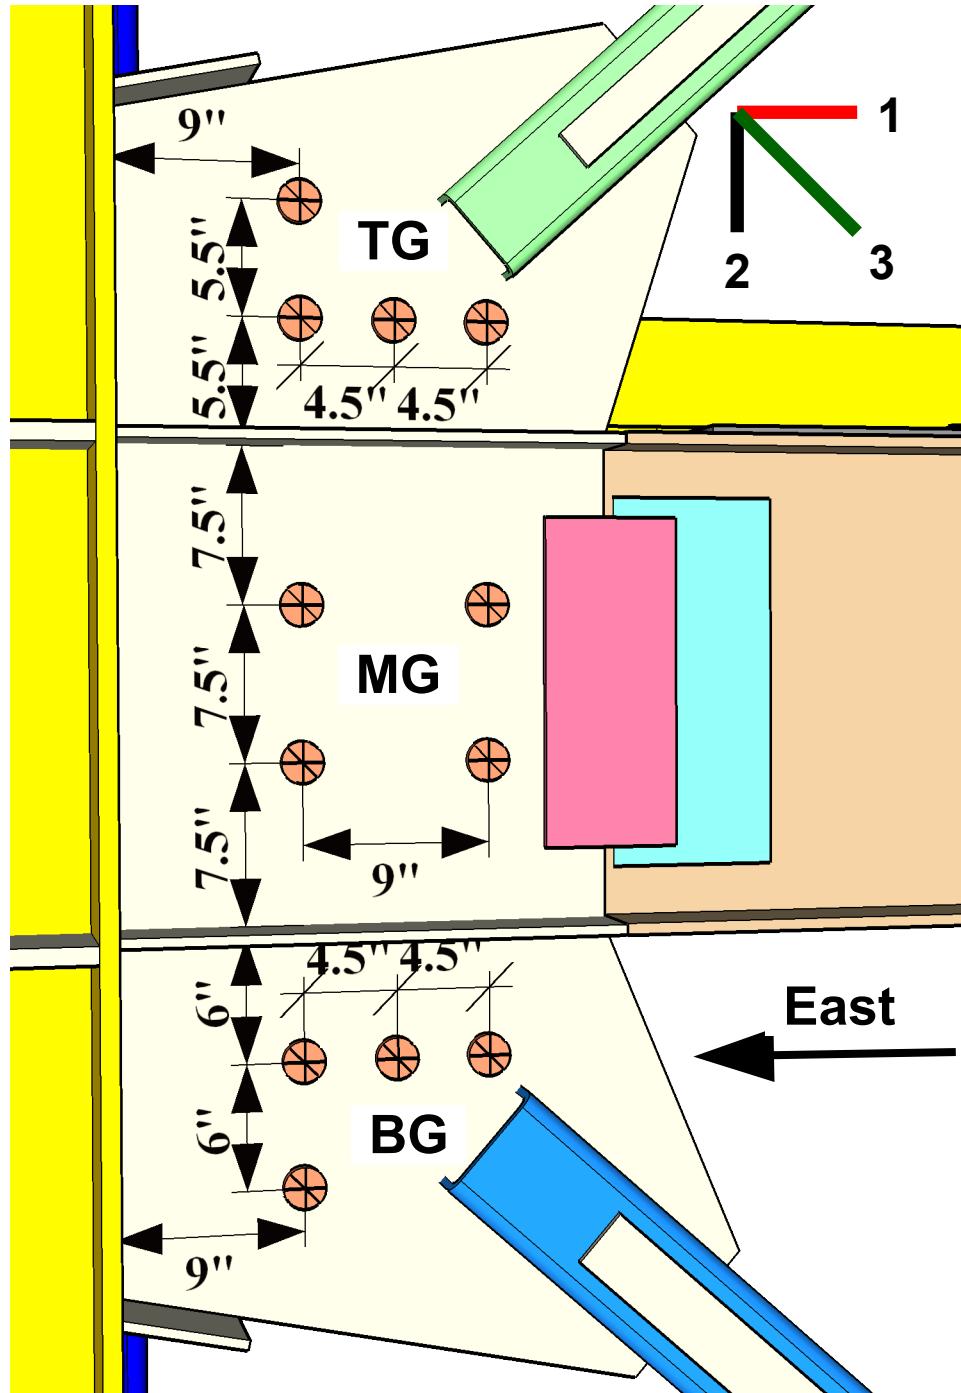

1F-E-TG-TL-1,2,3-N-YR

1F-E = east gusset plate

TG = top region

MG = middle region

BG = bottom region

TL = top left side

BL = bottom left side

TR = top right side

BR = bottom right side

TC = top center

BC = bottom center

1 = 0 degree (direction)

2 = 90 degree

3 = 135 degree

N = glued on north side

**YR = rosette with larger
measurement range**

**(twelve rosette locations
on the one-piece gusset
plate, key labels are
shown above)**




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

ISSUE Aug 01, 2009
PROJECT TCFB
PROJECT NO. TCBF-B-1
DRAWN BY J.W. Lai

Sensor
Locations

S.16

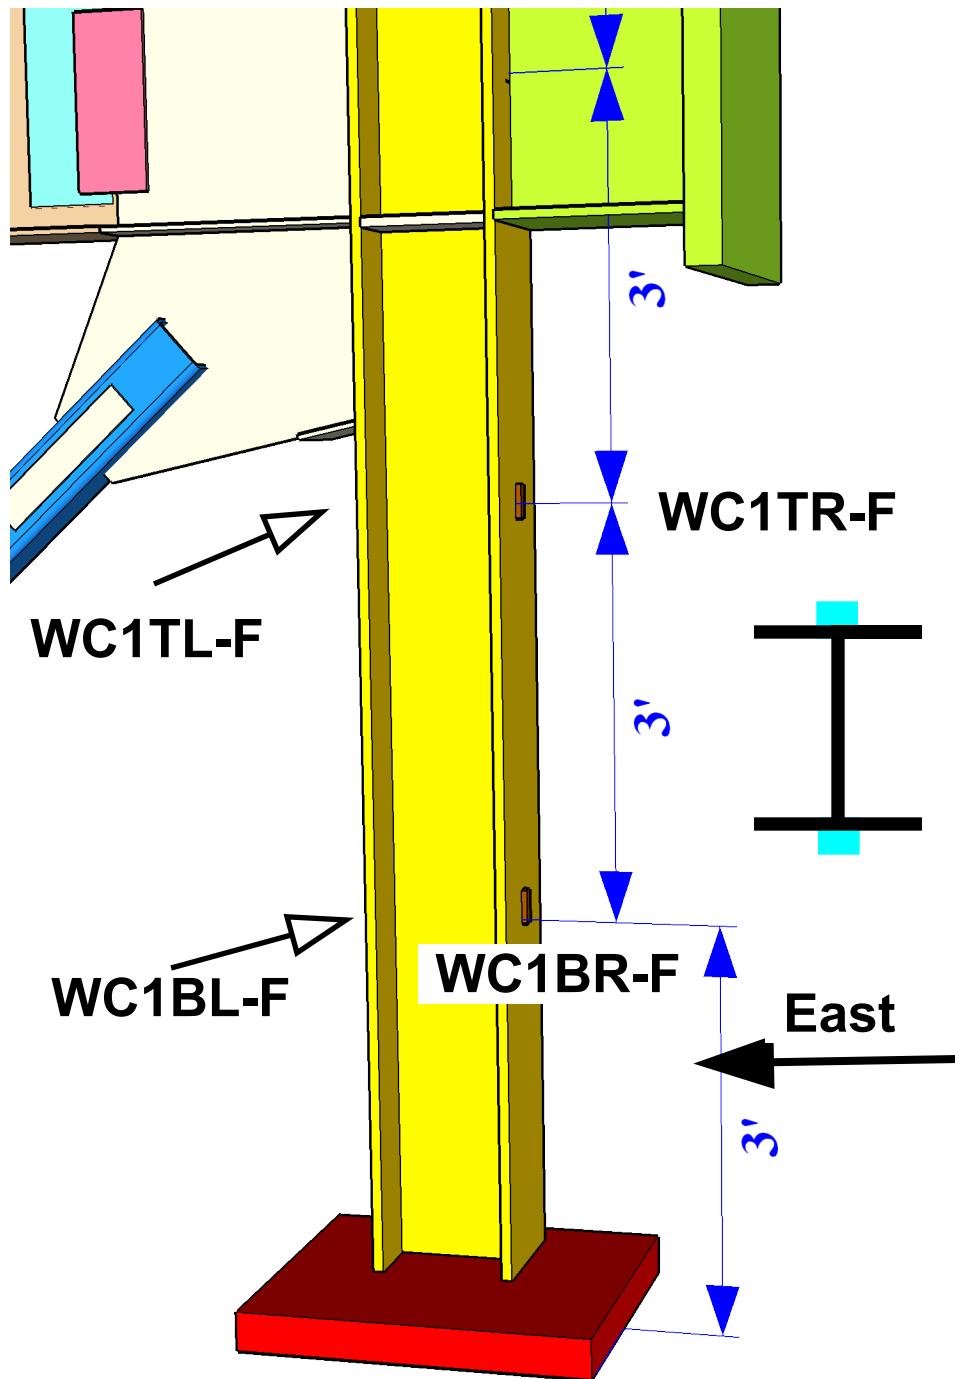

**WC1TR-F ...
EC1BL-F ...**

**WC = west column
EC = east column
TL = top left side
BL = bottom left side
TR = top right side
BR = bottom right side
1 = first story
2 = second story
F = FLA strain gauge**

**(total sixteen strain
gauge locations on the
columns, key labels are
shown above, align with
the column flange
centerline; east column
similar)**




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

ISSUE Aug 01, 2009
PROJECT TCFB
PROJECT NO. TCBF-B-1
DRAWN BY J.W. Lai

Sensor
Locations

S.17

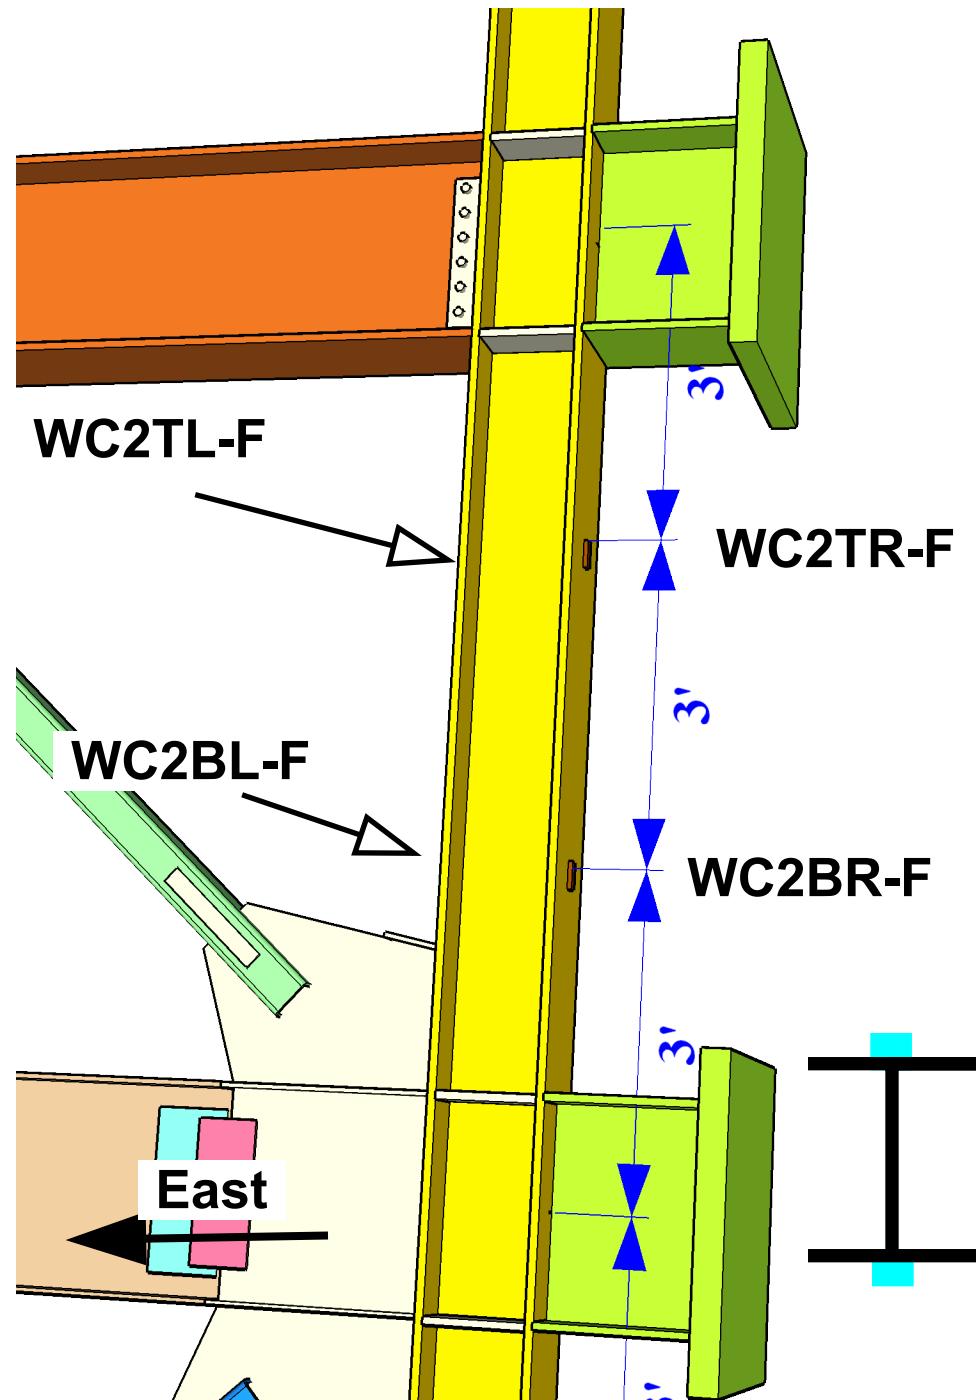

**WC2TR-F ...
EC2BL-F ...**

**WC = west column
EC = east column
TL = top left side
BL = bottom left side
TR = top right side
BR = bottom right side
1 = first story
2 = second story
F = FLA strain gauge**

**(total sixteen strain
gauge locations on the
columns, key labels are
shown above, align with
the column flange
centerline; east column
similar)**



International Hybrid
Simulation of
Tommorow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1


PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor
Locations

S.18

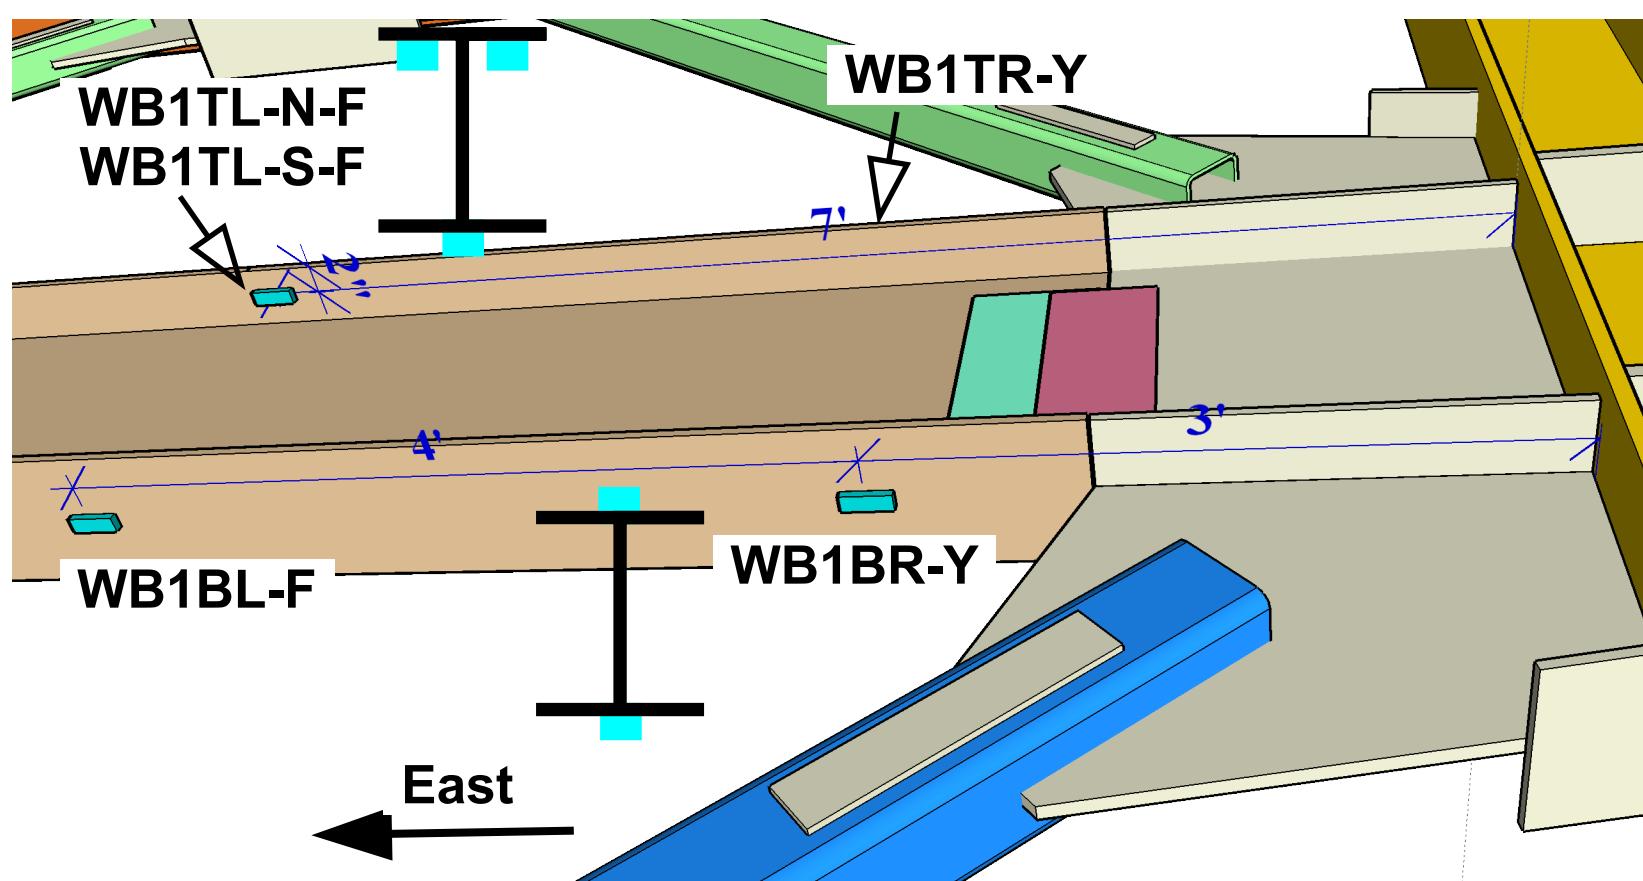

WB1TR-Y ...

WB1 = west lower beam; EB1 = east lower beam

TL = top left side; BL = bottom left side

TR = top right side; BR = bottom right side

N = north side; S = south side

F = FFLA strain gauge; Y = YFLA strain gauge

**(total ten strain gauge locations on the lower beam, key labels
are shown above; east side similar and symmetric)**



International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures


University of California,
Berkeley
TCBF-B-1

PROJECT
TCFB
PROJECT NO.
TCBF-B-1

ISSUE
Aug 01,
2009

DRAWN BY
J.W. Lai

Sensor Locations

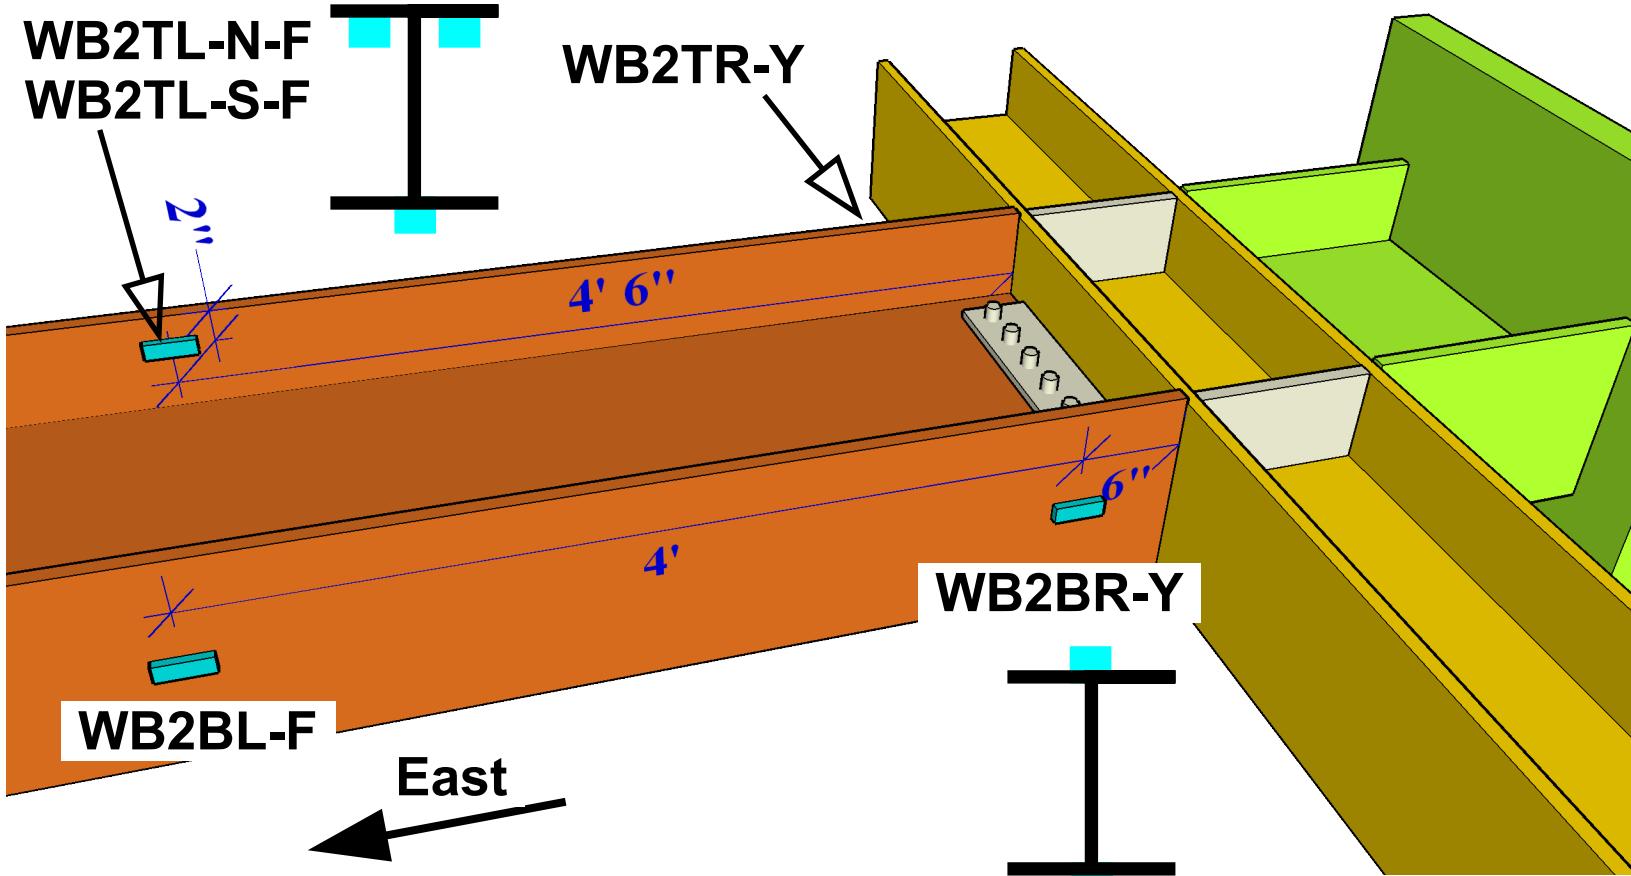

WB2TR-Y ...

WB2 = west roof beam; EB1 = east roof beam

TL = top left side; BL = bottom left side

TR = top right side; BR = bottom right side

N = north side; S = south side

F = FLA strain gauge; Y = YFLA strain gauge

(total ten strain gauge locations on the roof beam, key labels are shown above; east side similar and symmetric)




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCBF
TCBF-B-1
ISSUE
Aug 01,
2009
DRAWN BY
J.W. Lai

Sensor
Locations

S.20

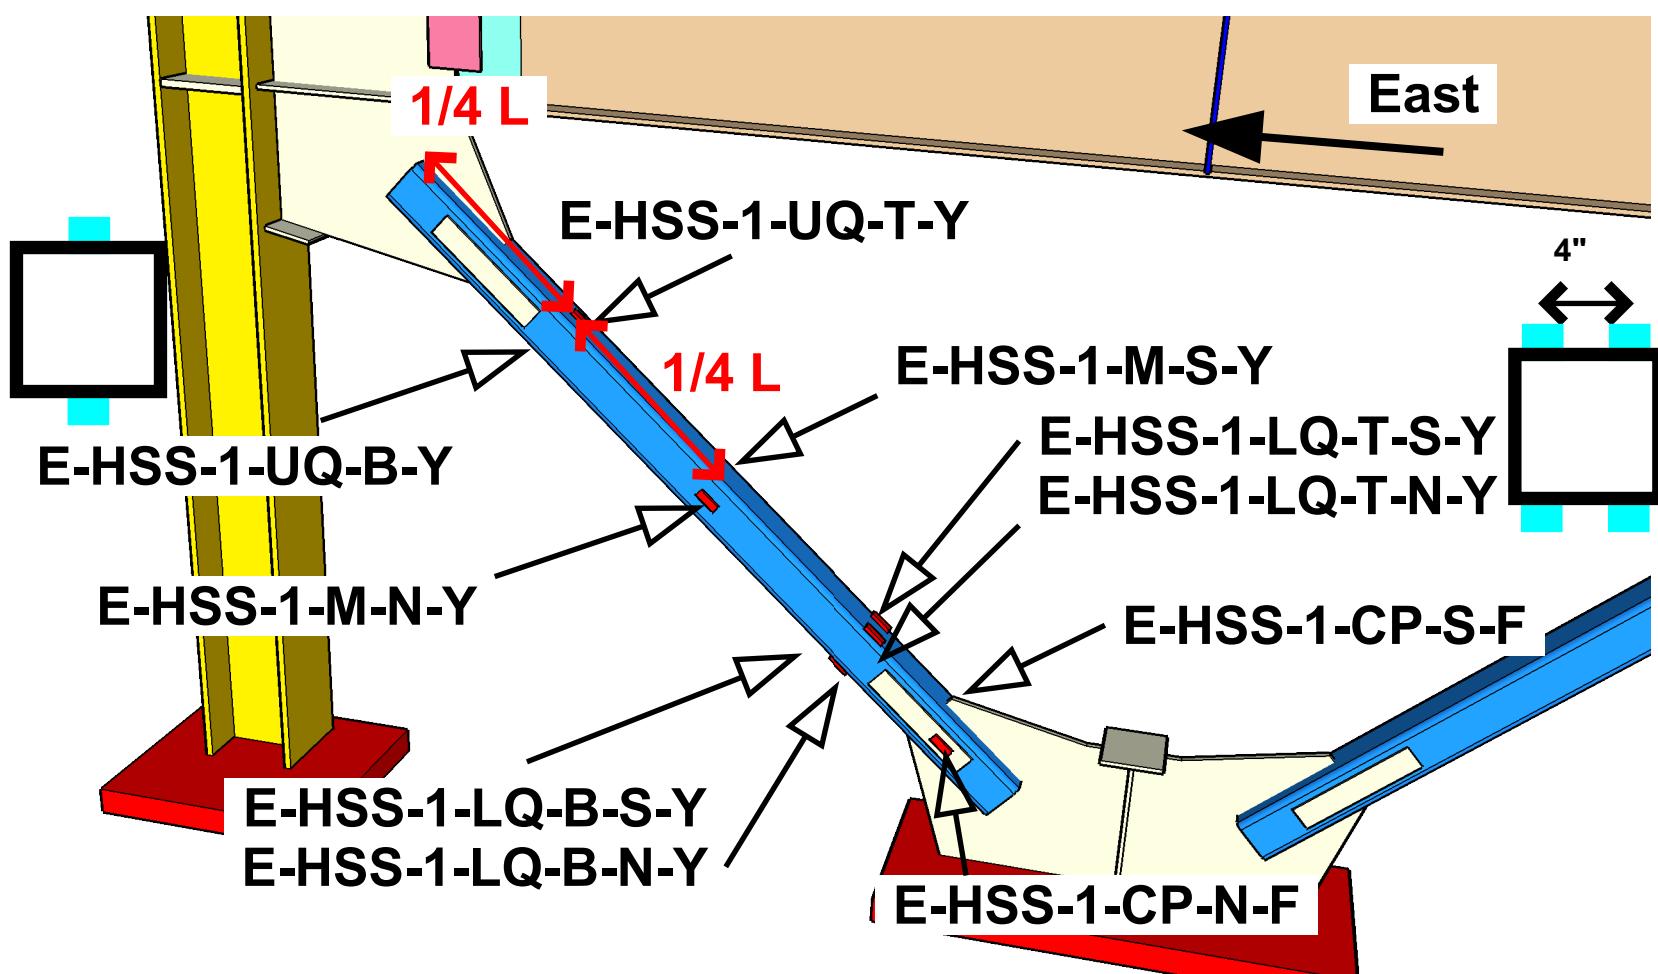

E-HSS = east HSS brace; **W-HSS** = west HSS brace; **1** = 1F
UQ = upper quarter point; **LQ** = lower quarter point; **M** = middle
T = top side; **B** = bottom side; **CP** = cover plate
N = north side; **S** = south side
F = FLA strain gauge; **Y** = YFLA strain gauge
(total ten strain gauge locations on each brace, key labels are
shown above; west side similar and symmetric)




International Hybrid
Simulation of
Tomorrow's Braced
Steel Frame
Structures

University of California,
Berkeley
TCBF-B-1

PROJECT NO.
TCBF
TCBF-B-1
ISSUE
Aug 01,
2009
DRAWN BY
J.W. Lai

Sensor
Locations

S.21

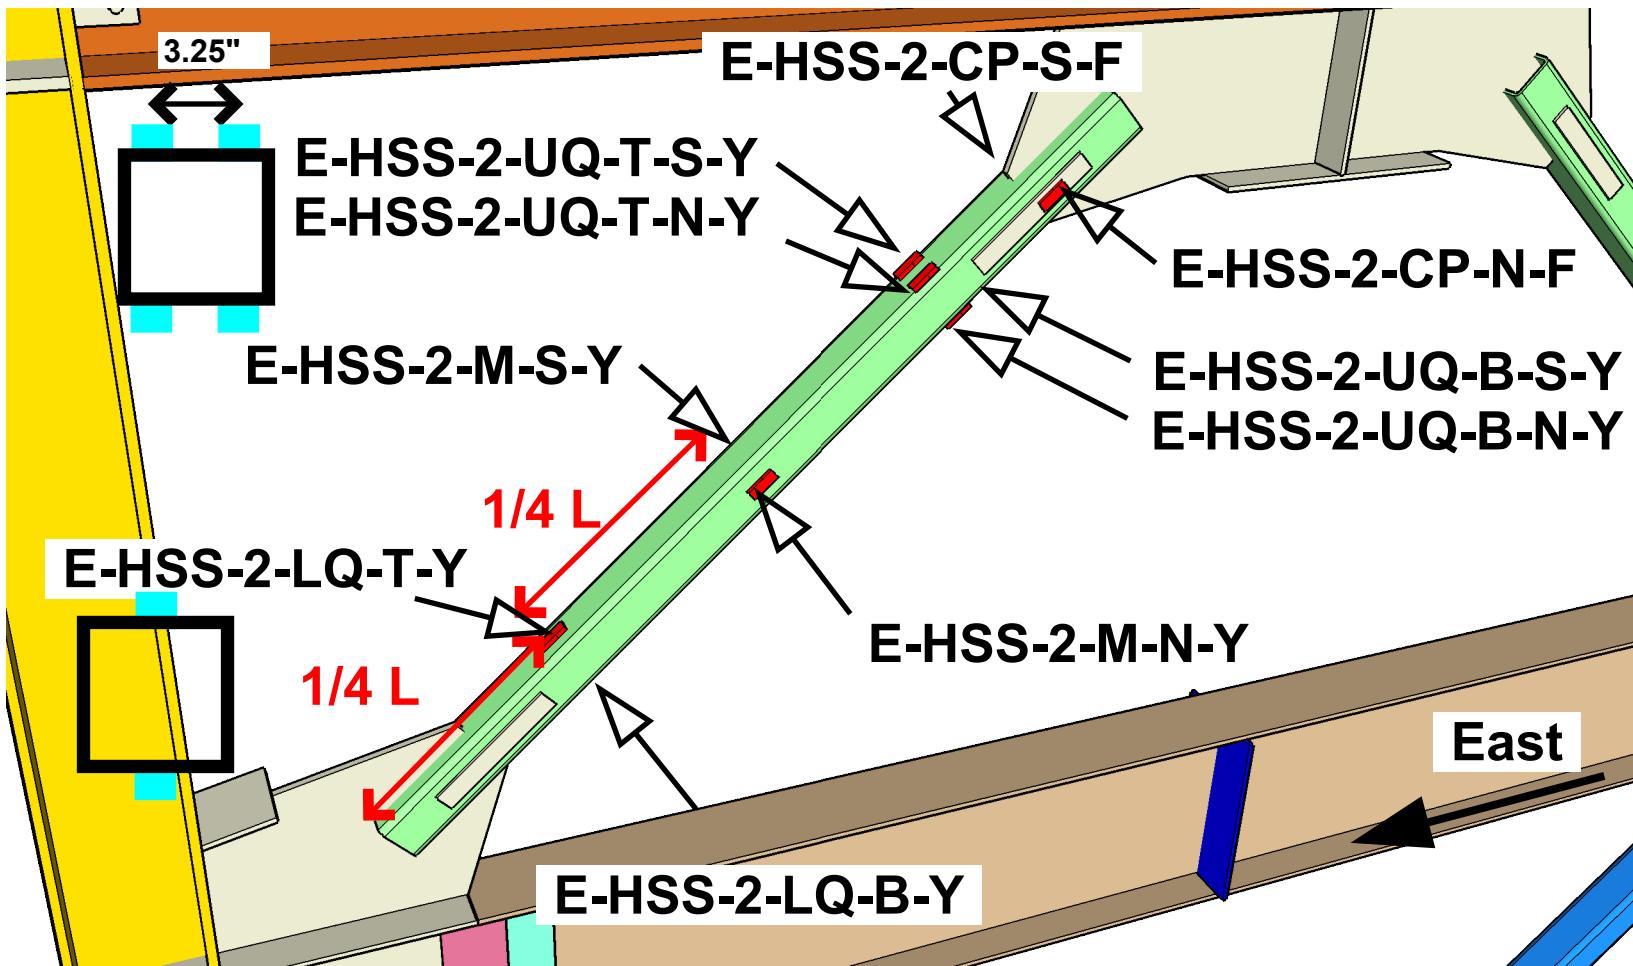

E-HSS = east HSS brace; **W-HSS** = west HSS brace; **2** = 2F
UQ = upper quarter point; **LQ** = lower quarter point; **M** = middle
T = top side; **B** = bottom side; **CP** = cover plate
N = north side; **S** = south side
F = FLA strain gauge; **Y** = YFLA strain gauge
(total ten strain gauge locations on each brace, key labels are shown above; west side similar and symmetric)

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
1	S1	EC1BL-F	strain gauge	-	-	13	0:3:0	1/4 bridge	14
2	S2	EC1BR-F	strain gauge	-	-	14	0:3:1	1/4 bridge	15
3	S3	EC1TL-F	strain gauge	-	-	15	0:3:2	1/4 bridge	16
4	S4	EC1TR-F	strain gauge	-	-	16	0:3:3	1/4 bridge	17
5	S5	E-HSS-1-UQ-T-Y	strain gauge	-	-	5	0:1:0	1/4 bridge	6
6	S6	E-HSS-1-UQ-B-Y	strain gauge	-	-	6	0:1:1	1/4 bridge	7
7	S7	E-HSS-1-M-N-Y	strain gauge	-	-	7	0:1:2	1/4 bridge	8
8	S8	E-HSS-1-M-S-Y	strain gauge	-	-	8	0:1:3	1/4 bridge	9
9	S9	E-HSS-1-LQ-T-N-Y	strain gauge	-	-	9	0:2:0	1/4 bridge	10
10	S10	E-HSS-1-LQ-T-S-Y	strain gauge	-	-	10	0:2:1	1/4 bridge	11
11	S11	E-HSS-1-LQ-B-N-Y	strain gauge	-	-	11	0:2:2	1/4 bridge	12
12	S12	E-HSS-1-LQ-B-S-Y	strain gauge	-	-	12	0:2:3	1/4 bridge	13
13	S13	E-HSS-1-CP-N-F	strain gauge	-	-	3	0:0:2	1/4 bridge	4
14	S14	E-HSS-1-CP-S-F	strain gauge	-	-	4	0:0:3	1/4 bridge	5
15	S15	EB1BL-Y	strain gauge	-	-	45	0:11:0	1/4 bridge	46
16	S16	EB1TL-Y	strain gauge	-	-	44	0:10:3	1/4 bridge	45
17	S17	EB1BR-F	strain gauge	-	-	204/70	1:1:1	1/4 bridge	71
18	S18	EB1TR-N-F	strain gauge	-	-	46	0:11:1	full-bridge	47
19	S19	EB1TR-S-F	strain gauge	-	-	46	0:11:1	full-bridge	47
20	S20	WB1BL-F	strain gauge	-	-	342/68	1:0:3	1/4 bridge	69
21	S21	WB1TL-N-F	strain gauge	-	-	322/69	1:1:0	full-bridge	70
22	S22	WB1TL-S-F	strain gauge	-	-	322/69	1:1:0	full-bridge	70
23	S23	WB1BR-Y	strain gauge	-	-	338/84	1:4:3	1/4 bridge	85
24	S24	WB1TR-Y	strain gauge	-	-	325/57	0:14:0	1/4 bridge	58
25	S25	W-HSS-1-CP-N-F	strain gauge	-	-	1	0:0:0	1/4 bridge	2
26	S26	W-HSS-1-CP-S-F	strain gauge	-	-	2	0:0:1	1/4 bridge	3
27	S27	W-HSS-1-LQ-T-N-Y	strain gauge	-	-	25	0:6:0	1/4 bridge	26
28	S28	W-HSS-1-LQ-T-S-Y	strain gauge	-	-	26	0:6:1	1/4 bridge	27
29	S29	W-HSS-1-LQ-B-N-Y	strain gauge	-	-	27	0:6:2	1/4 bridge	28
30	S30	W-HSS-1-LQ-B-S-Y	strain gauge	-	-	28	0:6:3	1/4 bridge	29
31	S31	W-HSS-1-M-N-Y	strain gauge	-	-	29	0:7:0	1/4 bridge	30
32	S32	W-HSS-1-M-S-Y	strain gauge	-	-	30	0:7:1	1/4 bridge	31
33	S33	W-HSS-1-UQ-T-Y	strain gauge	-	-	31	0:7:2	1/4 bridge	32
34	S34	W-HSS-1-UQ-B-Y	strain gauge	-	-	32	0:7:3	1/4 bridge	33

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
35	S35	WC1TL-F	strain gauge	-	-	95	1:7:2	1/4 bridge	96
36	S36	WC1TR-F	strain gauge	-	-	93	1:7:0	1/4 bridge	94
37	S37	WC1BL-F	strain gauge	-	-	94	1:7:1	1/4 bridge	95
38	S38	WC1BR-F	strain gauge	-	-	92	1:6:3	1/4 bridge	93
39	S39	EC2BL-F	strain gauge	-	-	39	0:9:2	1/4 bridge	40
40	S40	EC2BR-F	strain gauge	-	-	40	0:9:3	1/4 bridge	41
41	S41	EC2TL-F	strain gauge	-	-	41	0:10:0	1/4 bridge	42
42	S42	EC2TR-F	strain gauge	-	-	42	0:10:1	1/4 bridge	43
43	S43	EB2BL-Y	strain gauge	-	-	43	0:10:2	1/4 bridge	44
44	S44	EB2TL-Y	strain gauge	-	-	200/348	2:4:3	1/4 bridge	149
45	S45	EB2BR-F	strain gauge	-	-	197/145	2:4:0	1/4 bridge	146
46	S46	EB2TR-N-F	strain gauge	-	-	199/147	2:4:2	full-bridge	148
47	S47	EB2TR-S-F	strain gauge	-	-	199/147	2:4:2	full-bridge	148
48	S48	E-HSS-2-LQ-T-Y	strain gauge	-	-	48	0:11:3	1/4 bridge	49
49	S49	E-HSS-2-LQ-B-Y	strain gauge	-	-	49	0:12:0	1/4 bridge	50
50	S50	E-HSS-2-M-N-Y	strain gauge	-	-	50	0:12:1	1/4 bridge	51
51	S51	E-HSS-2-M-S-Y	strain gauge	-	-	51	0:12:2	1/4 bridge	52
52	S52	E-HSS-2-UQ-T-N-Y	strain gauge	-	-	52	0:12:3	1/4 bridge	53
53	S53	E-HSS-2-UQ-T-S-Y	strain gauge	-	-	53	0:13:0	1/4 bridge	54
54	S54	E-HSS-2-UQ-B-N-Y	strain gauge	-	-	54	0:13:1	1/4 bridge	55
55	S55	E-HSS-2-UQ-B-S-Y	strain gauge	-	-	55	0:13:2	1/4 bridge	56
56	S56	E-HSS-2-CP-N-F	strain gauge	-	-	56	0:13:3	1/4 bridge	57
57	S57	E-HSS-2-CP-S-F	strain gauge	-	-	47	0:11:2	1/4 bridge	48
58	S58	W-HSS-2-CP-N-F	strain gauge	-	-	324/58	0:14:1	1/4 bridge	59
59	S59	W-HSS-2-CP-S-F	strain gauge	-	-	326/59	0:14:2	1/4 bridge	60
60	S60	W-HSS-2-UQ-T-N-Y	strain gauge	-	-	333/60	0:14:3	1/4 bridge	61
61	S61	W-HSS-2-UQ-T-S-Y	strain gauge	-	-	327/61	0:15:0	1/4 bridge	62
62	S62	W-HSS-2-UQ-B-N-Y	strain gauge	-	-	320/62	0:15:1	1/4 bridge	63
63	S63	W-HSS-2-UQ-B-S-Y	strain gauge	-	-	321/63	0:15:2	1/4 bridge	64
64	S64	W-HSS-2-M-N-Y	strain gauge	-	-	322/64	0:15:3	1/4 bridge	65
65	S65	W-HSS-2-M-S-Y	strain gauge	-	-	203/65	1:0:0	1/4 bridge	66
66	S66	W-HSS-2-LQ-T-Y	strain gauge	-	-	315/66	1:0:1	1/4 bridge	67
67	S67	W-HSS-2-LQ-B-Y	strain gauge	-	-	343/67	1:0:2	1/4 bridge	68
68	S68	WB2BL-F	strain gauge	-	-	346/137	2:2:0	1/4 bridge	138

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
69	S69	WB2TL-N-F	strain gauge	-	-	328/138	2:2:1	full-bridge	139
70	S70	WB2TL-S-F	strain gauge	-	-	328/138	2:2:1	full-bridge	139
71	S71	WB2BR-Y	strain gauge	-	-	201/71	1:1:2	1/4 bridge	72
72	S72	WB2TR-Y	strain gauge	-	-	345/140	2:2:3	1/4 bridge	141
73	S73	WC2TL-F	strain gauge	-	-	316/73	1:2:0	1/4 bridge	74
74	S74	WC2TR-F	strain gauge	-	-	349/74	1:2:1	1/4 bridge	75
75	S75	WC2BL-F	strain gauge	-	-	351/75	1:2:2	1/4 bridge	76
76	S76	WC2BR-F	strain gauge	-	-	318/76	1:2:3	1/4 bridge	77
77	R1-1	EC1-B-N-1-YR	rosette	-	-	17	0:4:0	1/4 bridge	18
78	R1-2	EC1-B-N-2-YR	rosette	-	-	18	0:4:1	1/4 bridge	19
79	R1-3	EC1-B-N-3-YR	rosette	-	-	19	0:4:2	1/4 bridge	20
80	R2-1	EC1-PZ-N-1-YR	rosette	-	-	33	0:8:0	1/4 bridge	34
81	R2-2	EC1-PZ-N-2-YR	rosette	-	-	34	0:8:1	1/4 bridge	35
82	R2-3	EC1-PZ-N-3-YR	rosette	-	-	35	0:8:2	1/4 bridge	36
83	R3-1	EC2-B-N-1-YR	rosette	-	-	36	0:8:3	1/4 bridge	37
84	R3-2	EC2-B-N-2-YR	rosette	-	-	37	0:9:0	1/4 bridge	38
85	R3-3	EC2-B-N-3-YR	rosette	-	-	38	0:9:1	1/4 bridge	39
86	R4-1	EC2-PZ-N-1-YR	rosette	-	-	196/149	2:5:0	1/4 bridge	150
87	R4-2	EC2-PZ-N-2-YR	rosette	-	-	198/150	2:5:1	1/4 bridge	151
88	R4-3	EC2-PZ-N-3-YR	rosette	-	-	195/151	2:5:2	1/4 bridge	152
89	R5-1	WC1-B-N-1-YR	rosette	-	-	89	1:6:0	1/4 bridge	90
90	R5-2	WC1-B-N-2-YR	rosette	-	-	90	1:6:1	1/4 bridge	91
91	R5-3	WC1-B-N-3-YR	rosette	-	-	91	1:6:2	1/4 bridge	92
92	R6-1	WC1-PZ-N-1-YR	rosette	-	-	317/77	1:3:0	1/4 bridge	78
93	R6-2	WC1-PZ-N-2-YR	rosette	-	-	350/78	1:3:1	1/4 bridge	79
94	R6-3	WC1-PZ-N-3-YR	rosette	-	-	302/79	1:3:2	1/4 bridge	80
95	R7-1	WC2-B-N-1-YR	rosette	-	-	301/80	1:3:3	1/4 bridge	81
96	R7-2	WC2-B-N-2-YR	rosette	-	-	323/81	1:4:0	1/4 bridge	82
97	R7-3	WC2-B-N-3-YR	rosette	-	-	336/82	1:4:1	1/4 bridge	83
98	R8-1	WC2-PZ-N-1-YR	rosette	-	-	352/141	2:3:0	1/4 bridge	142
99	R8-2	WC2-PZ-N-2-YR	rosette	-	-	319/142	2:3:1	1/4 bridge	143
100	R8-3	WC2-PZ-N-3-YR	rosette	-	-	329/143	2:3:2	1/4 bridge	144
101	R9-1	1F-E-BG-TL-1-N-YR	rosette	-	-	101	1:9:0	1/4 bridge	102
102	R9-2	1F-E-BG-TL-2-N-YR	rosette	-	-	102	1:9:1	1/4 bridge	103

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
103	R9-3	1F-E-BG-TL-3-N-YR	rosette	-	-	103	1:9:2	1/4 bridge	104
104	R10-1	1F-E-BG-BL-1-N-YR	rosette	-	-	104	1:9:3	1/4 bridge	105
105	R10-2	1F-E-BG-BL-2-N-YR	rosette	-	-	105	1:10:0	1/4 bridge	106
106	R10-3	1F-E-BG-BL-3-N-YR	rosette	-	-	106	1:10:1	1/4 bridge	107
107	R11-1	1F-E-BG-TR-1-N-YR	rosette	-	-	107	1:10:2	1/4 bridge	108
108	R11-2	1F-E-BG-TR-2-N-YR	rosette	-	-	108	1:10:3	1/4 bridge	109
109	R11-3	1F-E-BG-TR-3-N-YR	rosette	-	-	109	1:11:0	1/4 bridge	110
110	R12-1	1F-E-BG-TC-1-N-YR	rosette	-	-	110	1:11:1	1/4 bridge	111
111	R12-2	1F-E-BG-TC-2-N-YR	rosette	-	-	111	1:11:2	1/4 bridge	112
112	R12-3	1F-E-BG-TC-3-N-YR	rosette	-	-	112	1:11:3	1/4 bridge	113
113	R13-1	1F-E-MG-TL-1-N-YR	rosette	-	-	113	1:12:0	1/4 bridge	114
114	R13-2	1F-E-MG-TL-2-N-YR	rosette	-	-	114	1:12:1	1/4 bridge	115
115	R13-3	1F-E-MG-TL-3-N-YR	rosette	-	-	115	1:12:2	1/4 bridge	116
116	R14-1	1F-E-MG-BL-1-N-YR	rosette	-	-	116	1:12:3	1/4 bridge	117
117	R14-2	1F-E-MG-BL-2-N-YR	rosette	-	-	117	1:13:0	1/4 bridge	118
118	R14-3	1F-E-MG-BL-3-N-YR	rosette	-	-	118	1:13:1	1/4 bridge	119
119	R15-1	1F-E-MG-TR-1-N-YR	rosette	-	-	119	1:13:2	1/4 bridge	120
120	R15-2	1F-E-MG-TR-2-N-YR	rosette	-	-	120	1:13:3	1/4 bridge	121
121	R15-3	1F-E-MG-TR-3-N-YR	rosette	-	-	121	1:14:0	1/4 bridge	122
122	R16-1	1F-E-MG-BR-1-N-YR	rosette	-	-	122	1:14:1	1/4 bridge	123
123	R16-2	1F-E-MG-BR-2-N-YR	rosette	-	-	123	1:14:2	1/4 bridge	124
124	R16-3	1F-E-MG-BR-3-N-YR	rosette	-	-	124	1:14:3	1/4 bridge	125
125	R17-1	1F-E-TG-TL-1-N-YR	rosette	-	-	125	1:15:0	1/4 bridge	126
126	R17-2	1F-E-TG-TL-2-N-YR	rosette	-	-	126	1:15:1	1/4 bridge	127
127	R17-3	1F-E-TG-TL-3-N-YR	rosette	-	-	127	1:15:2	1/4 bridge	128
128	R18-1	1F-E-TG-BL-1-N-YR	rosette	-	-	128	1:15:3	1/4 bridge	129
129	R18-2	1F-E-TG-BL-2-N-YR	rosette	-	-	129	2:0:0	1/4 bridge	130
130	R18-3	1F-E-TG-BL-3-N-YR	rosette	-	-	130	2:0:1	1/4 bridge	131
131	R19-1	1F-E-TG-BC-1-N-YR	rosette	-	-	131	2:0:2	1/4 bridge	132
132	R19-2	1F-E-TG-BC-2-N-YR	rosette	-	-	303	2:0:3	1/4 bridge	133
133	R19-3	1F-E-TG-BC-3-N-YR	rosette	-	-	133	2:1:0	1/4 bridge	134
134	R20-1	1F-E-TG-BR-1-N-YR	rosette	-	-	134	2:1:1	1/4 bridge	135
135	R20-2	1F-E-TG-BR-2-N-YR	rosette	-	-	135	2:1:2	1/4 bridge	136
136	R20-3	1F-E-TG-BR-3-N-YR	rosette	-	-	136	2:1:3	1/4 bridge	137

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
137	WP07	1F-E-HSS-UQ-R-OD	wire pot	30"	2000NC51151	159	2:7:2	-	160
138	WP04	1F-E-HSS-M-R-OD	wire pot	40"	2005NC51006	156	2:6:3	-	157
139	WP02	1F-E-HSS-LQ-R-OD	wire pot	30"	2006NC51015	154	2:6:1	-	155
140	WP03	1F-E-HSS-UQ-L-OD	wire pot	30"	2006NC51012	155	2:6:2	-	156
141	WP05	1F-E-HSS-M-L-OD	wire pot	40"	2005NC01003	157	2:7:0	-	158
142	WP01	1F-E-HSS-LQ-L-OD	wire pot	30"	2006NC51014	153	2:6:0	-	154
143	WP06	1F-W-HSS-LQ-R-OD	wire pot	30"	2000NC51124	158	2:7:1	-	159
144	WP12	1F-W-HSS-M-R-OD	wire pot	40"	2005NC01008	164	2:8:3	-	165
145	WP09	1F-W-HSS-UQ-R-OD	wire pot	30"	2000NC51106	161	2:8:0	-	162
146	WP08	1F-W-HSS-LQ-L-OD	wire pot	30"	2006NC51016	160	2:7:3	-	161
147	WP11	1F-W-HSS-M-L-OD	wire pot	40"	2005NC01006	163	2:8:2	-	164
148	WP10	1F-W-HSS-UQ-L-OD	wire pot	30"	2000NC51116	162	2:8:1	-	163
149	WP14	2F-E-HSS-LQ-R-OD	wire pot	30"	2006NC51013	166/305	2:9:1	-	167
150	WP17	2F-E-HSS-M-R-OD	wire pot	40"	2005NC51002	169/308	2:10:0	-	170
151	WP13	2F-E-HSS-UQ-R-OD	wire pot	30"	2000NC51114	165/304	2:9:0	-	166
152	WP16	2F-E-HSS-LQ-L-OD	wire pot	30"	2000NC51125	168/307	2:9:3	-	169
153	WP18	2F-E-HSS-M-L-OD	wire pot	40"	2005NC51007	170/309	2:10:1	-	171
154	WP15	2F-E-HSS-UQ-L-OD	wire pot	30"	2000NC51105	167/306	2:9:2	-	168
155	WP22	2F-W-HSS-UQ-R-OD	wire pot	40"	2005NC01010	174/313	2:11:1	-	175
156	WP20	2F-W-HSS-M-R-OD	wire pot	40"	2005NC01009	172/311	2:10:3	-	173
157	WP24	2F-W-HSS-LQ-R-OD	wire pot	30"	2000NC51153	176/315	2:11:3	-	177
158	WP21	2F-W-HSS-UQ-L-OD	wire pot	40"	2005NC51010	173/312	2:11:0	-	174
159	WP19	2F-W-HSS-M-L-OD	wire pot	40"	2005NC01007	171/310	2:10:2	-	172
160	WP23	2F-W-HSS-LQ-L-OD	wire pot	30"	2000NC51111	175/314	2:11:2	-	176
161	WP25	1F-E-HSS-A	wire pot	40"	2005NC51009	177	2:12:0	-	178
162	WP26	1F-W-HSS-A	wire pot	40"	2005NC01004	178	2:12:1	-	179
163	WP27	2F-E-HSS-A	wire pot	40"	2005NC01001	300	2:14:0	-	186
164	WP28	2F-W-HSS-A	wire pot	40"	2000NC51131	301	2:14:1	-	187
165	WP34	1F-E-BG-A	wire pot	40"	2005NC51004	97	2:13:0	-	182
166	WP35	1F-LG-A	wire pot	40"	2005NC51008	98	2:13:1	-	183
167	WP37	1F-RG-A	wire pot	40"	2000NC51130	100	2:13:3	-	185
168	WP36	1F-W-BG-A	wire pot	30"	2000NC51149	307	2:13:2	-	184
169	WP38	1F-E-TG-A	wire pot	30"	2000NC51113	183	1:8:0	-	98
170	WP39	2F-LG-A	wire pot	30"	2000NC51109	184	1:8:1	-	99

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
171	WP40	2F-RG-A	wire pot	30"	2000NC51156	318	1:8:2	-	100
172	WP41	1F-W-TG-A	wire pot	30"	2000NC51115	319	1:8:3	-	101
173	WP30	1F-C-G-TS-OD	wire pot	40"	2005NC01005	21	0:5:0	-	22
174	WP47	1F-W-TG-C-OD	wire pot	30"	2000NC51150	313	1:5:3	-	89
175	WP33	1F-E-BG-C-OD	wire pot	40"	2005NC51001	24	0:5:3	-	25
176	WP29	1F-W-BG-C-OD	wire pot	40"	2005NC51005	20	0:4:3	-	21
177	WP43	1F-E-BG-B-OD	wire pot	30"	2000NC51098	320	1:4:2	-	84
178	WP31	1F-C-B-BF-OD	wire pot	30"	2000NC51128	22	0:5:1	-	23
179	WP32	1F-C-B-CS-OD	wire pot	40"	2005NC51003	23	0:5:2	-	24
180	WP42	1F-W-BG-B-OD	wire pot	30"	2000NC51117	314	1:1:3	-	73
181	WP46	1F-E-TG-C-OD	wire pot	30"	2000NC51152	312	1:5:2	-	88
182	WP44	2F-C-B-BF-OD	wire pot	30"	2000NC51126	310	1:5:0	-	86
183	WP45	2F-C-G-BS-OD	wire pot	30"	2000NC51129	311	1:5:1	-	87
184	A5	Act2disp	position transducer	40"	2007NC01001	182/363	2:12:3	ST01	181
185	ST2	C-GB-Slip	stick	1"	2004NC01015	181/358	2:12:2	-	180
186	ST3	W-CB-Slip	stick	1"	2004NC01012	96/357	1:7:3	-	97
187	ST4	E-LC1-OD	stick	6"	2007NC01009	179	2:15:2	-	192
188	ST5	E-LC2-OD	stick	6"	2007NC01010	302	2:14:2	-	188
189	ST6	C-LC1-OD	stick	6"	2007NC01011	180	2:15:3	-	193
190	ST7	C-LC2-OD	stick	6"	2007NC51006	303	2:14:3	-	189
191	ST8	W-LC1-OD	stick	6"	2007NC51007	304	2:15:0	-	190
192	ST9	W-LC2-OD	stick	6"	2007NC51010	305	2:15:1	-	191
193	ST10	C-B1-VD	stick	4"	2007NC01006	144	2:3:3	-	145
194	ST11	C-B2-VD	stick	4"	2007NC01003	210	2:5:3	Novo100_02-210	153
195	TI1	EB1-S-TI	tiltmeter	10 Deg	2004NC04008	316	2:2:2	Tilt1	140
196	TI2	WB1-S-TI	tiltmeter	10 Deg	2004NC04007	323	2:4:1	Tilt2	147
197	PT1	EC1-PZ-E-PT	position transducer	40"	-	-	-	not use	-
198	PT2	EC2-PZ-E-PT	position transducer	40"	-	CS2-disp	3:0:4	Displacement Control	198
199	A1	Act1disp	position transducer	40"	2006NC01002	CS1-disp	3:0:0	-	194
200	A2	Act1force	load cell	-	-	CS1-load	3:0:1	From LC1	195
201	A3	Act1dispCmd	-	-	-	-	3:0:2	From STS (CMD)	196
202	A4	Act1dispAct3	position transducer	40"	2006NC01003	CS3-disp	3:0:3	-	197
203	PT2	EC2-PZ-E-PT	position transducer	40"	-	CS2-disp	3:0:4	Act2disp (A5)	198
204	A6	Act2force	load cell	-	-	CS2-load	3:0:5	From LC2	199

Channel	ID	Label	Device	Range	Serial No.	Cable No.	DAQ Box ID	Note	Column #
205	A7	Act2dispCmd	-	-	-	-	3:0:6	From STS (CMD)	200
206	A8	Act2dispAct4	position transducer	40"	2004NC01061	CS4-disp	3:0:7	-	201
207	ST12	FB-Slip	stick	4"	2004NC01023	308	3:1:0	D-Space (Novo50_DS1)	202
208	ST13	RRW-Slip-N	stick	4"	2004NC01019	309	3:1:1	D-Space (Novo50_DS2)	203
209	ST14	RRW-Slip-S	stick	4"	2004NC01028	306	3:1:2	D-Space (Novo50_DS3)	204
210	ST15	Act1-BK	stick	1"	2004NC01025	361	3:1:3	D-Space (Novo50_DS4)	205
211	ST16	Act2-BK	stick	1"	2004NC01020	355	3:1:4	D-Space (Novo50_DS5)	206
212	TG1	TriggerCanon	-	-	-	207	3:1:5	D-Space	207
213	TG2	TriggerLeica	-	-	-	208	3:1:6	D-Space	208
214	ST1	E-CB-Slip	stick	1"	2004NC01014	379	3:1:7	D-Space	209